

CATACAOS  
SCONCE


10" W  
16½" H



B O Y D  
L I G H T I N G


10214

Required information for all fixture orders


Product Number / Name	Product Information	1 Lamping, Lamp Type	2 Other Requirements	3 Finish												
<p>IO214 Catacaos Sconce</p> 	<table border="1"> <tr> <td><u>Height</u></td> <td><u>Width</u></td> <td><u>Projection</u></td> <td><u>Net Wt.</u></td> </tr> <tr> <td>16½"</td> <td>10"</td> <td>4"</td> <td>13 lbs</td> </tr> <tr> <td>419 mm</td> <td>254 mm</td> <td>102 mm</td> <td>5.9 kg</td> </tr> </table> <p>Center of outlet box to top of fixture: 8¼"; 210 mm ADA compliant at any mounting height</p> <p><b>Other Information:</b> UL listed (or equivalent) for damp locations Interior front diffuser: gloss white acrylic</p> <p>Decorative grille and frame: matte white Can be mounted horizontally or vertically</p>	<u>Height</u>	<u>Width</u>	<u>Projection</u>	<u>Net Wt.</u>	16½"	10"	4"	13 lbs	419 mm	254 mm	102 mm	5.9 kg	<p>Fluorescent</p> <ul style="list-style-type: none"> <li>• Non-Dimming Two, CFQ13W/G24q</li> <li>• Dimming Two, CFTR18W/GX24q-2</li> </ul> <p>Upcharges will apply for fluorescent dimming. Please contact your local Boyd rep with the specification of the dimming control system being used.</p>	<p>FLO voltage:</p> <ul style="list-style-type: none"> <li>• 120</li> <li>• 277</li> </ul>	<ul style="list-style-type: none"> <li>• Matte White (MW)</li> </ul>
<u>Height</u>	<u>Width</u>	<u>Projection</u>	<u>Net Wt.</u>													
16½"	10"	4"	13 lbs													
419 mm	254 mm	102 mm	5.9 kg													




IO216 Catacaos Pendant (24")

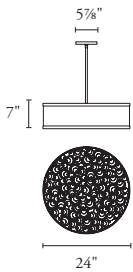


IO217 Catacaos Pendant (30")

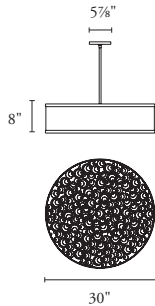

IO225 Catacaos Pendant (48")

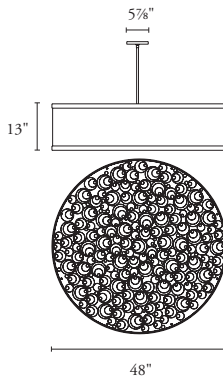

IO218 Catacaos Ceiling (24")



IO219 Catacaos Ceiling (30")

