

B O Y D




ELEMENTS: FIRE
LED IN-WALL

#10674

SHOWN IN 22K YELLOW GOLD LEAF REFLECTOR
AND BLACKENED FRAME

**10674 Elements: Fire
LED In-Wall 3'**

Height	Width	Projection	Net Wt.
36 ⁵ / ₈ "	5 ⁵ / ₈ "	1/ ₈ "	16 lbs
930 mm	143 mm	3 mm	7.3 kg

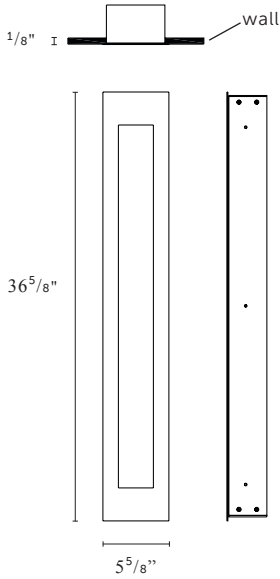

Backbox: 5" H x 36" W x 3¹/₄" D;
127 mm x 914 mm x 83 mm

Center of outlet box to top of fixture:
18¹/₄"; 464 mm

Reflector: brass plate gilded with gold leaf

Backbox: unfinished aluminum

Outer Frame: available in White Primer for painting (standard), or Blackened Steel (upcharge)

Horizontal or vertical mounting

This fixture requires recessed mounting. See full installation instructions for mounting details.

ADA compliant at all mounting heights

UL listed (or equivalent) for damp locations

Optional Cover Lens: clear acrylic (upcharge)

REQUIRED INFORMATION

- Length: 36" nominal or 48" nominal



LAMPING

LED

- 2700°K / 90+ CRI
- 40 total watts
- Lamp included with fixture

Fixture can be dimmed using 0-10v low-voltage dimming controls and wiring

STANDARD FINISHES

Outer Frame
• White Primer

Inner Reflector Panel
• 22k Yellow Gold Leaf
• 12k White Gold Leaf


OPTIONAL

Outer Frame
• Blackened

Cover Lens
• clear acrylic

**10674 Elements: Fire
LED In-Wall 4'**

Height	Width	Projection	Net Wt.
48 ⁵ / ₈ "	5 ⁵ / ₈ "	1/ ₈ "	21 lbs
1235 mm	143 mm	3 mm	9.5 kg

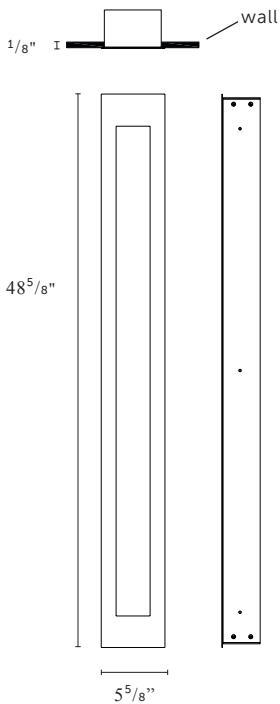

Backbox: 5" H x 48" W x 3¹/₄" D;
127 mm x 1219 mm x 83 mm

Center of outlet box to top of fixture:
24¹/₄"; 616 mm

Reflector: brass plate gilded with gold leaf

Backbox: unfinished aluminum

Outer Frame: available in White Primer for painting (standard), or Blackened Steel (upcharge)

Horizontal or vertical mounting

This fixture requires recessed mounting. See full installation instructions for mounting details.

ADA compliant at all mounting heights

UL listed (or equivalent) for damp locations

Optional Cover Lens: clear acrylic (upcharge)

REQUIRED INFORMATION

- Length: 36" nominal or 48" nominal



LAMPING

LED

- 2700°K / 90+ CRI
- 56 total watts
- Lamp included with fixture

Fixture can be dimmed using 0-10v low-voltage dimming controls and wiring

STANDARD FINISHES

Outer Frame
• White Primer

Inner Reflector Panel
• 22k Yellow Gold Leaf
• 12k White Gold Leaf

OPTIONAL

Outer Frame
• Blackened

Cover Lens
• clear acrylic