

B O Y D




I WALL SCONCE  
2', 3' AND 4'

#10140

SHOWN IN POLISHED NICKEL  
AND MIRROR MOUNTED WITHOUT BACKPLATES

**10140 Iwall  
Sconce (4')**

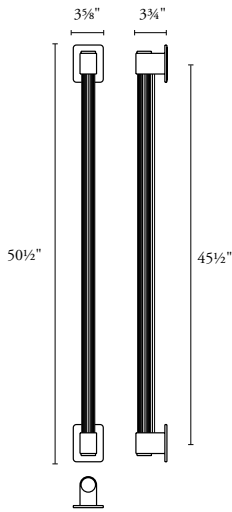

Height	Width	Projection	Net Wt.
50 1/2"	3 5/8"	3 3/4"	10 lbs
1280 mm	92 mm	95 mm	4.5 kg

Backplates: 3 5/8" W x 4 1/2" H x 1/4"; 92 x 114 x 6 mm  
 Center of outlet box to top of fixture: 2 1/4"; 57mm  
 ADA compliant at any mounting height  
 UL listed (or equivalent) for damp locations  
 Diffuser: clear, fluted glass with white spun filter  
 Partially obscured 1/4" Polished Nickel wire way  
 Horizontal or vertical mounting. Must mount to a mud-ring or switch-box  
 Optional: mirror mount modification available (no backplates)  
 Photometric report and ies file available for download at [www.boydlighting.com](http://www.boydlighting.com)



**LAMPING**

**Fluorescent**

- One, F28WT5/Mini Bi-pin
- Voltage 120v or 277v (non-dimming)

Upcharges will apply for fluorescent remote dimming. Contact your local Boyd rep with the specification of the dimming control system being used.

Lamp not included with fixture.

**SPECIALTY FINISHES**


- Polished Nickel
- Satin Nickel

**OPTIONAL**

**Fluorescent Dimming**

- High Output: 54w
- Standard Output: 28w

**10139 Iwall  
Sconce (3')**

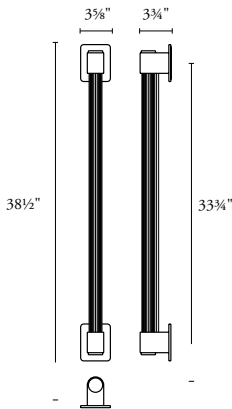

Height	Width	Projection	Net Wt.
38 1/2"	3 5/8"	3 3/4"	9 lbs
978 mm	92 mm	95 mm	4.1 kg

Backplates: 3 5/8" W x 4 1/2" H x 1/4"; 92 x 114 x 6 mm  
 Center of outlet box to top of fixture: 2 1/4"; 57mm  
 ADA compliant at any mounting height  
 UL listed (or equivalent) for damp locations  
 Diffuser: clear, fluted glass with white spun filter  
 Partially obscured 1/4" polished nickel wire way  
 Horizontal or vertical mounting. Must mount to a mud-ring or switch-box  
 Optional: mirror mount modification available (no backplates)  
 Photometric report and ies file available for download at [www.boydlighting.com](http://www.boydlighting.com)



**LAMPING**

**Fluorescent**

- One, F21WT5/Mini Bi-pin
- Voltage 120v or 277v (non-dimming)

Upcharges will apply for fluorescent remote dimming. Contact your local Boyd rep with the specification of the dimming control system being used.

Lamp not included with fixture.

**SPECIALTY FINISHES**


- Polished Nickel
- Satin Nickel

**OPTIONAL**

**Fluorescent Dimming**

- High Output: 39w
- Standard Output: 21w

**10138 Iwall  
Sconce (2')**



Height	Width	Projection	Net Wt.
26 3/4"	3 5/8"	3 3/4"	8 lbs
679 mm	92 mm	95 mm	3.6 kg

Backplates: 3 5/8" W x 4 1/2" H x 1/4"; 92 x 114 x 6 mm  
 Center of outlet box to top of fixture: 2 1/4"; 57 mm  
 ADA compliant at any mounting height  
 UL listed (or equivalent) for damp locations  
 Diffuser: clear, fluted glass with white spun filter  
 Partially obscured 1/4" polished nickel wire way  
 Horizontal or vertical mounting. Must mount to a mud-ring or switch-box  
 Optional: mirror mount modification available (no backplates)  
 Photometric report and ies file available for download at [www.boydlighting.com](http://www.boydlighting.com)



**LAMPING**

**Fluorescent**

- One, F14WT5/Mini Bi-pin
- Voltage 120v or 277v (non-dimming)

Upcharges will apply for fluorescent remote dimming. Contact your local Boyd rep with the specification of the dimming control system being used.

Lamp not included with fixture.

**SPECIALTY FINISHES**

- Polished Nickel
- Satin Nickel

**OPTIONAL**

**Fluorescent Dimming**

- High Output: 24w
- Standard Output: 14w