



### Lamping Specifications

#### Incandescent:

- Type A-19, One, 150w max

#### Fluorescent: 120v or 277v

- 120v, One, GU-24, 26w max
- 277v, One, CFTR/GX24q, 26w max

## IMPORTANT | CAUTION

Read all instructions thoroughly, and turn off power at circuit breaker or fuse box before proceeding.

Step 1 Carefully remove fixture from packaging. Avoid using a sharp blade on packaging as doing so may result in damage to the finish on the fixture. Turn off power at breaker/fuse box.

Step 2 Assemble lamping assembly, stem, aligner adapter, canopy, and mounting hardware. Note that the aligner adapter threading should be on top.

Step 3 Attach assembly to J-box and attach wires using mounting hardware and wirenuts provided.

Step 4 Secure canopy against ceiling with aligner adapter.

Step 5 Attach diffuser assembly to lamping assembly with thumb screws.

Step 6 Install proper lamping according to relamp label, and attach bottom diffuser with diffuser knob.

Step 7 Restore power at the breaker/fuse box.

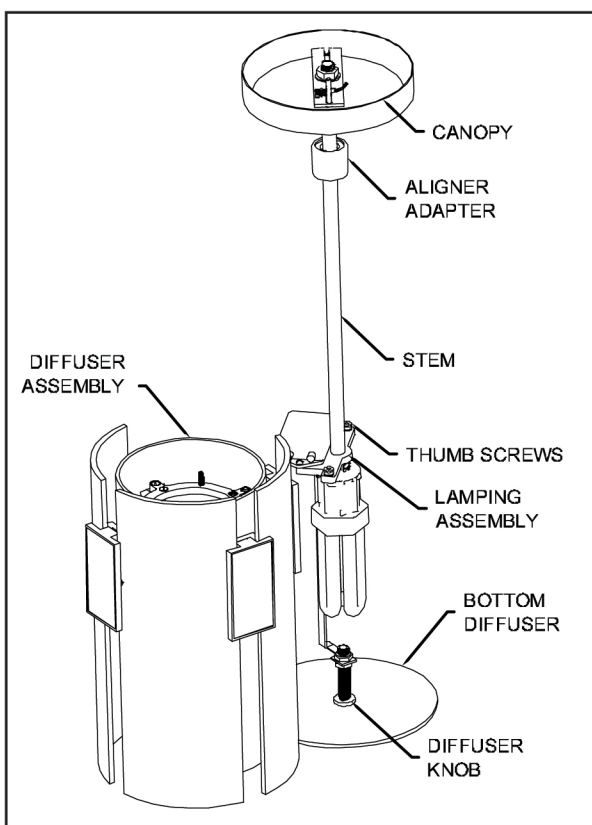


Figure 1

Thank you for your purchase and enjoy your Boyd lighting fixture.