

**Instructions for Installation:**  
C-10393 Glow Sconce

**Lamping Specifications:**  
LED

**IMPORTANT! AT ALL TIMES WIRING TO BE DONE PER NATIONAL ELECTRIC CODES (NEC) OR APPLICABLE LOCAL CODES**

**IMPORTANT | CAUTION  
READ ALL INSTRUCTIONS THOROUGHLY.  
TURN OFF POWER AT CIRCUIT BREAKER OR  
FUSE BOX BEFORE PROCEEDING.**



Figure 1

**WARNING:** Glass is installed in this fixture prior to installation, causing fixture to be heavy, and may require two people for proper installation.

**Step 1** Remove fixture from packaging. Avoid using a sharp blade on the packaging, as doing so may result in damage to the finish of the fixture.

**Step 2** Turn off power to J-box.

**Step 3** Remove button head screws that retain the universal mounting plate into fixture (Figure 1) and separate ends of luminaire disconnect. (Figure 2)



Figure 2

**Step 4** Locate fixture mounting plate and make wire connections using supplied twist-on connectors, attach the white fixture wire to the neutral supply wire (typically white), and the black fixture wire to the hot supply wire (typically black). Connect the fixture ground wire to the ground supply wire or the ground screw in the outlet box. (Figure 3) Push wires and wire connections into J-box.

**Step 5** Install mounting plate to J-box using mounting screws provided. (Figure 4)

**Step 6** Loosen set screw on back of fixture to allow glass to drop into place without hitting screw. (Figure 5)

**Step 7** Place frosted glass plate into fixture. (Figure 6)

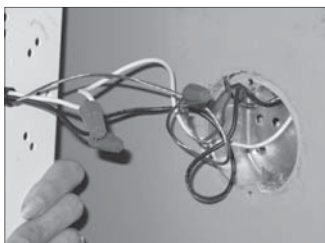


Figure 3



Figure 4

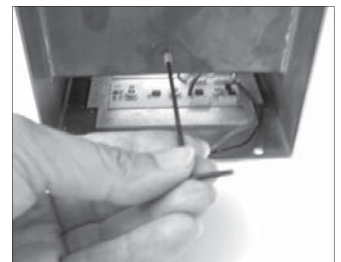


Figure 5



Figure 6

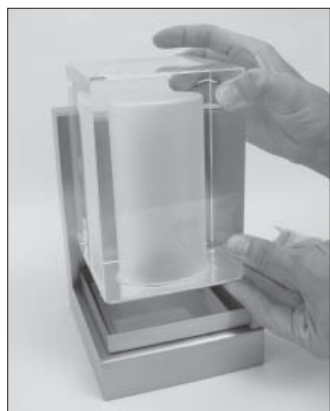


Figure 7

Step 8 Set crystal block onto glass plate. Tighten set screw at the back of fixture. (Figure 7-8)

Step 9 Reconnect ends of luminaire disconnect. Ensure disconnect is not situated between driver and housing and does not interfere with fixture installation. (Figure 9)

Step 10 Lower back of fixture over holes in mounting plate. (Figure 10)

Step 11 Reinstall button head screws to secure fixture to mounting plate. (Figure 11)

Step 12 Restore power to the circuit and illuminate lamp. (Figure 12)



Figure 10



Figure 8



Figure 11



Figure 9



Figure 12

Thank you for your purchase and enjoy your Boyd lighting product!