


## INSTALLATION INSTRUCTIONS

### C-10681 Scorpio Sconce

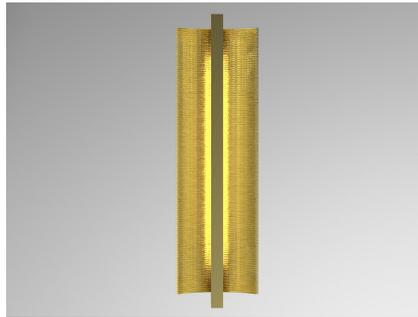

#### IMPORTANT!

AT ALL TIMES WIRING TO BE DONE PER NATIONAL ELECTRICAL CODES (NEC) OR APPLICABLE LOCAL CODES. READ ALL INSTRUCTIONS THOROUGHLY. TURN OFF POWER AT CIRCUIT BREAKER OR FUSE BOX BEFORE PROCEEDING.

#### STEP 1

- Carefully remove fixture from packaging. Avoid using a sharp blade on the packaging, as doing so may result in damage to the fixture or finish.

#### STEP 2

- Remove mounting plate from fixture. (Figure 1)
- To do so, loosen set screws (shown in red) at ends of the backplate. There are four screws total.

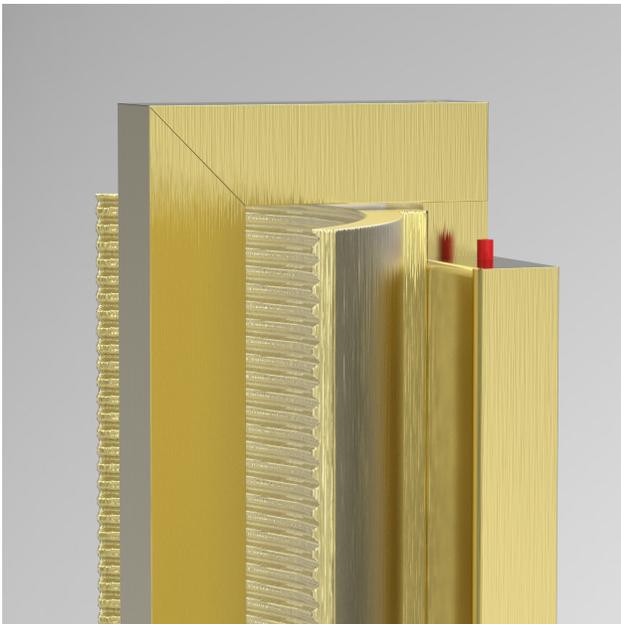


Figure 1



Figure 2

#### STEP 3

- Attach mounting plate to outlet box. Safety cable should be oriented at the top. (Figure 2)
- Use secondary anchors at top and bottom of mounting plate. Electrician should select anchors suitable for the wall surface, and the anchors shown in the illustration may differ from those used.

#### STEP 4

- Hang fixture from safety cable. (Figure 3)
- Hook should be inserted into bracket on upper back side of sconce.



Figure 3

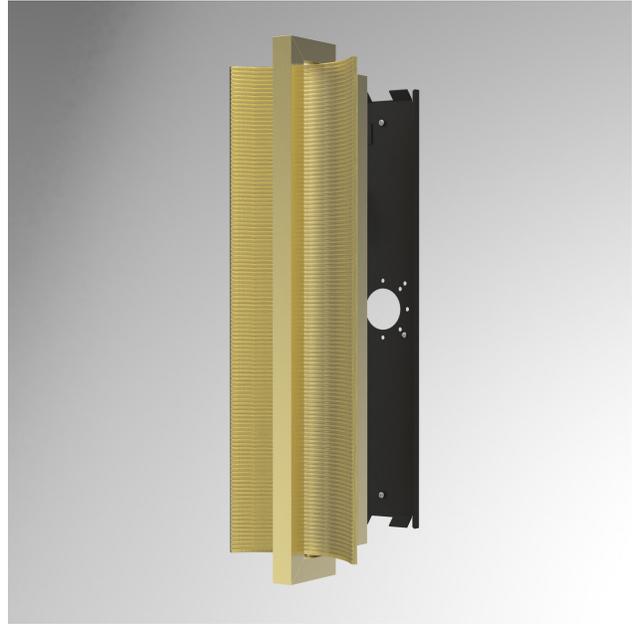


Figure 4

#### STEP 5

- Make wire connections using twist-on connectors.
- Connect the white fixture lead to the neutral supply wire (typically white).
- Connect the black fixture lead to the hot supply wire (typically black).
- Connect the copper fixture wire to the ground wire or ground terminal in the outlet box.
- If installing on a 0-10V dimming system, connect the purple fixture lead to the purple supply wire.
- Connect the gray fixture lead to the gray supply wire.
- If dimming is not required, cap off the purple and gray leads separately.
- Push all connections inside the outlet box.

#### STEP 6

- With fixture wired, carefully align fixture over mounting plate. (Figure 4)
- Re-tighten the set screws (shown in Figure 1) at the top and bottom of the backplate.
- Gently wiggle fixture to make sure fixture is securely mounted.