

INSTALLATION INSTRUCTIONS

DA2016 Isa Pendant

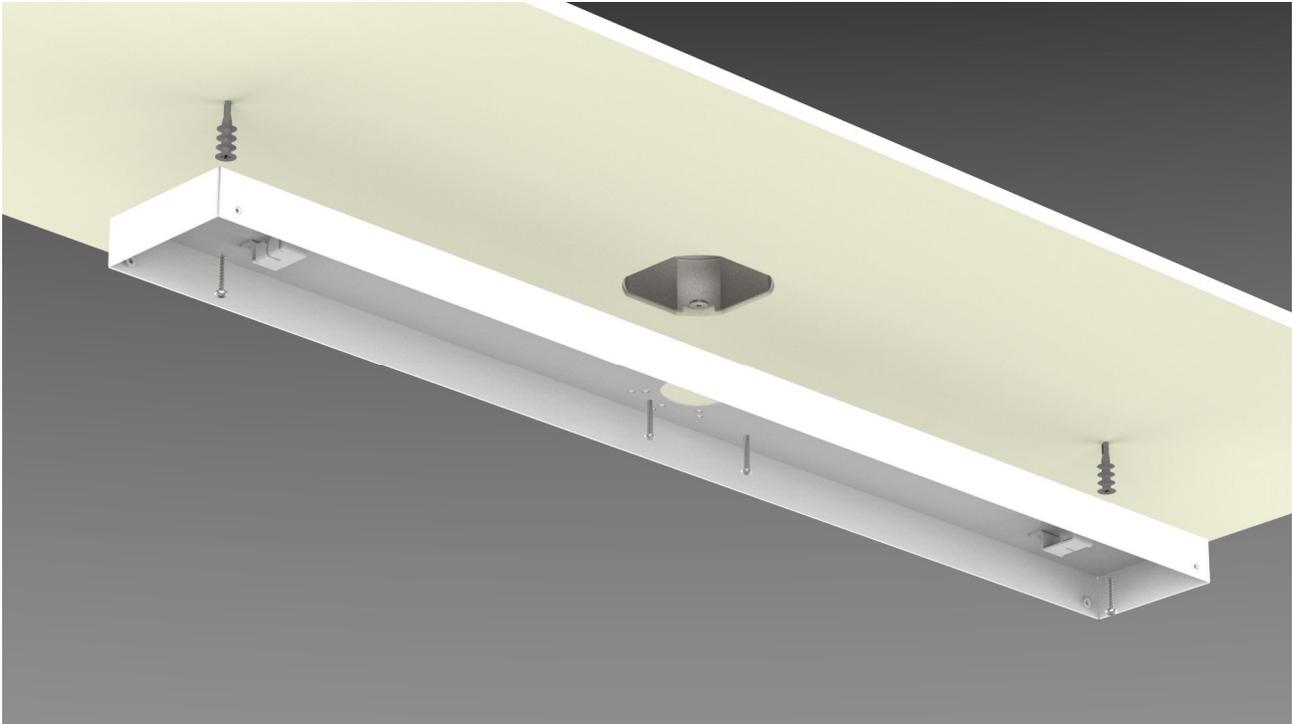
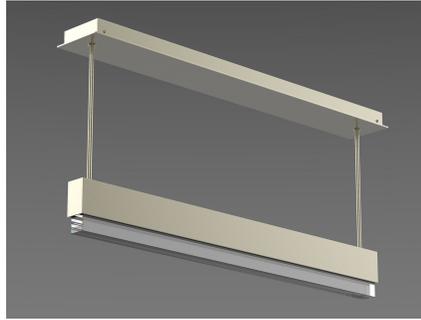


Figure 1

IMPORTANT!

AT ALL TIMES WIRING TO BE DONE PER NATIONAL ELECTRICAL CODES (NEC) OR APPLICABLE LOCAL CODES. READ ALL INSTRUCTIONS THOROUGHLY. TURN OFF POWER AT CIRCUIT BREAKER OR FUSE BOX BEFORE PROCEEDING.

STEP 1

- Carefully remove fixture from packaging. Avoid using a sharp blade on the packaging, as doing so may result in damage to the fixture or finish. Glass shade is fragile so handle with care.

STEP 2

- Turn off power at fuse box or circuit breaker.

STEP 3

- Install mounting plate onto ceiling electrical box with screws provided. (Figure 1)
- Due to length and weight of fixture, secondary anchors should be used on the ends, independent of the electrical box. Electrician should use anchors appropriate for the load and specific ceiling type, and may not match anchors shown in illustration.

STEP 4

- Secure stems to housing cover. (Figure 2)
- Feed LED wires through nut and lockwasher, then through hole in housing cover.
- Secure nut to bottom end of stem. Note collar on stem. (Figures 2/3)
- Repeat process on second stem at opposite end. Stem will not have wiring.

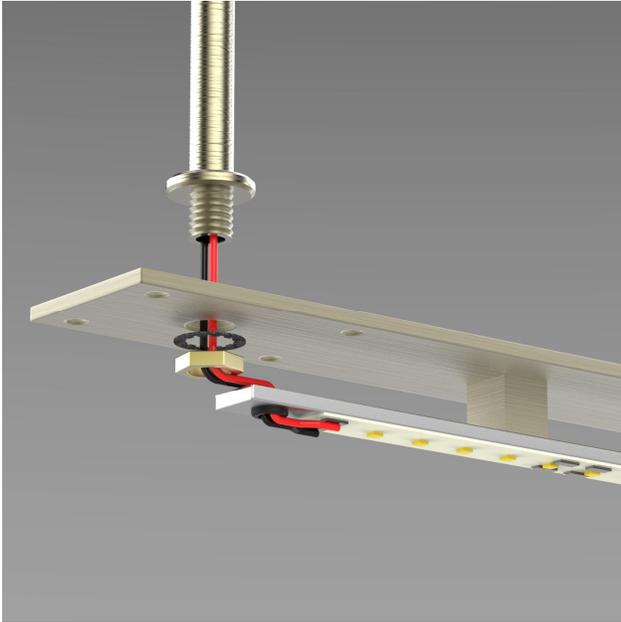


Figure 2



Figure 3

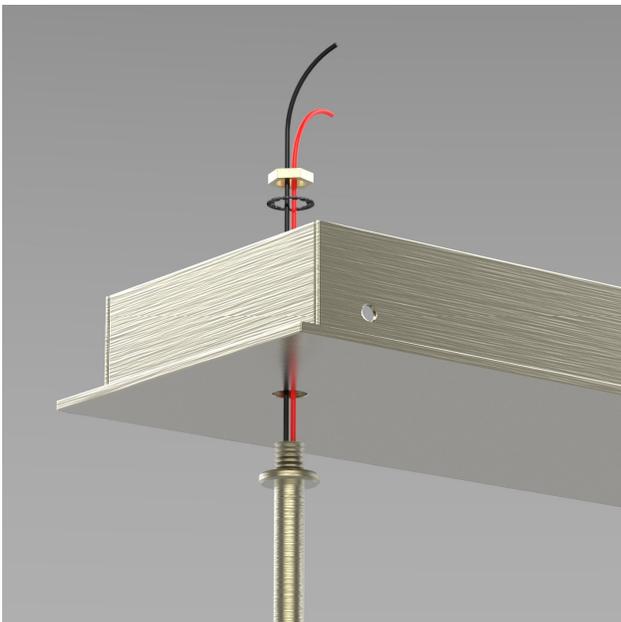


Figure 4

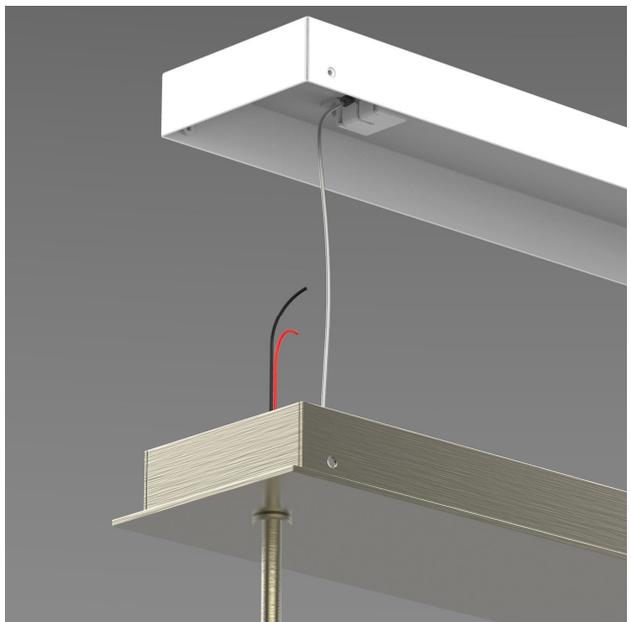


Figure 5

STEP 5

- Attach canopy to top of stems. (Figure 4)
- Feed wires from first stem through hole in canopy. Secure to stem with nut and lockwasher.
- Be sure LED driver within canopy is located on same end as stem wiring. (Figure 9)
- Secure second stem to canopy with nut and lockwasher.

STEP 6

- Hook canopy support cables onto mounting plate. (Figure 5)
- Feed barrel-end of cable into gap at top of support bracket. (Figure 6)
- Pull cable through slot. (Figure 7)
- Repeat process for cable at opposite end of fixture.



Figure 6

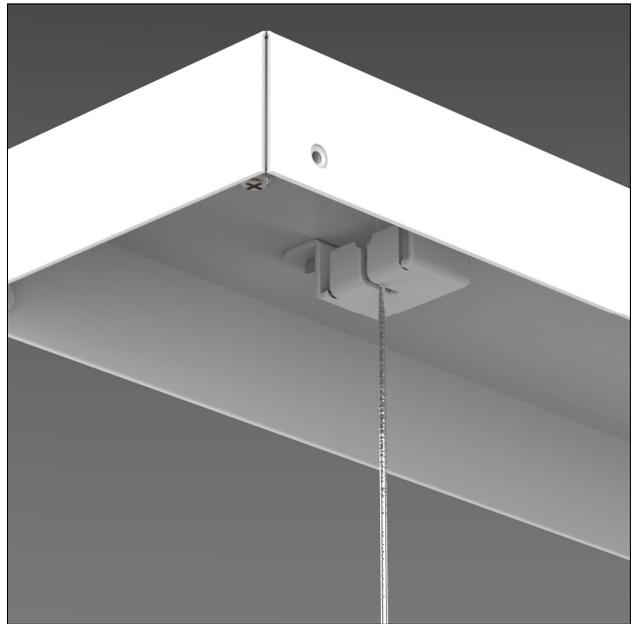


Figure 7

STEP 7

- Allow fixture to freely hang from support cables. (Figure 8)

STEP 8

- Make LED wire connections. (Figure 9)
- Using provided connectors, connect RED (+) LED lead to red (+) driver wire.
- Connect BLACK (-) LED lead to blue or black (-) driver wire. (shown in blue)
- Tuck wires into canopy.

STEP 9

- Make main wire connections using included orange twist-on connectors. (Figure 10)
- Connect the white fixture lead to the neutral supply wire (typically white).
- Connect the black fixture lead to the hot supply wire (typically black).
- Connect the copper fixture wire to the ground wire or ground terminal in the outlet box.
- If installing on a 0-10V dimming system, connect the purple fixture wire to the purple supply wire.
- Connect the gray fixture wire to the gray supply wire.
- If dimming is not required, cap purple and gray wires separately.
- Push all connections inside the outlet box.



Figure 8

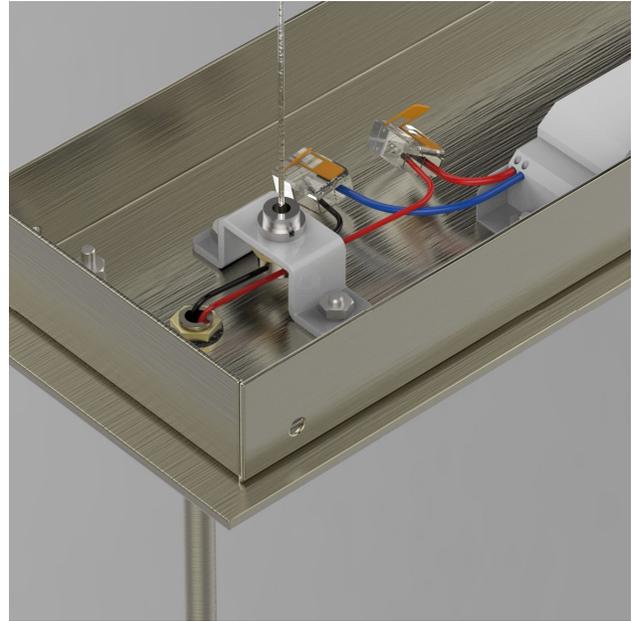


Figure 9

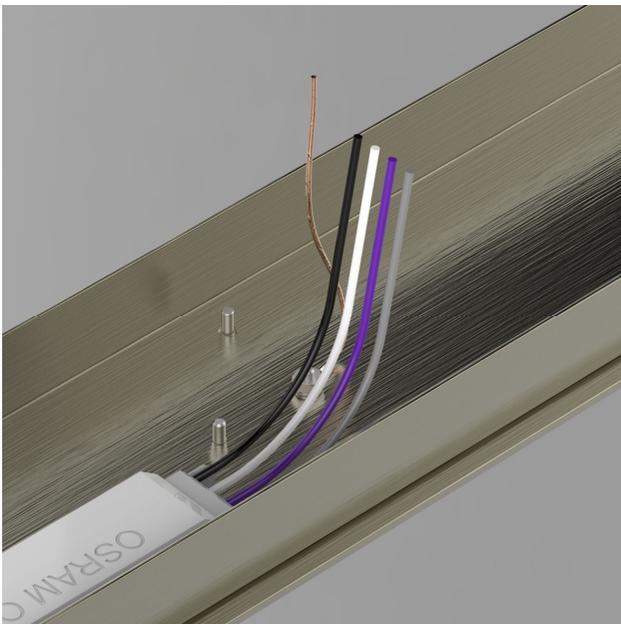


Figure 10

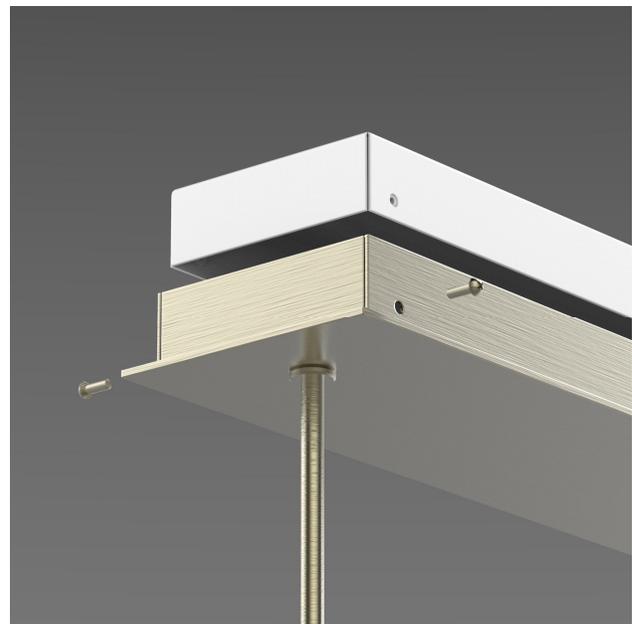


Figure 11

STEP 10

- With assistance from a second person, carefully lift canopy over mounting bracket. (Figure 11)
- Be sure no wires or cables are kinked or caught between canopy and mounting bracket.
- With a screwdriver, insert brass screws into all four corners.

STEP 11

- Restore power to circuit to test functionality of fixture.
- If fixture lights properly, turn power back off.
- If fixture does not function properly, check all connections and repeat process.

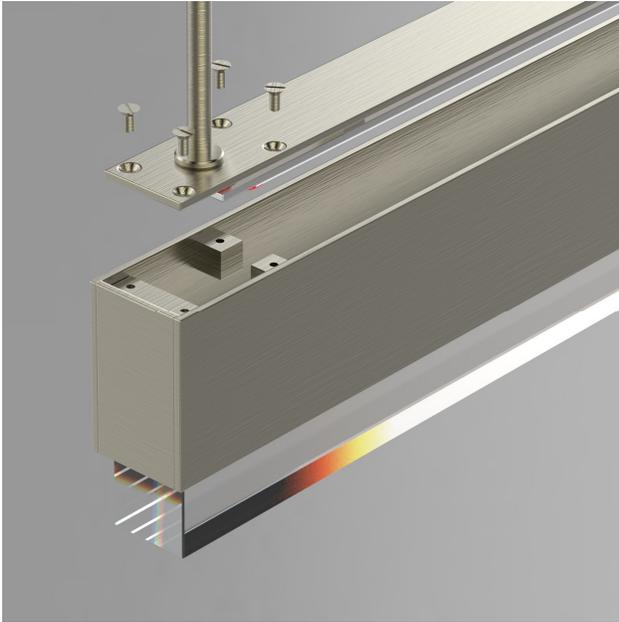


Figure 12

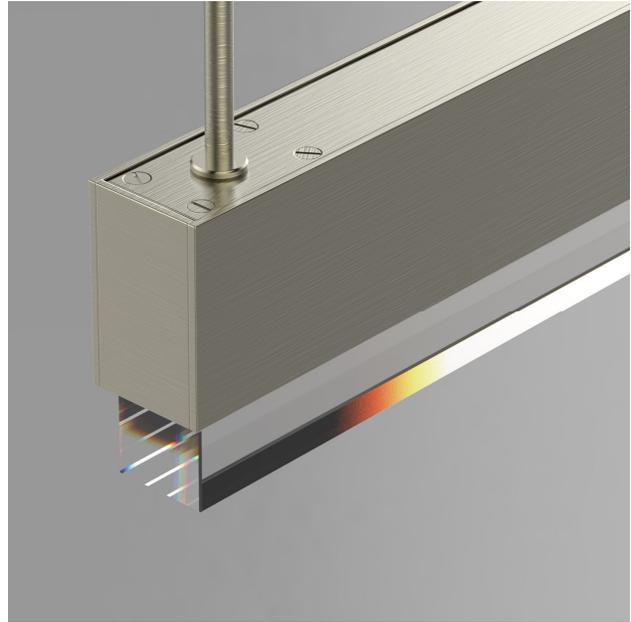


Figure 13

STEP 12

- With assistance from a second person, attach housing assembly to housing cover. (Figure 12)
- Secure with four screws on both ends as shown (Figure 13)

