

Installation Instructions

10216 CATACAOS 24"

10217 CATACAOS 30"



Lamping Specifications

Incandescent:

Medium Base, Four A-19, 100w max,

Fluorescent: Non-Dimming 120v-277v

Four, CFTR26W/Gx24q or Four, CFTR32W/Gx24q or CFTR42W/Gx24q

Dimming 120v or 277v,

Four, CFTR32W/Gx24q or CFTR42W/Gx24q or Four, CFTR26W/G24q-3 or CFQ26W/G24q-3

Step 1 Remove the fixture from packaging. Avoid using a sharp blade on the packaging, doing so may result in damage to the finish or linen shade.

CAUTION: Injury to persons and damage to property may result if the fixture or mounting hardware is pulled from the ceiling. Mount only on a surface that is mechanically sound and one that can easily support 30 lbs. Minimum.

Step 2 Locate the lamp assembly and upper stem assembly and canopy. Route the power wires from the lamp assembly up through stem. Carefully thread the upper stem into the threaded coupling of the lower lamp assembly. Be careful not to damage the insulation of the wires during assembly. (See Figure 1)

Step 3 Locate the outlet box and with power off at circuit, insert the threaded studs (provided) into outlet box mounting holes. Adjust stud length so that it protrudes through the universal mounting bracket on the lamp cluster assembly and lock into position with cinch nuts. (See Figure 2)

Step 4 Loosen and lower the canopy retainer ring and carefully lower the canopy down the upper stem to expose the mounting hardware. Carefully lift the lamp cluster and stem assembly up to the outlet box and make wire connections. Connect the white fixture wire to the neutral supply wire; typically white. Connect the black fixture wire to the hot supply wire; typically black. Connect the fixture ground wire to the ground supply wire; typically copper or green.

Step 5 Carefully push the wire connections inside the outlet box, raise the lamp assembly and align the universal mounting bracket into position over the outlet box. Install the two thumb knobs and secure the bracket to the ceiling. Raise the canopy into position over the outlet box. Fasten the retainer ring to secure the canopy to the ceiling. (See Fig 2)

Step 6 Install lamps per label recommendations. Raise the shade and decorative grill assembly into position and align the four support brackets on the inside of the shade with the crossbar brackets on the lamp assembly module. Use hardware to secure the shade onto the support brackets. (See Fig 3)

Step 7 Restore power at the breaker / fuse box.

IMPORTANT | CAUTION
Read all instructions thoroughly, and turn off power at circuit breaker before proceeding.
IMPORTANT! AT ALL TIMES WIRING TO BE DONE PER NATIONAL ELECTRIC CODES (NEC) OR APPLICABLE LOCAL CODES.

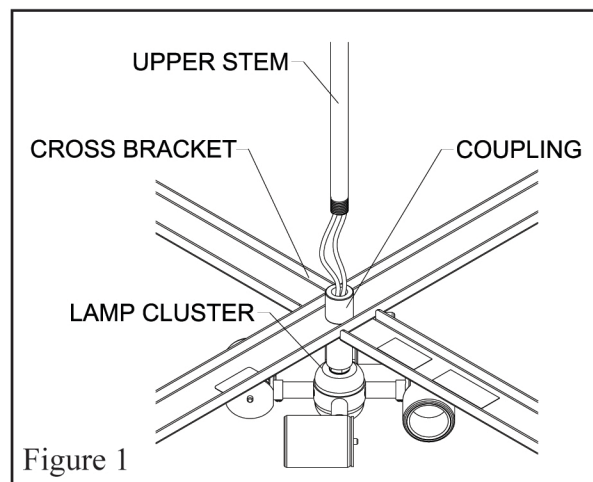


Figure 1

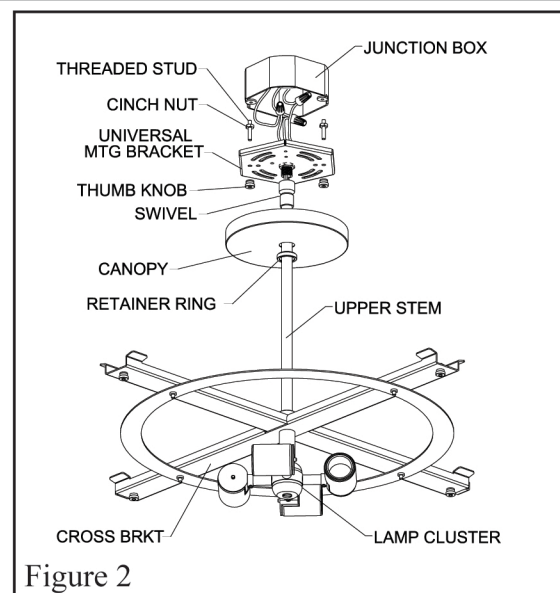


Figure 2

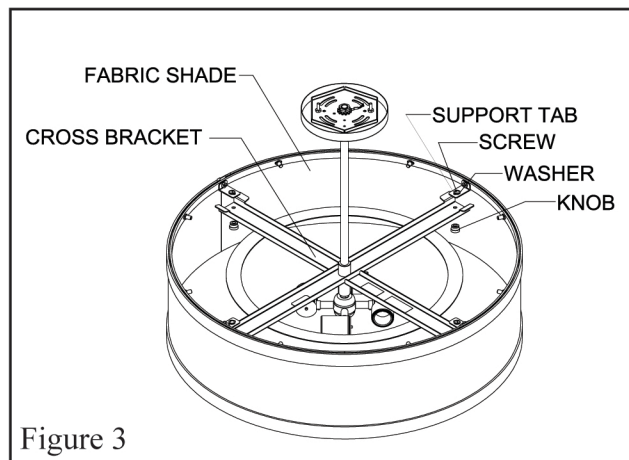


Figure 3

Thank you for your purchase and enjoy your Boyd lighting fixture.