




Installation Instructions

Revised 10/31/08



K0091 Lavalier I Wall
K0092 Lavalier II Wall

Lamping Specifications:

- K-0091 Lavalier I Wall Bracket
120 or 277 volt, One, MR-16, 35w, One MR-8, 20w
- K-0092 Lavalier II Wall Bracket
120 or 277 volt, Two, MR-16, 35w each, One MR-8, 20w
Bi-Pin Halogen lamps, 12 volt integral transformer

IMPORTANT | CAUTION
Read all instructions thoroughly,
and turn off power at circuit breaker
or fuse box before proceeding.

**IMPORTANT! AT ALL TIMES WIRING TO
BE DONE PER NATIONAL ELECTRIC CODES
(NEC) OR APPLICABLE LOCAL CODES.**

IMPORTANT | CAUTION
Read all instructions thoroughly, and turn off
power at circuit breaker or fuse box before pro-
ceeding.

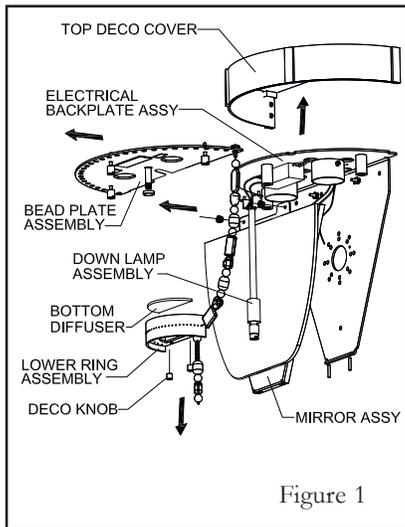


Figure 1

Step 1 Remove fixture and all fixture components from packaging. Remove the top deco cover, bead assembly, downlamp and mirror assembly from backplate and carefully set aside.

Step 2 Locate outlet box and temporarily mount fixture backplate assembly to the outlet box. With bracket mounted, mark the holes to be used for additional mounting support. Remove mounting bracket and install additional wall anchors or similar hardware. (See Figure 2)

IMPORTANT: Do Not Rely on the outlet box for sole mounting as it is not adequate to support the weight of the fixture. Fixture must be mounted to a structural member such as a wall stud or similar component with adequate hardware that can support a minimum weight of 30 lbs.

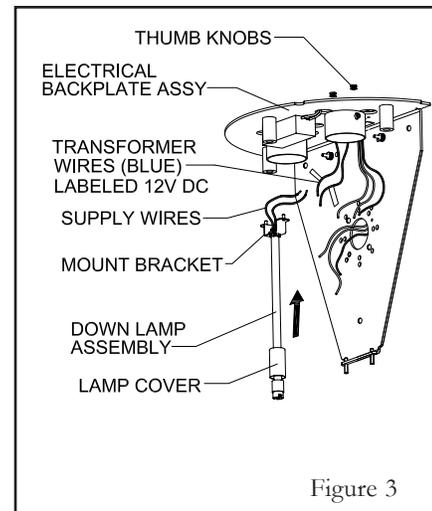


Figure 3

Step 3 Install the backplate assembly onto the wall and over the outlet box. Route the wires through the center of the backplate. Next install the downlamp stem assembly to the upper portion of the backplate and secure into place with thumb knobs. (See Figure 3)

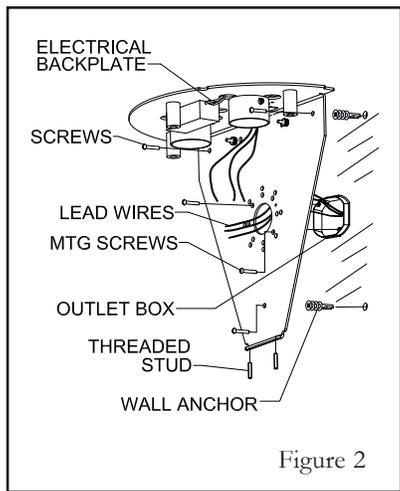


Figure 2

Step 4 Use connectors and attach the blue low voltage transformer power leads, labeled 12 volts DC, to the downlamp wires. Next connect the primary leads from the outlet box. Connect the black fixture wire to the hot supply wire (typically black); connect the white fixture wire to the neutral supply wire (typically white); connect the copper fixture wire to the ground wire or ground terminal at the outlet box. Push field wiring connections into the junction box. (See Figure 3)

Step 5 Install the mirror bracket assembly. Orient the mirror assembly behind the downlamp stem and raise towards the mounting studs. Align the lower bracket over the bottom studs and lift into position, carefully route and conceal the wires behind the mirror assembly. Secure the mirror assembly into position with thumb screws. (See Figure 4)

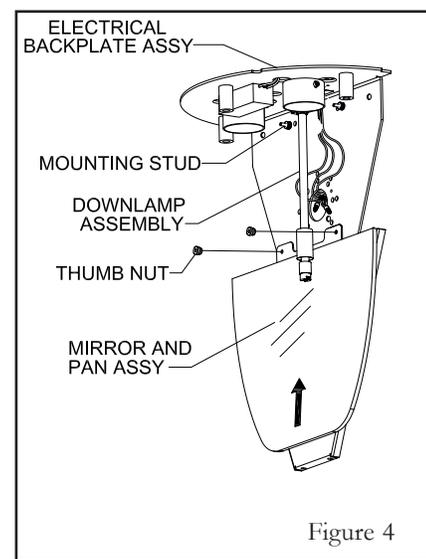


Figure 4

Thank you for your purchase and enjoy your Kentfield Collection fixture.

K0091 Lavalier I Wall
 K0092 Lavalier II Wall

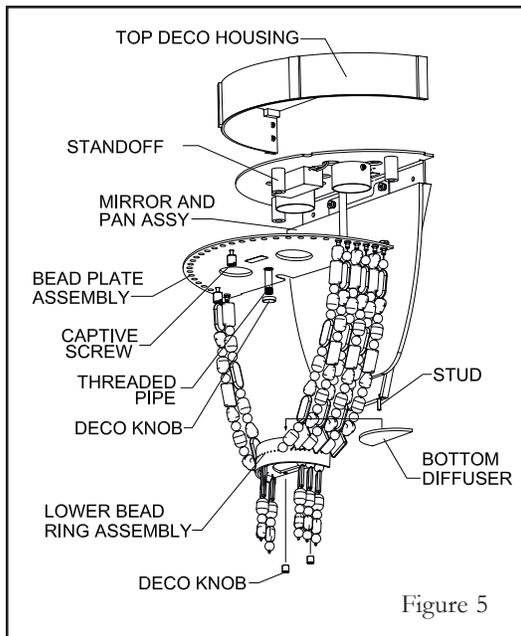


Figure 5

Step 6 Install the decorative bead assembly onto the backplate. Handle the stranded beads with care as they are easily damage and can become tangled. Align the upper bead plate with the three standoffs and secure into position with the captive screws. (See Figure 5)

Step 7 Install bottom diffuser into the upper portion of the lower bead assembly ring. Slide the glass diffuser beneath the retainer tabs. Align the lower ring assembly over studs and secure into position with decorative knobs. (See Figure 5)

Step 8 Install lamps per relamp label recommendations, there will be MR-16 lamps in the upper cluster and one MR-8 in the downlamp assembly. (See Figure 6)

Step 9 Install the top deco housing by aligning the cover over the electrical assy and lowering into position. Carefully reach through the bead strands and align the steel nipple through the center of the electrical assembly plate and secure into position with decorative knob. (See Figure 5)

Step 10 Restore power to the circuit and illuminate the fixture.

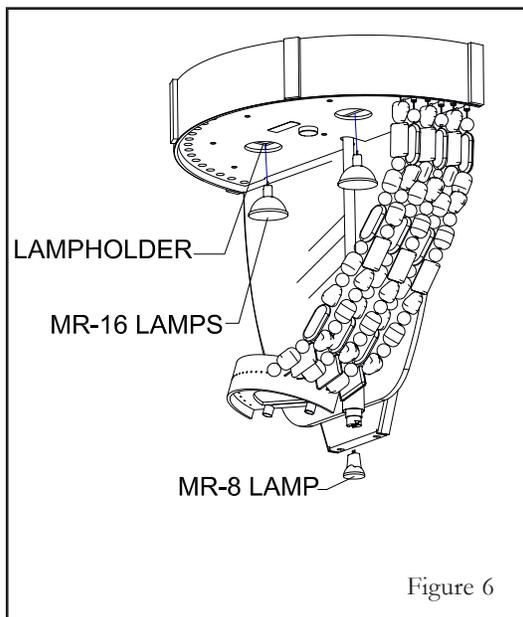


Figure 6