

NEW PRODUCTS CATALOG

boyd

LUCIA SCONCE
LUCIAS ARTLIGHT
QUADRANT SCONCE
BLADE PENDANT
LILY SCONCE

LILY PENDANT 5

LILY PENDANT 9

SPIRE LEAF PENDANT 3

SPIRE LEAF PENDANT 9

CALLISTO LINEAR

CALLISTO PENDANT

OVALO SINGLE PENDANT

OVALO DOUBLE PENDANT

OVALO CHAIN CLUSTER

ECLIPSE MIRROR

VOLTERRA MIRROR

LOOP SINGLE SCONCE

LOOP DOUBLE SCONCE

LOOP PENDANT

AXIS SCONCE

SCORPIO SCONCE

BRANCH SCONCE


GLOBE PENDANT

PARISIAN PENDANT

NEW PRODUCTS CATALOG

BOYD'S DESIGN VISION OF
THE LAST FIVE YEARS

CREATIVE DIRECTOR
SCHUYLER SWEET

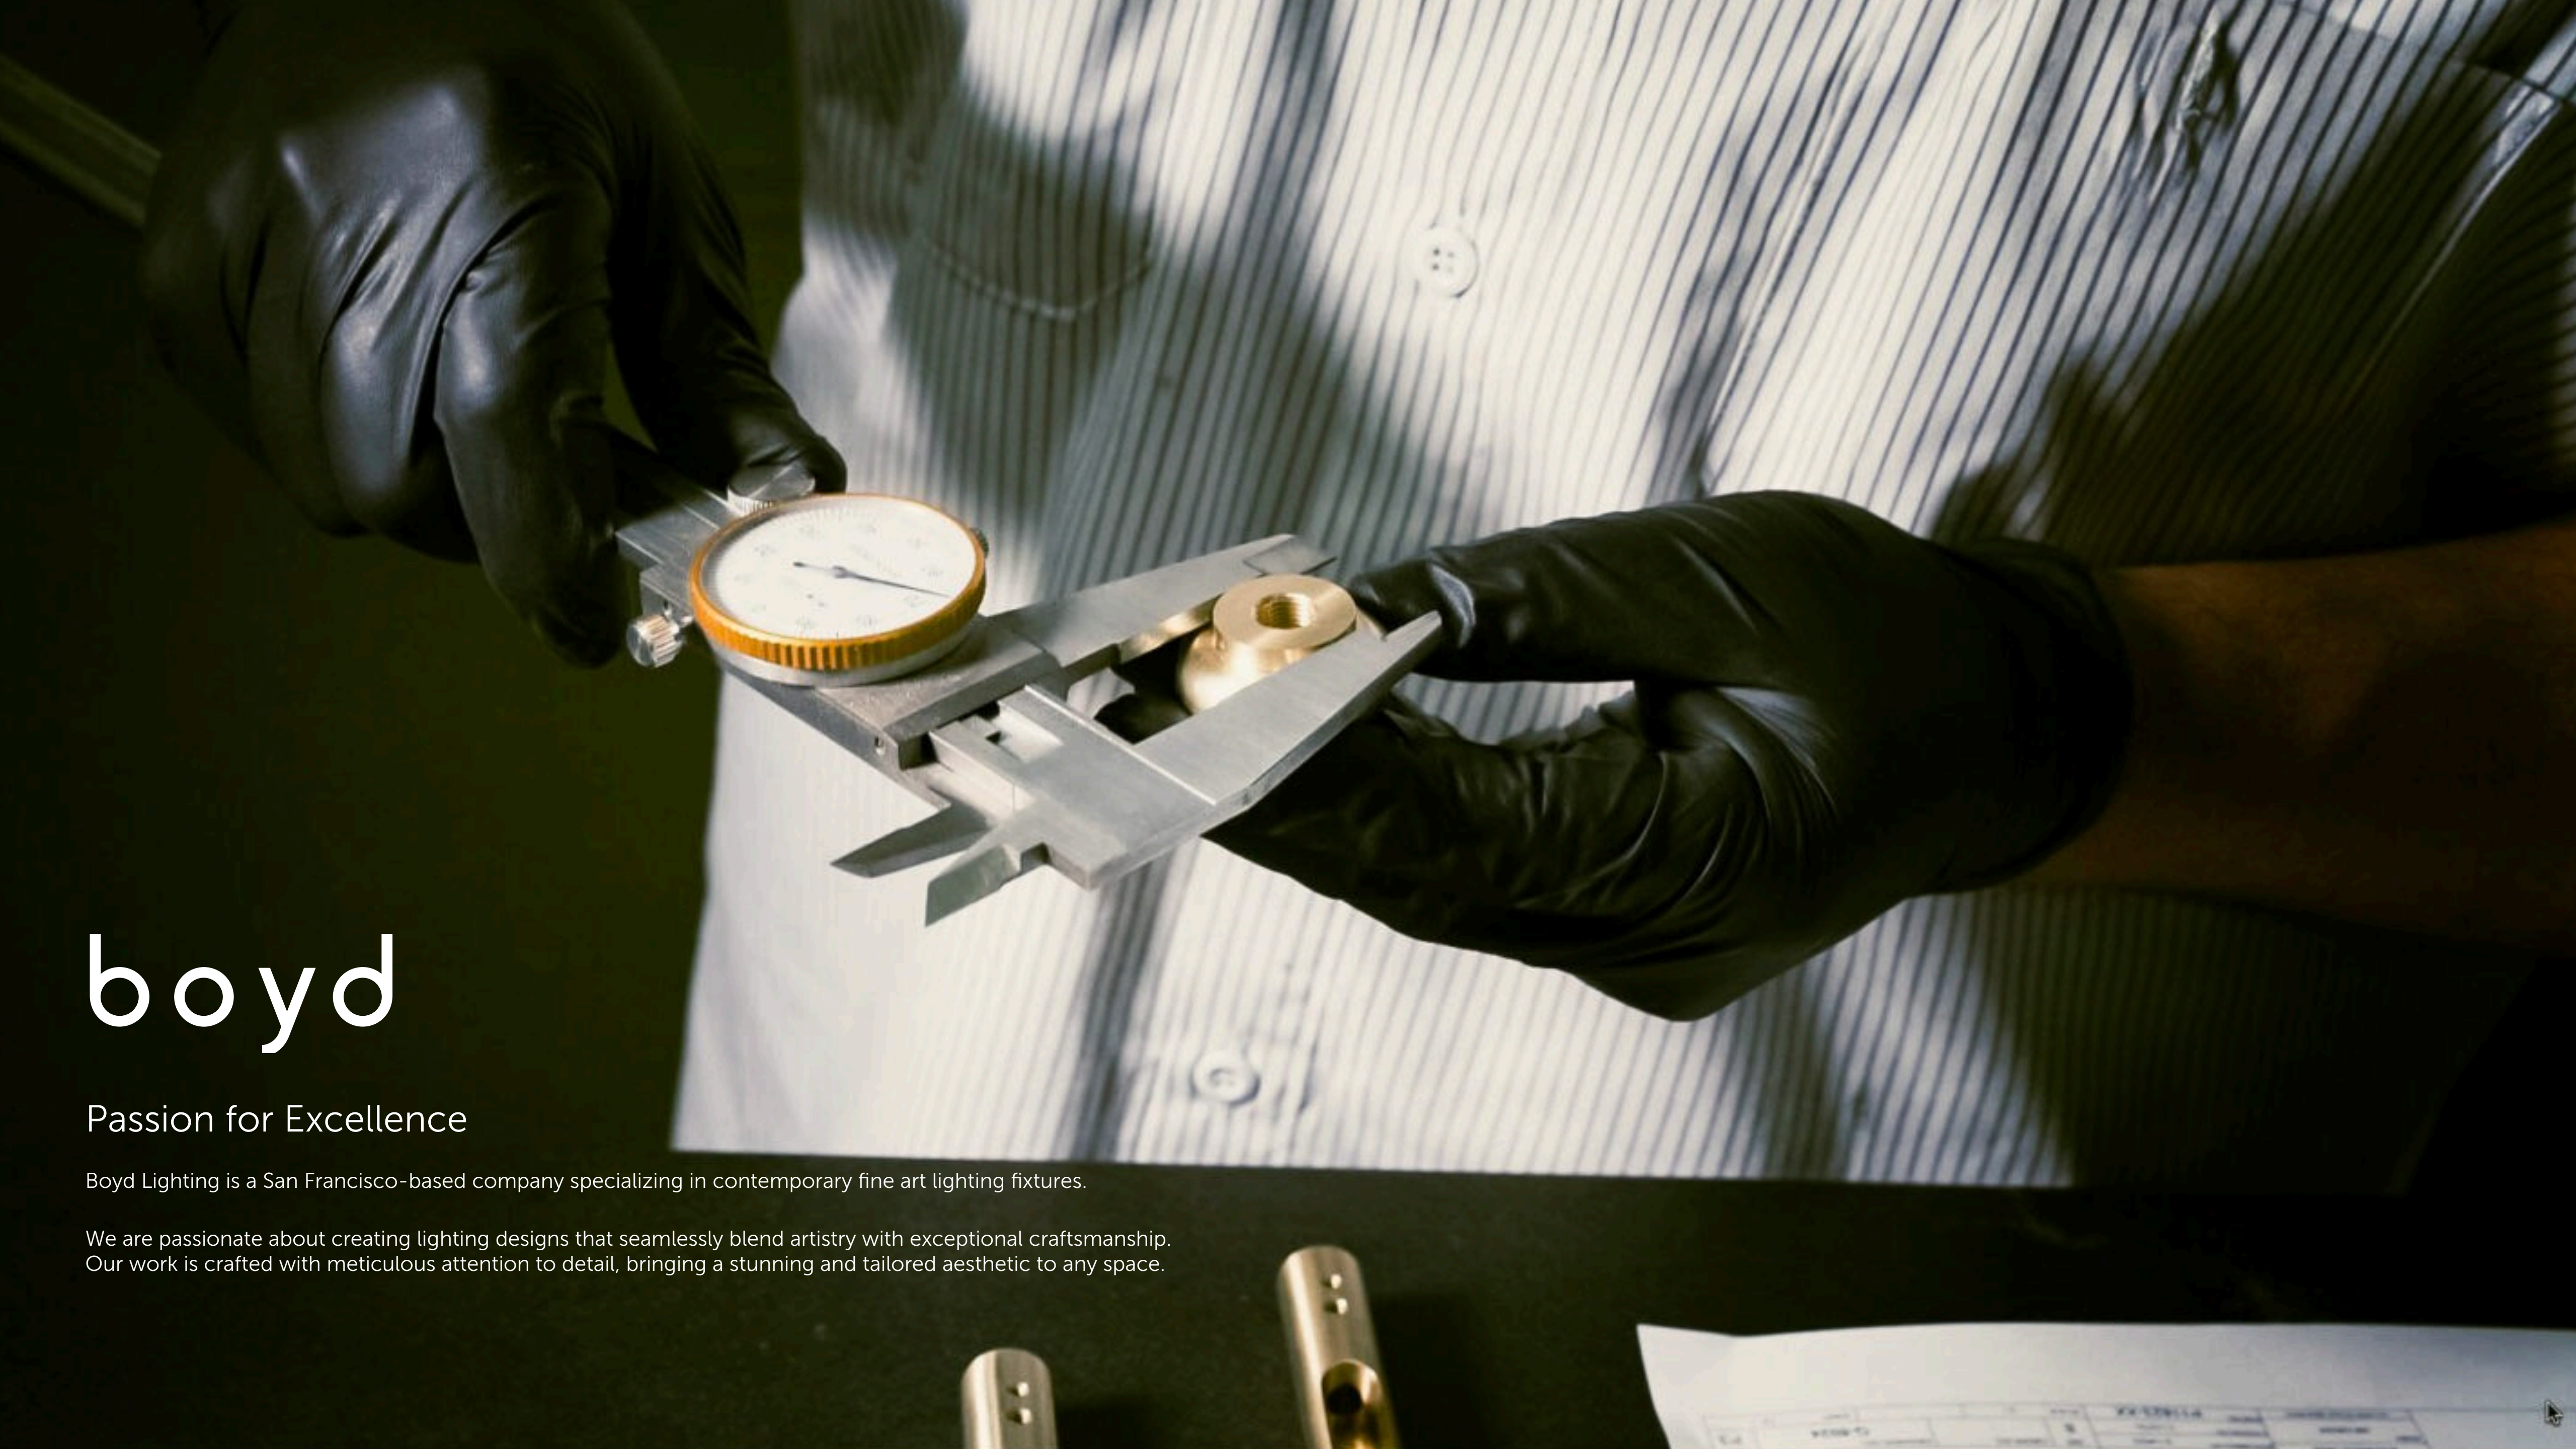


boyd

Passion for Excellence

Boyd Lighting is a San Francisco-based company specializing in contemporary fine art lighting fixtures.

We are passionate about creating lighting designs that seamlessly blend artistry with exceptional craftsmanship. Our work is crafted with meticulous attention to detail, bringing a stunning and tailored aesthetic to any space.

10886-10879 Lucia Sconce

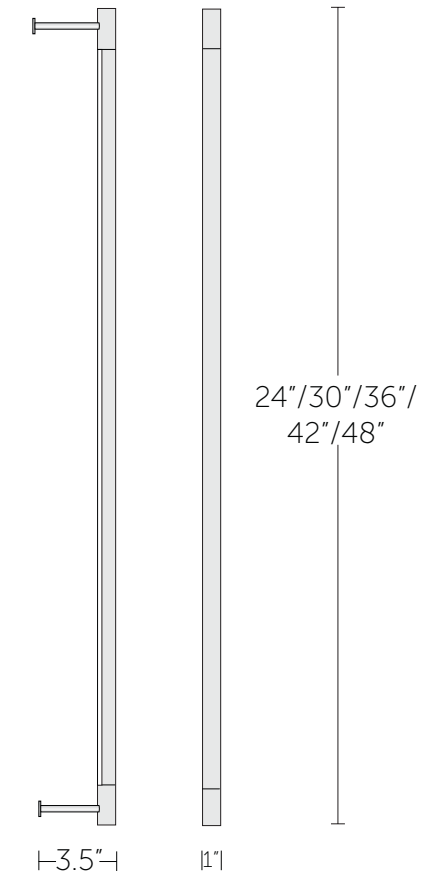

LAMPING

10876 LED

11 total watts, Standard 3000K/98+ CRI
~825 Fixture Lumens Universal 120-277V.
W 1" x L 24" x Projection 3.5"
(25mm x 610mm x 90mm)

7 lbs
3.2 kg

10876 LED

14 total watts, Standard 3000K/98+ CRI
~1100 Fixture Lumens Universal 120-277V.
W 1" x L 30" x Projection 3.5"
(25mm x 762mm x 90mm)

8 lbs
3.6 kg

10877 LED

16 total watts, Standard 3000K/98+ CRI
~1250 Fixture Lumens Universal 120-277V.
W 1" x L 36" x Projection 3.5"
(25mm x 914mm x 90mm)

9 lbs
4 kg

10878 LED

20 total watts, Standard 3000K/98+ CRI
~1500 Fixture Lumens Universal 120-277V.
W 1" x L 42" x Projection 3.5"
(25mm x 1067mm x 90mm)

10 lbs
4.5 kg

10879 LED

27 total watts, Standard 3000K/98+ CRI
~2100 Fixture Lumens Universal 120-277V.
W 1" x L 48" x Projection 3.5"
(25mm x 1067mm x 90mm)

11 lbs
4.5 kg

NOTES

- UL listed (or equivalent) for damp locations.
- Backplates: 2"ø x 3/8" (51 x 10mm) or a 7/8"ø trim plate on premium mud style.
- 270 degree rotation
- The lamps standard in this fixture can be dimmed with 0-10V or forward-phase style dimmers.
- Driver must be mounted remotely.
- End Cap Style: Knurled or Smooth.

STANDARD FINISHES

- Earthen Bronze
- Blackened Bronze
- Satin Bronze

SPECIALTY FINISHES


- Satin Nickel

FOR MORE INFO

RETURN TO INDEX



10886-10879 Lucia Art Light

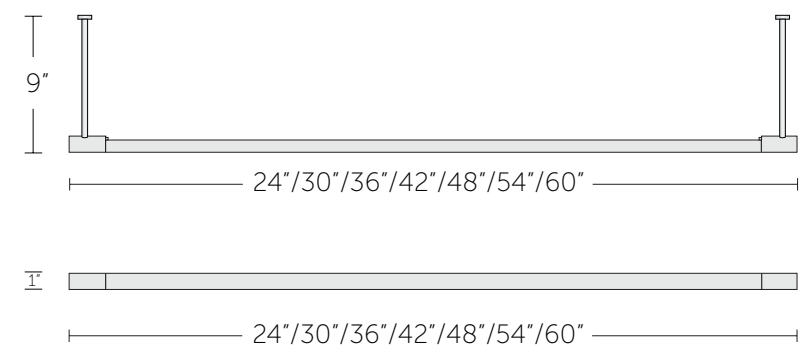

LAMPING / DIMENSIONS

10824 LED

12 total watts, Standard 3000K/98+ CRI
~1300 Fixture Lumens Universal 120-277V.
H 1" x L 24" x Projection 9" 7 lbs
(25mm x 610mm x 229mm) 3.2 kg

10825 LED

15 total watts, Standard 3000K/98+ CRI
~1600 Fixture Lumens Universal 120-277V.
H 1" x L 30" x Projection 9" 8 lbs
(25mm x 762mm x 229mm) 3.6 kg

10826 LED

19 total watts, Standard 3000K/98+ CRI
~2000 Fixture Lumens Universal 120-277V.
H 1" x L 36" x Projection 9" 9 lbs
(25mm x 914mm x 229mm) 4 kg

10827 LED

24 total watts, Standard 3000K/98+ CRI
~2550 Fixture Lumens Universal 120-277V.
H 2" x L 42" x Projection 9" 10 lbs
(25mm x 1067mm x 229mm) 4.5 kg

10828 LED

27 total watts, Standard 3000K/98+ CRI
~2900 Fixture Lumens Universal 120-277V.
H 1" x L 48" x Projection 9" 11 lbs
(25mm x 1219mm x 229mm) 5 kg

10829 LED

32 total watts, Standard 3000K/98+ CRI
~3400 Fixture Lumens Universal 120-277V.
H 1" x L 54" x Projection 9" 12lbs
(25mm x 1371mm x 229mm) 5.5kg

10830 LED

36 total watts, Standard 3000K/98+ CRI
~3800 Fixture Lumens Universal 120-277V.
H 1" x L 54" x Projection 9" 12lbs
(25mm x 1371mm x 229mm) 5.5kg

Notes

- UL listed (or equivalent) for damp locations.
- Backplates: 2"ø x 3/8" (51 x 10mm) or a 7/8"ø trim plate on premium mud style.
- Wire Exit Location: left end or right end.
- The lamps standard in this fixture can be dimmed with ELV or MLV style dimmers
- Driver must be mounted remotely.
- End Cap Style: Knurled or Smooth.

STANDARD FINISHES

- Earthen Bronze
- Blackened Bronze
- Satin Bronze

SPECIALTY FINISHES


- Satin Nickel

FOR MORE INFO

RETURN TO INDEX



10886 Quadrant Sconce

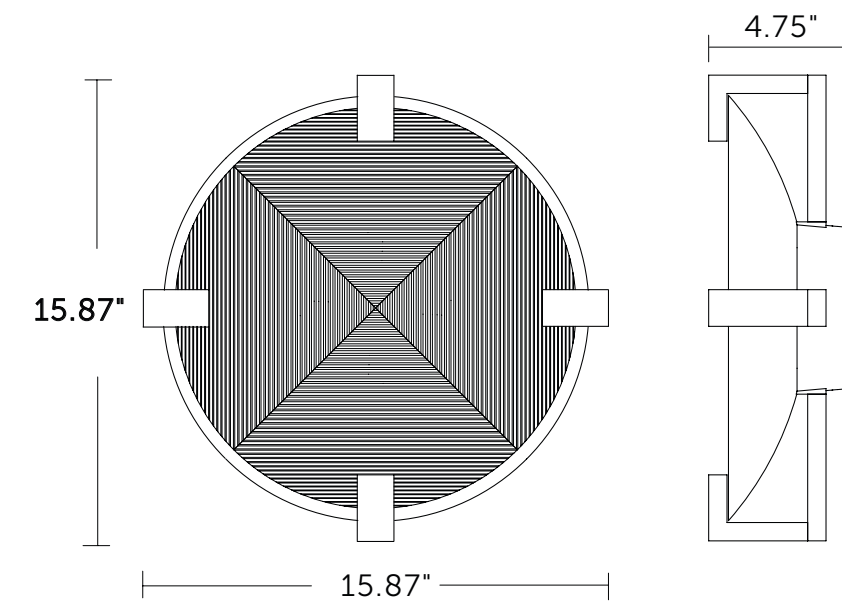

LAMPING

LED

- 11 watts
- 2700 K, 90+ CRI
- Universal 120-277 V
- ~ 600 Fixture Lumens
- Lamps included with fixture

3000°k color temperature is available.

The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10V low- voltage dimming controls and wiring.

UL listed (or equivalent) for damp locations

Backplate is cast and may exhibit slight imperfections, consistent with the casting process.

STANDARD FINISHES


- Antiqued Bronzes
- Blackened Bronze

SPECIALTY FINISHES


- Satin Nickel

[FOR MORE INFO](#)

[RETURN TO INDEX](#)

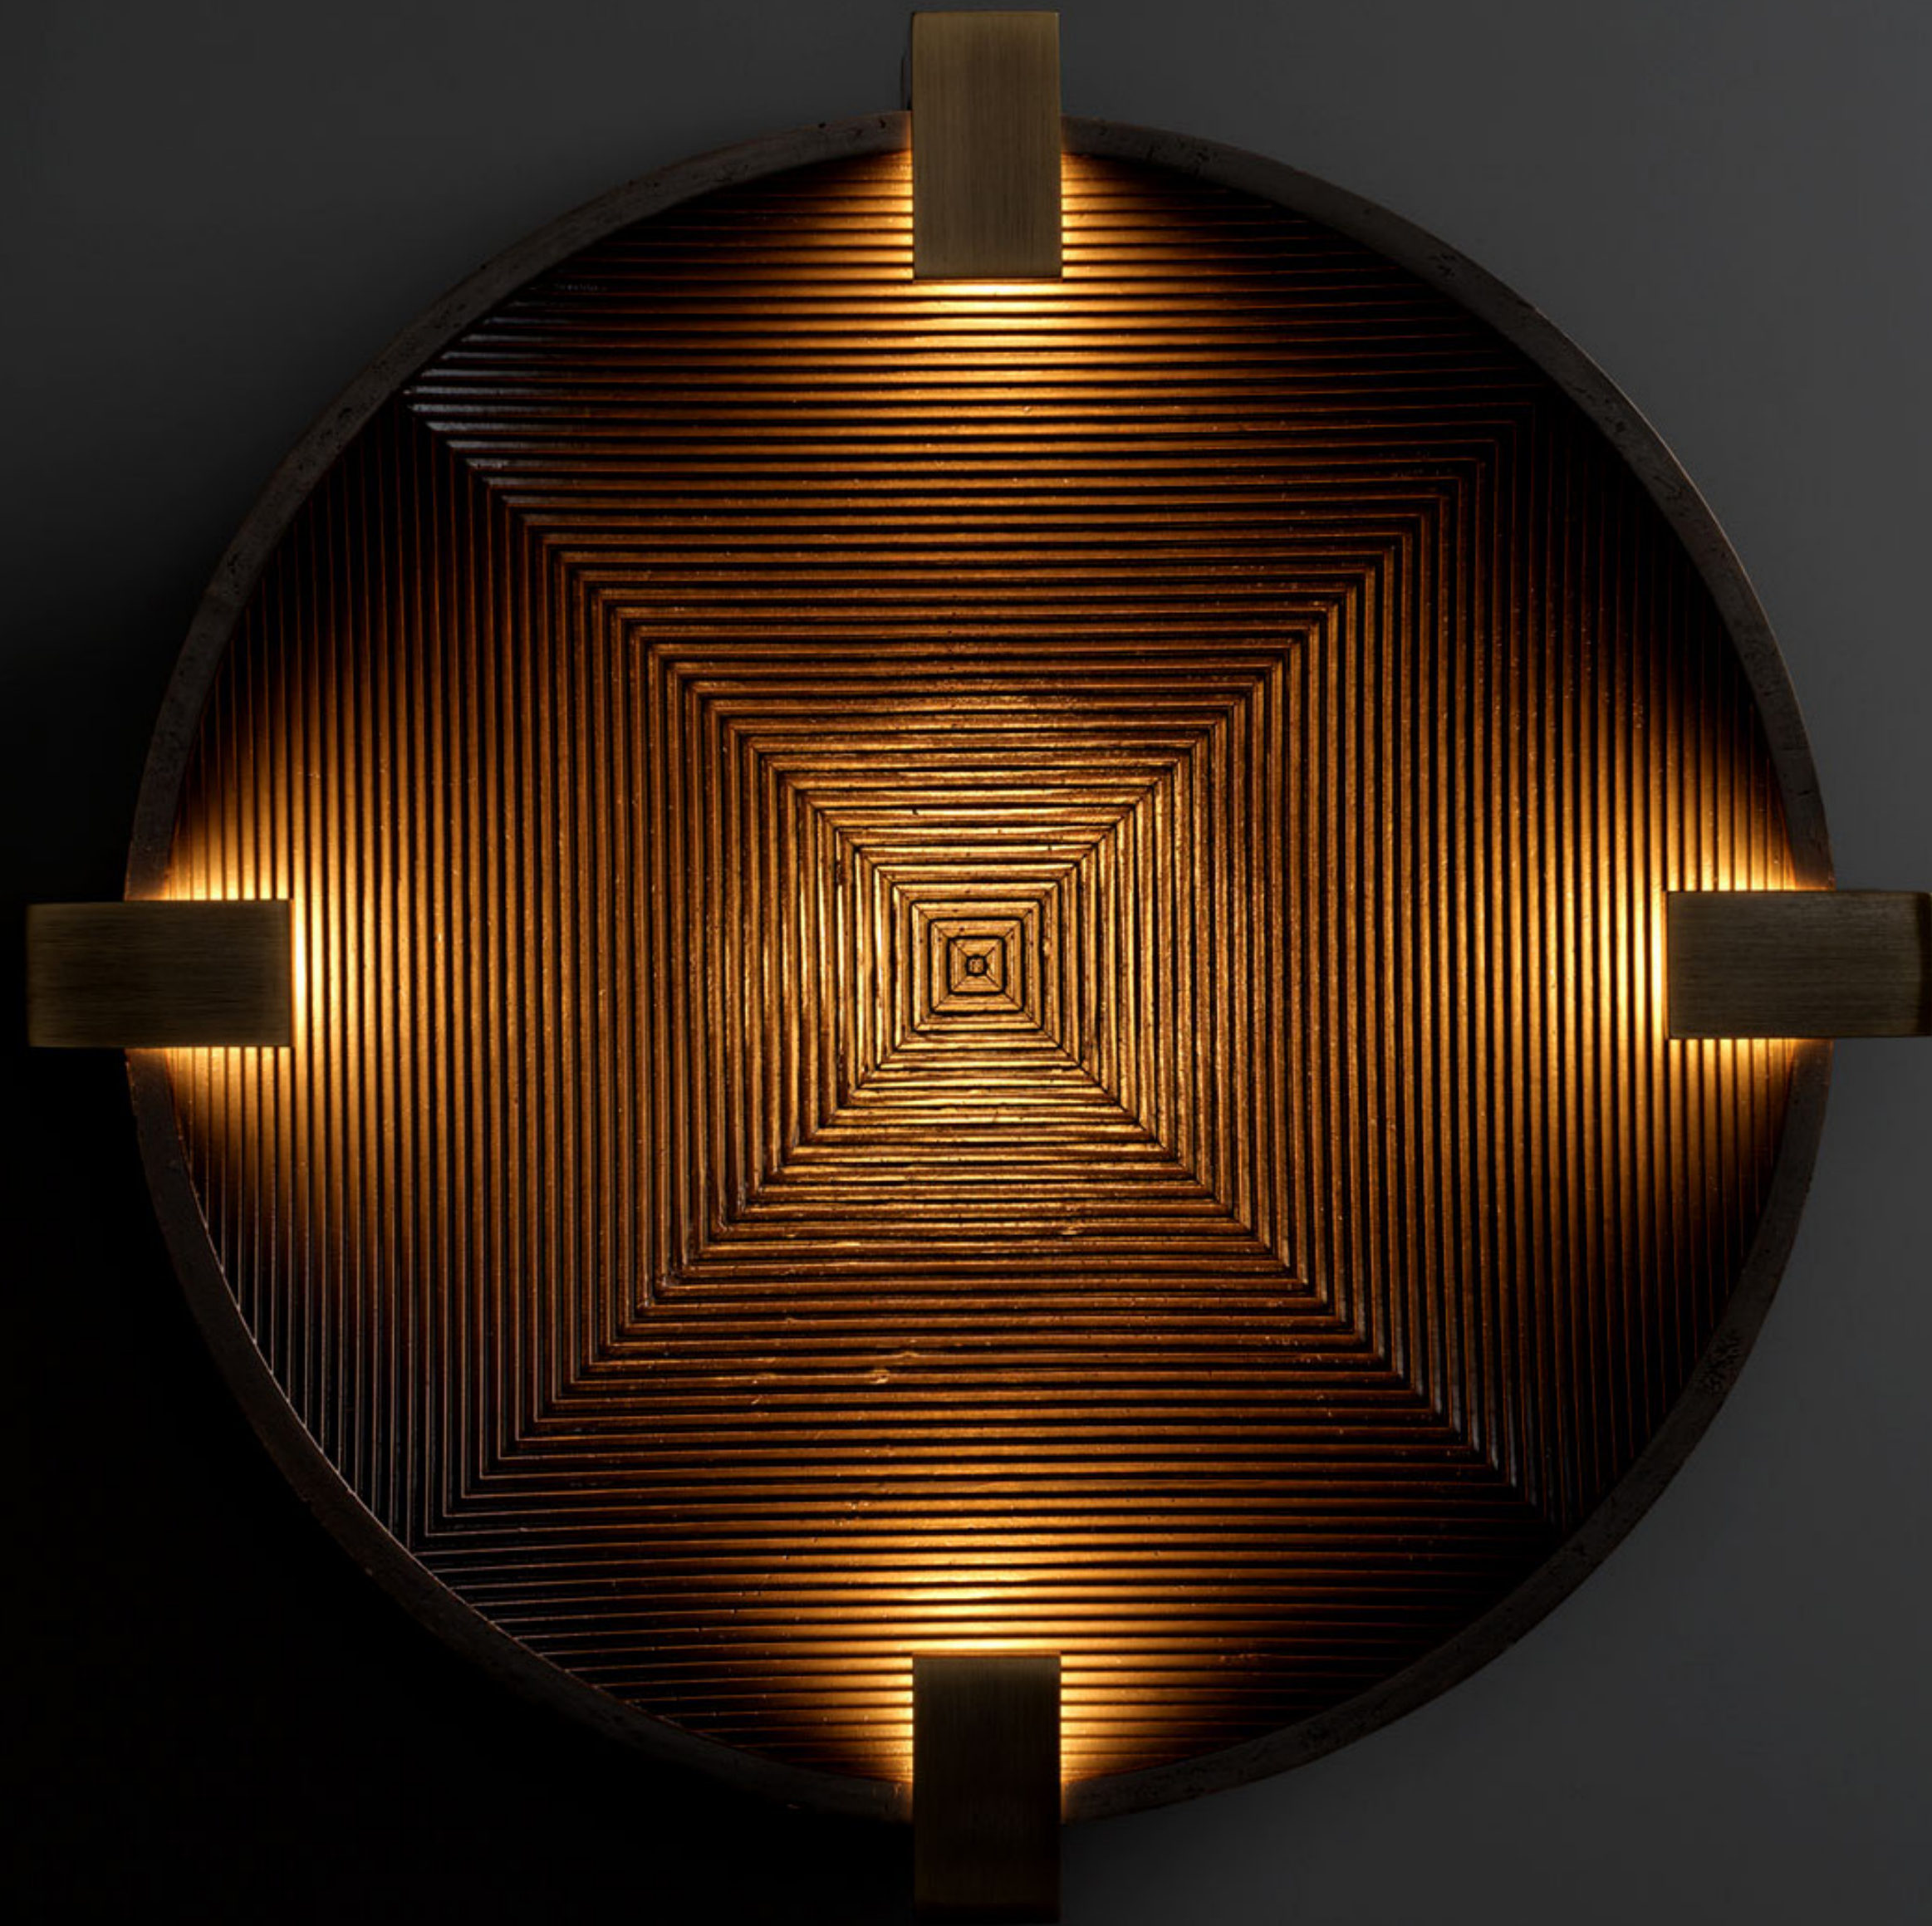

- 10831 Blade Pendant 4'**
- 10832 Blade Pendant 5'**
- 10833 Blade Pendant 6'**
- 10834 Blade Pendant 7'**
- 10835 Blade Pendant 8'**

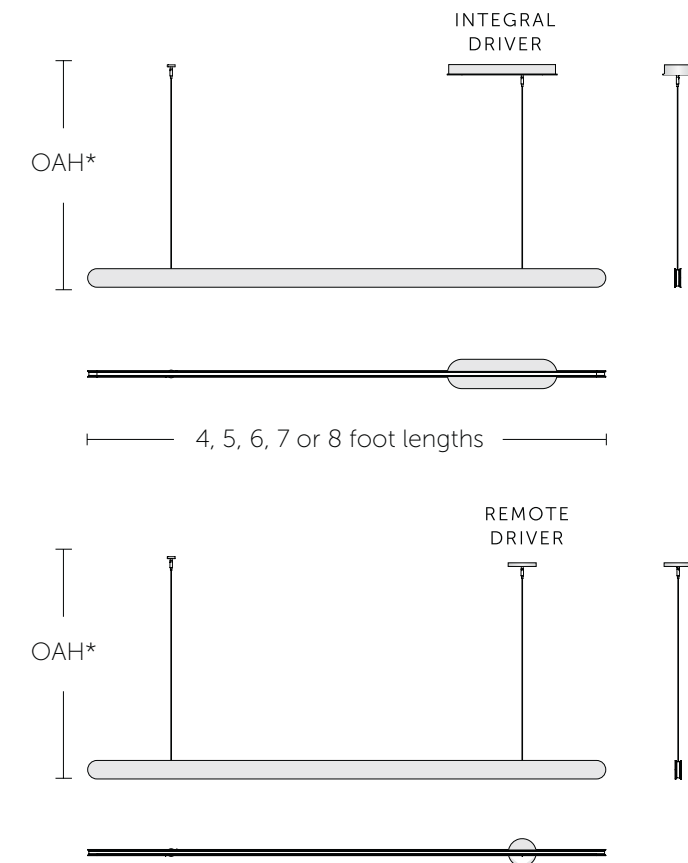

LAMPING/ DIMENSIONS

10831 LED
 62 total watts, Standard 3000K/90+ CRI
 ~3600 Fixture Lumens Universal 120-277V.
 Frame H 3" x W 1" x L 47.75" 17 lbs
 (76mm x 25mm x 1213mm) 7.7 kg

10832 LED
 78 total watts, Standard 3000K/90+ CRI
 ~4500 Fixture Lumens Universal 120-277V.
 Frame H 3" x W 1" x L 59.75" 19 lbs
 (76mm x 25mm x 1518mm) 8.6 kg

10833 LED
 94 total watts, Standard 3000K/90+ CRI
 ~5400 Fixture Lumens Universal 120-277V.
 Frame H 3" x W 1" x L 71.75" 21 lbs
 (76mm x 25mm x 1816mm) 9.5 kg

10834 LED
 102 total watts, Standard 3000K/90+ CRI
 ~6000 Fixture Lumens Universal 120-277V.
 Frame H 3" x W 1" x L 83.75" 23 lbs
 (76mm x 25mm x 2127mm) 10.5 kg

10835 LED
 113 total watts, Standard 3000K/90+ CRI
 ~6500 Fixture Lumens Universal 120-277V.
 Frame H 3" x W 1" x L 95.75" 25 lbs
 (76mm x 25mm x 2432mm) 11.4 kg

Canopy for Integral Driver: 17.75" x 4.75" (451 x 121mm)
 Canopy for Remote Driver: 4.50" x .62" (121mm x 16mm)

Up-light and down-light wired for use with either one or two circuits. The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10V low-voltage dimming controls and wiring.

Height Overall: 12" - 72" (304 - 1829 mm)

STANDARD FINISHES

Black Granite, Dark Bronze, Gossamer Aluminum, Light Bronze, Gloss White.


FOR MORE INFO

RETURN TO INDEX





10821 Lily Sconce

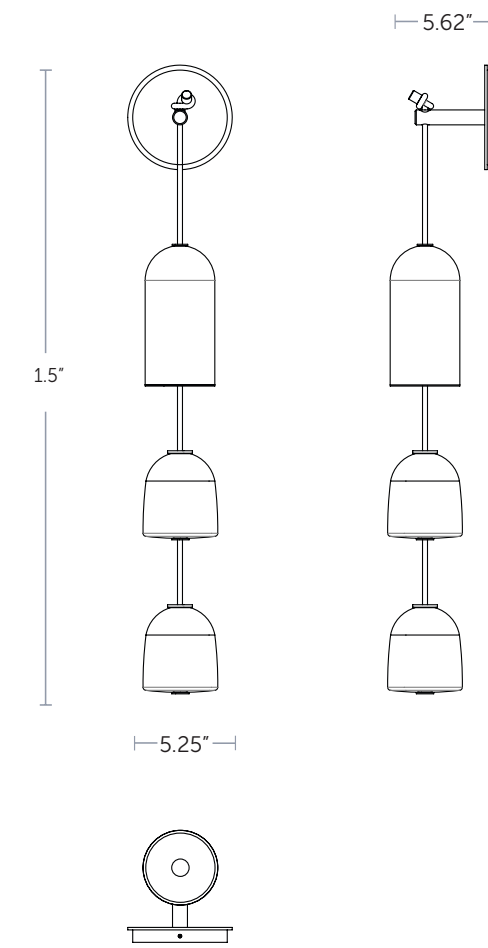

LAMPING

LED

- 3.33 watts
 - 2700 K, 90+ CRI
 - Universal 120-277 V
 - ~300 Fixture Lumens
- Lamps included with fixture

Driver must be mounted remotely

The LED lamps standard in this fixture can be dimmed with basic forward-phase dimming controls and wiring.

UL listed (or equivalent) for damp locations

Shade: gloss white opal glass

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES

- Satin Nickel

CORD COLOR

- Charcoal
- Dark olive
- Red
- Silver
- Warm Tan
- Navy Blue
- Black


FOR MORE INFO

RETURN TO INDEX





10818 Lily Pendant 5

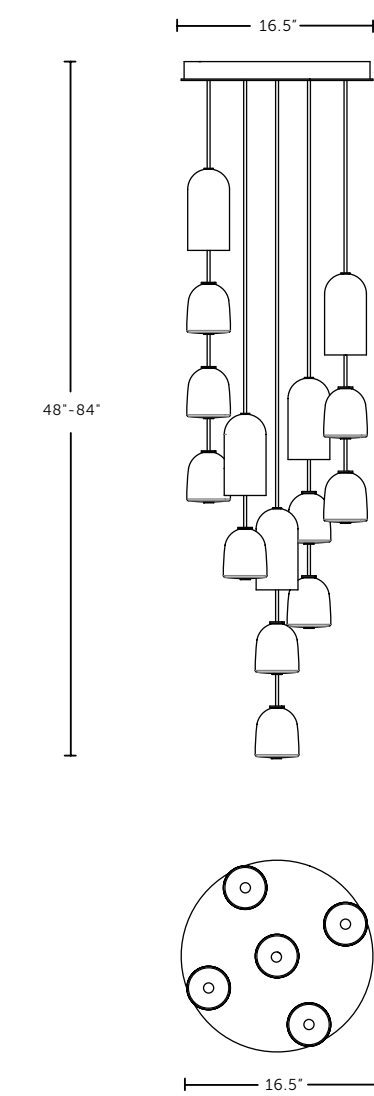

LAMPING

LED

- 20 watts
- 2700 K, 90+ CRI
- Universal 120-277 V
- ~1150 Fixture Lumens
- Lamps included with fixture

The LED lamps standard in this fixture can be dimmed with basic forward-phase dimming controls and wiring.

UL listed (or equivalent) for damp locations

Height Overall: 48" - 84" (1219 - 2134 mm)

Shade: gloss white opal glass

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES

- Satin Nickel

CORD COLOR

- Charcoal
- Dark olive
- Red
- Silver
- Warm Tan
- Navy Blue
- Black


FOR MORE INFO

RETURN TO INDEX





10820 Lily Pendant 9

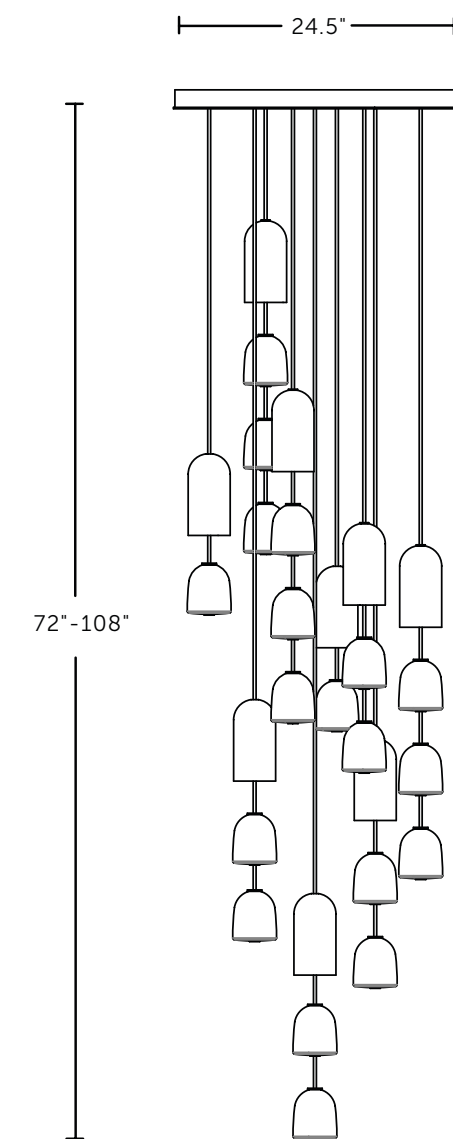

LAMPING

LED

- 34 watts
- 2700 K 90+ CRI
- Universal 120-277 V
- ~2500 Fixture Lumens
- Lamps included with fixture

The LED lamps standard in this fixture can be dimmed with basic forward-phase dimming controls and wiring.

UL listed (or equivalent) for damp locations

Height Overall: 72" - 108" (1829 - 2743 mm)

Shade: gloss white opal glass

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES

- Satin Nickel

CORD COLOR

- Charcoal
- Dark olive
- Red
- Silver
- Warm Tan
- Navy Blue
- Black


FOR MORE INFO

[RETURN TO INDEX](#)





10754 Spire Leaf Pendant

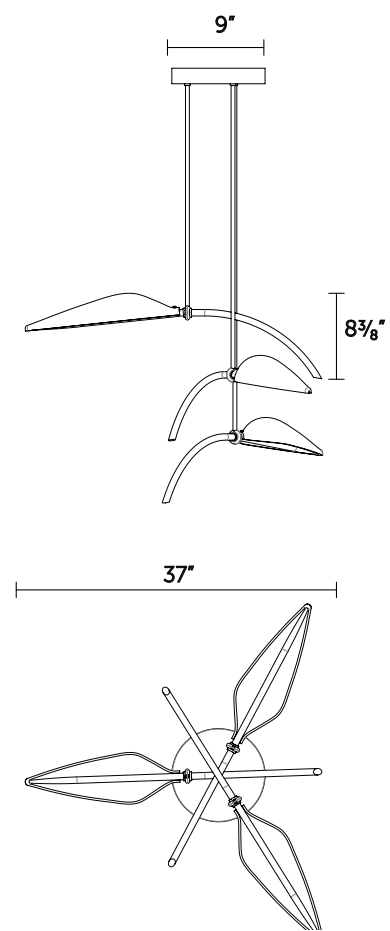

LAMPING

LED

- 25 watts
- 2700 K, 90+ CRI
- Universal 120-277 V
- ~ 1900 Fixture Lumens
- Lamps included with fixture

3000°k color temperature is available.

The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10V low-voltage dimming controls and wiring.

UL listed (or equivalent) for damp locations

Shade: porcelain

Height Overall: 36"-66" (914-1776 mm)

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES

- Satin Nickel

OPTIONS

White Shade
with Gold Leaf


Black Shade
with Gold Leaf

[FOR MORE INFO](#)

[RETURN TO INDEX](#)



10755 Spire Leaf Pendant 9

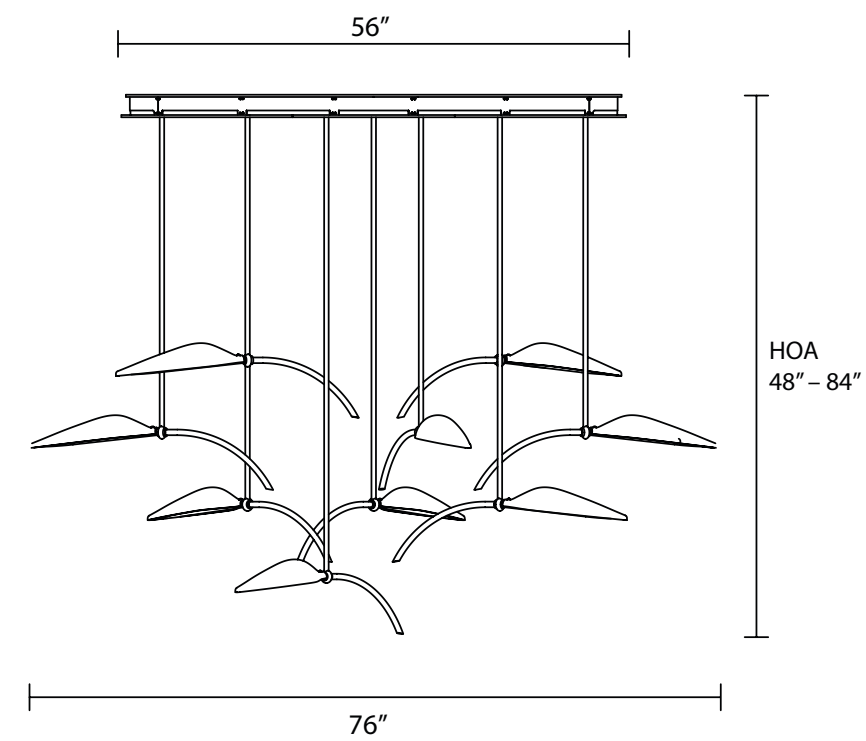

LAMPING

LED

- 70 watts
- 2700 k, 90+ CRI
- Universal 120-277 V
- ~2750 fixture lumens up, ~2500 fixture lumens down.
- Lamps included with fixture

3000°k and 3500°k color temperature is available.

The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10v low-voltage dimming controls and wiring.

Drivers must be mounted remotely.

Shade: Porcelain

Crown brass banding: finished to match stems unless otherwise specified

Crown Aluminum Support Plates: Dark Bronze, Prismatic Gold, Silver Fog, Gossamer Aluminum

Height Overall: 48" - 84 (1219 - 2134 mm)

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES

- Satin Nickel

OPTIONS

White Shade
with Gold Leaf

Black Shade
with Gold Leaf


FOR MORE INFO

RETURN TO INDEX





10854 Callisto Linear 36
10856 Callisto Linear 48
10858 Callisto Linear 60

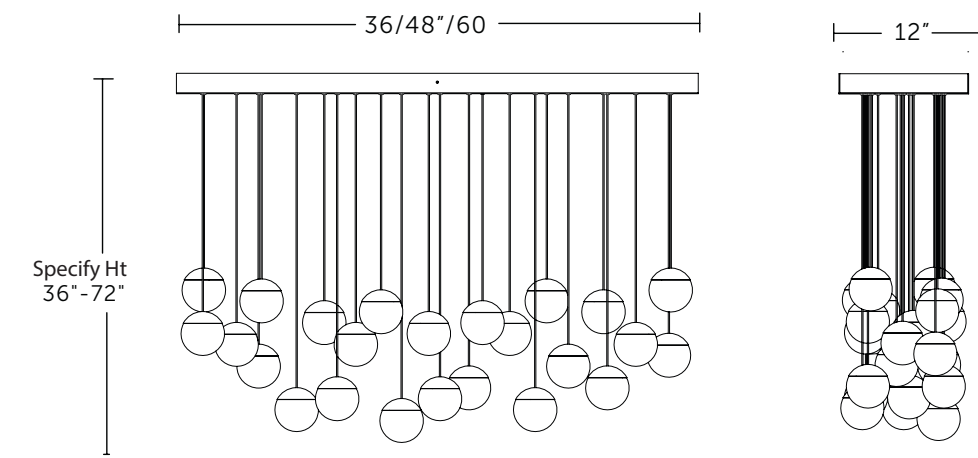

LAMPING

10854 Linear 36

LED

34 watts, ~2700 lumens, Universal 120-277V
Color Temperature: 2700K, 90+ CRI

10856 Linear 48

LED

48 watts, ~3600 lumens, Universal 120-277V
Color Temperature: 2700K, 90+ CRI

10858 Linear 60

LED

60 watts, ~4500 lumens, Universal 120-277V
Color Temperature: 2700K, 90+ CRI

The LED lamps standard in this fixture can be dimmed with ELV;
or MLV; or 0-10V low-voltage dimming controls and wiring.

UL listed (or equivalent) for damp locations

Hanging element: Alabaster

There will be variations in color and veining of alabaster spheres

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Earthen Brass
- Satin Brass

SPECIALTY FINISHES


- Satin Nickel

FOR MORE INFO

RETURN TO INDEX



10849 Callisto Pendant 9
10849 Callisto Pendant 12
10851 Callisto Pendant 18

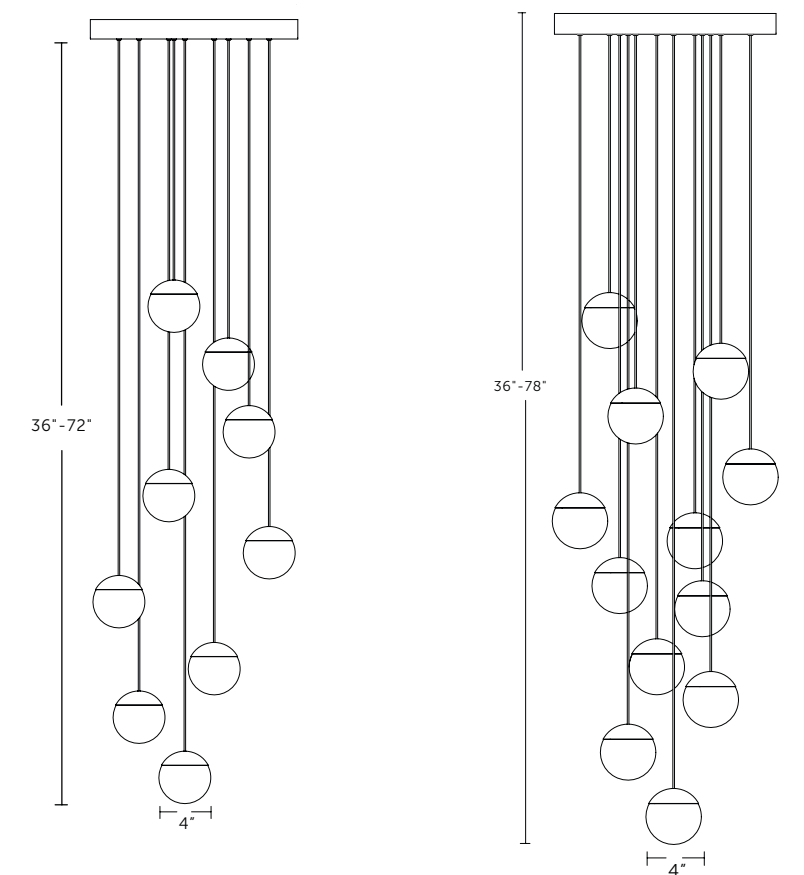

LAMPING

Callisto Pendant 9

- LED**
- 12 watts
 - 2700 k, 90+ CRI
 - Universal 120-277 V
 - ~750 Fixture Lumens
- Lamps included with fixture

Callisto Pendant 12

- LED**
- 22 watts
 - 2700 K 90+ CRI
 - Universal 120-277 V
 - ~ 1800 Fixture Lumens
- Lamps included with fixture

Callisto Pendant 18

- LED**
- 22 watts
 - 2700 K 90+ CRI
 - Universal 120-277 V
 - ~ 1800 Fixture Lumens
- Lamps included with fixture


Hanging element: Alabaster
There will be variations in color and veining of alabaster spheres

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Earthen Brass
- Satin Brass

SPECIALTY FINISHES

- Satin Nickel

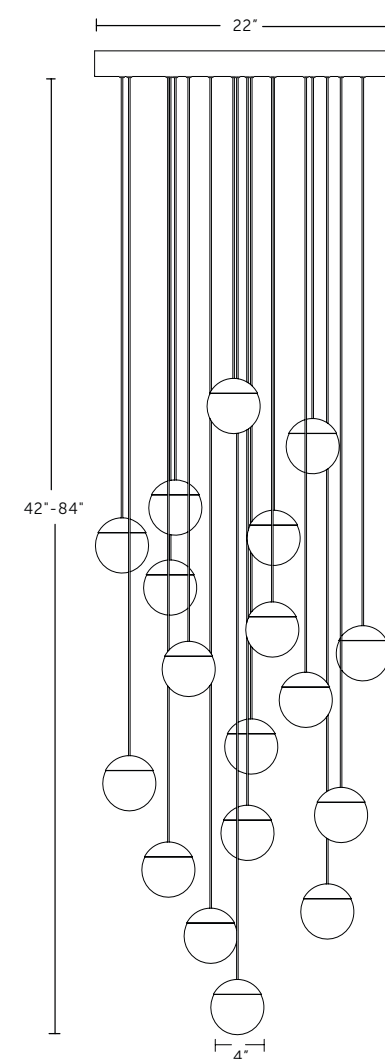


FOR MORE INFO

[RETURN TO INDEX](#)



10740 Ovalo Single 24"
10742 Ovalo Single 36"

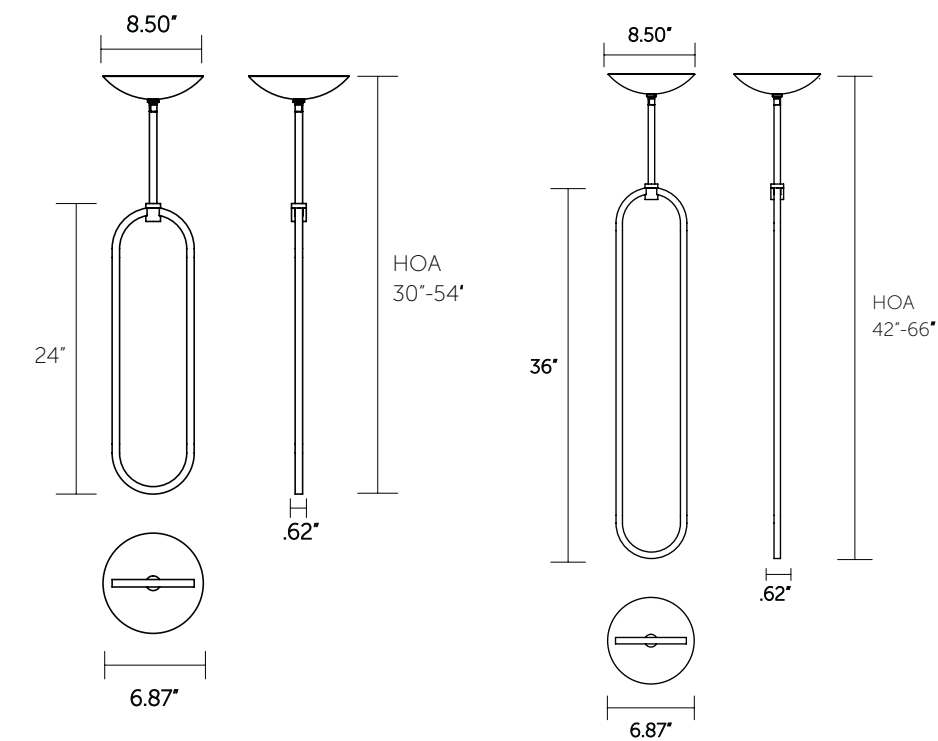

LAMPING

LED

- 25 watts
- 2700 k 90+ CRI
- Universal 120-277 V
- ~ 1900 Fixture Lumens
- Lamps included with fixture

3000°k color temperature is available.

Standard fixture with integral driver is dimmable with 0-10v, ELV, or Triac dimming systems. Contact your local rep for additional information.

Height Overall:

10740 24"
30"-54" (914-1372 mm)

10742 36"
42"-66" (1070-1680 mm)

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES

- Satin Nickel


[FOR MORE INFO](#)

[RETURN TO INDEX](#)





10741 Ovalo Double 24"
10743 Ovalo Double 36"

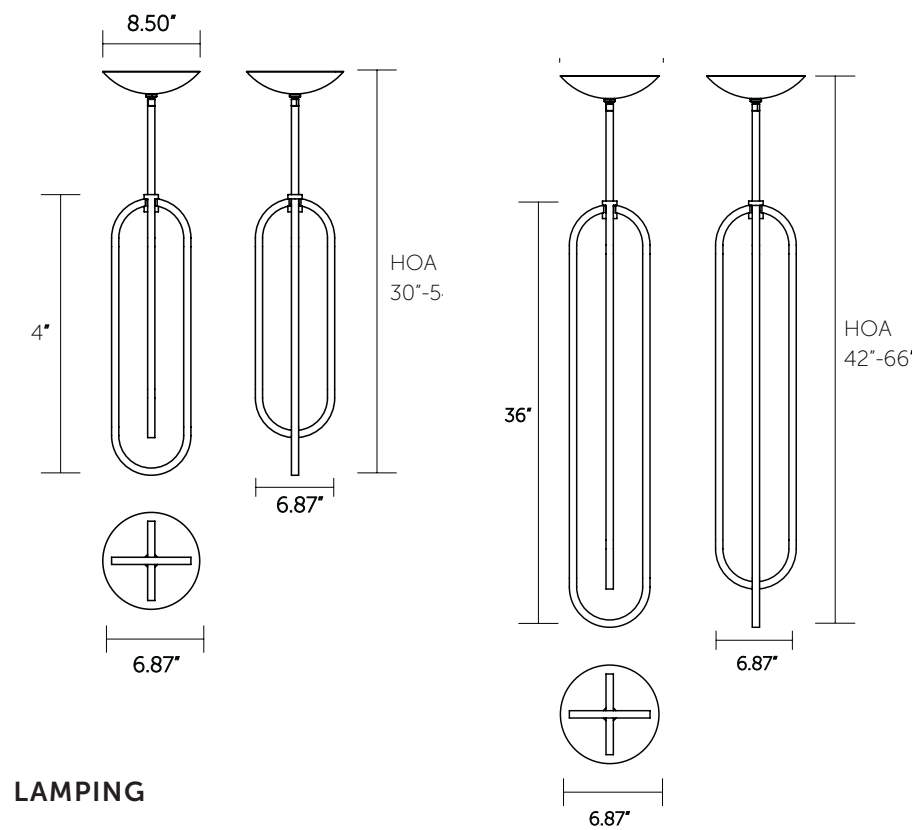

LAMPING

LED

- 25 watts
- 2700 k 90+ CRI
- Universal 120-277 V
- ~ 1900 Fixture Lumens
- Lamps included with fixture

3000°k color temperature is available.

Standard fixture with integral driver is dimmable with 0-10v, ELV, or Triac dimming systems. Contact your local rep for additional information.

Height Overall:

10741 24"
30"-54" (914-1372 mm)

10743 36"
42"-66" (1070-1680 mm)

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES

- Satin Nickel


[FOR MORE INFO](#)

[RETURN TO INDEX](#)





10770 Ovalo Chain Cluster 24"
10771 Ovalo Chain Cluster 36"

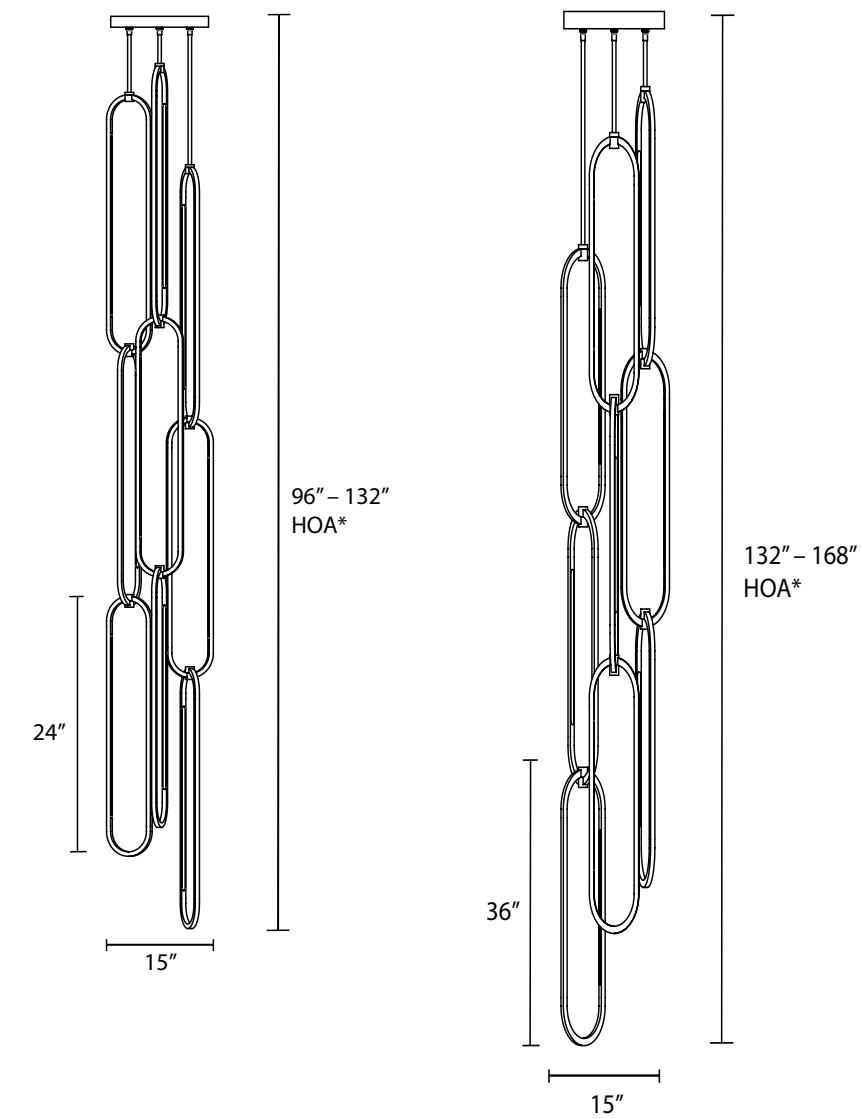

LAMPING

LED

- 150 watts
- 2700 k 90+ CRI
- Universal 120-277 V
- ~ 11000 Fixture Lumens
- Lamps included with fixture

3000°k color temperature is available.

Standard fixture with integral driver is dimmable with 0-10v, ELV, or Triac dimming systems. Contact your local rep for additional information. UL listed (or equivalent) for damp locations

Height Overall:

10770 24"

96"-132" (2438-3353 mm)

10771 36"

132"-168" (3353-4267 mm)

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES


- Satin Nickel

FOR MORE INFO

[RETURN TO INDEX](#)



10766 Eclipse Mirror 32"
10767 Eclipse Mirror 42"

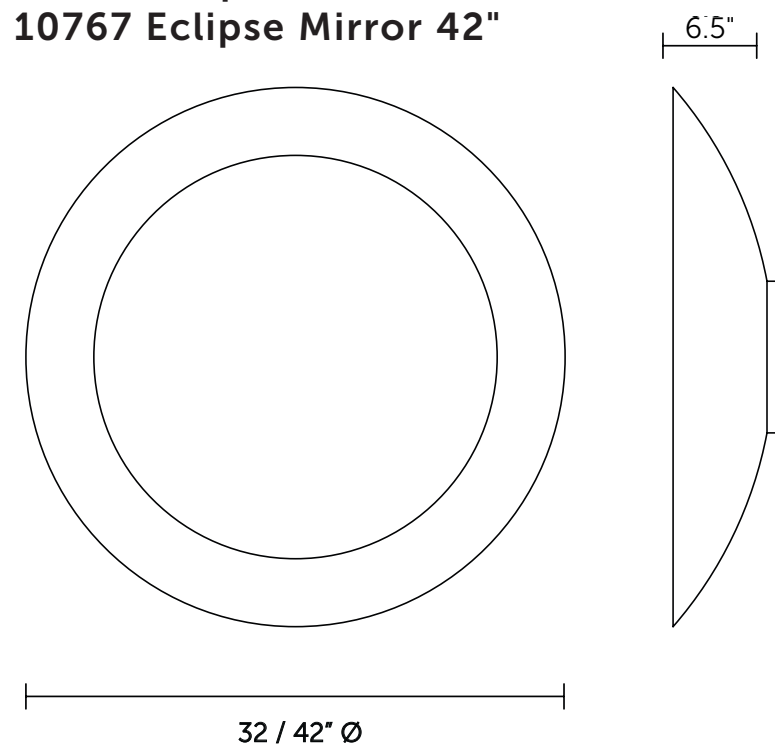

LAMPING

LED

- 36 watts
- 2700 K, 90+ CRI
- Universal 120-277 V
- ~2000 Fixture Lumens
- Lamps included with fixture

The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10v low voltage dimming controls and wiring.

Available in soda-lime and water white glass.

UL listed (or equivalent) for damp locations


STANDARD FINISHES

- Black Granite
- Cloud
- Dark Bronze
- Golden Gate Orange
- Light Bronze


12K White or 22kt Yellow Gold Leafing available for the interior of the bowl

[FOR MORE INFO](#)

[RETURN TO INDEX](#)

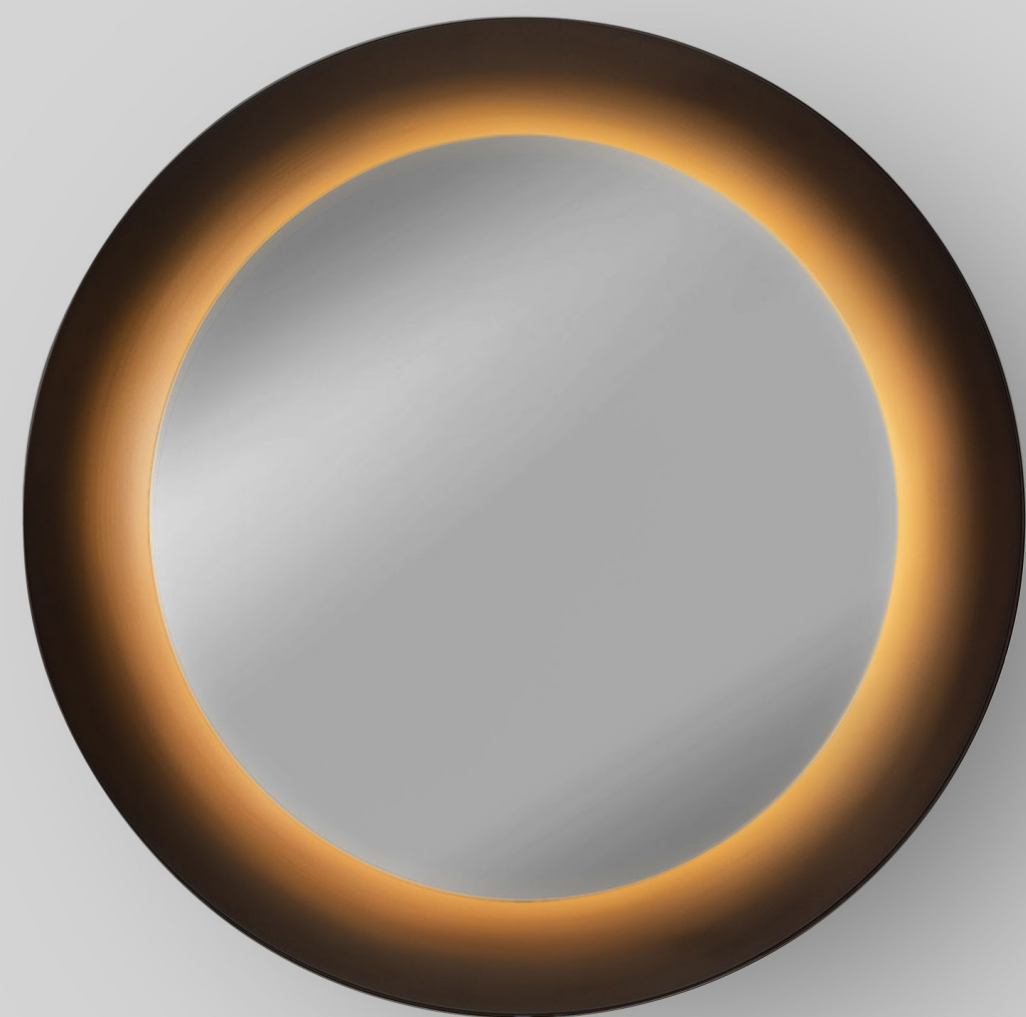

10808 Volterra Mirror Small
10809 Volterra Mirror Large

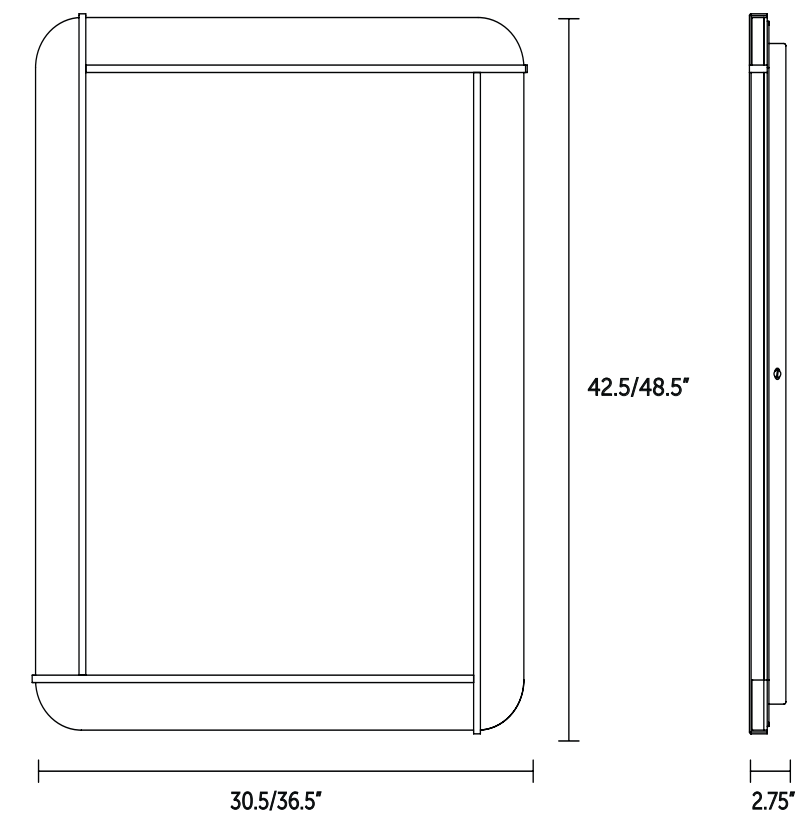

LAMPING

SMALL

- 32 watts
 - 2700 K, 90+ CRI
 - Universal 120-277 V
 - ~1200 Fixture Lumens
- Lamps included with fixture

LARGE

- 40 watts
 - 2700 K, 90+ CRI
 - Universal 120-277 V
 - ~1500 Fixture Lumens
- Lamps included with fixture

3000°k color temperatures are available.

The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10v low voltage dimming controls and wiring.

Decorative Illuminated border: Alabaster
*There will be some variation veining and color of Alabaster.

UL listed (or equivalent) for damp locations

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES


- Satin Nickel

[FOR MORE INFO](#)

[RETURN TO INDEX](#)



10725 Loop Single Sconce

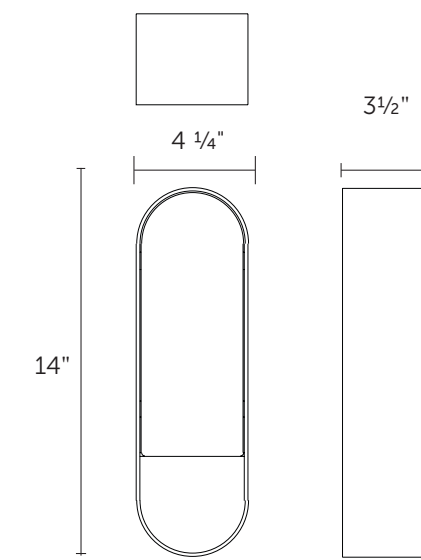

LAMPING

LED

- 7 watts max
- 2700 K 90+ CRI
- Universal 120-277 V
- ~500 fixture lumens
- Lamp included with fixture

3000°k and 3500°k color temperatures, and Warm Dim LEDs are available.

Standard fixture with integral driver is dimmable with 0-10v, ELV, or Triac dimming systems. Upcharges will apply for custom remote dimming. Remote dimmable drivers will offer up to 50% greater lumen output. Contact your local rep for additional information.

UL listed (or equivalent) for damp locations

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass


SPECIALTY FINISHES

- Satin Nickel


FOR MORE INFO

RETURN TO INDEX



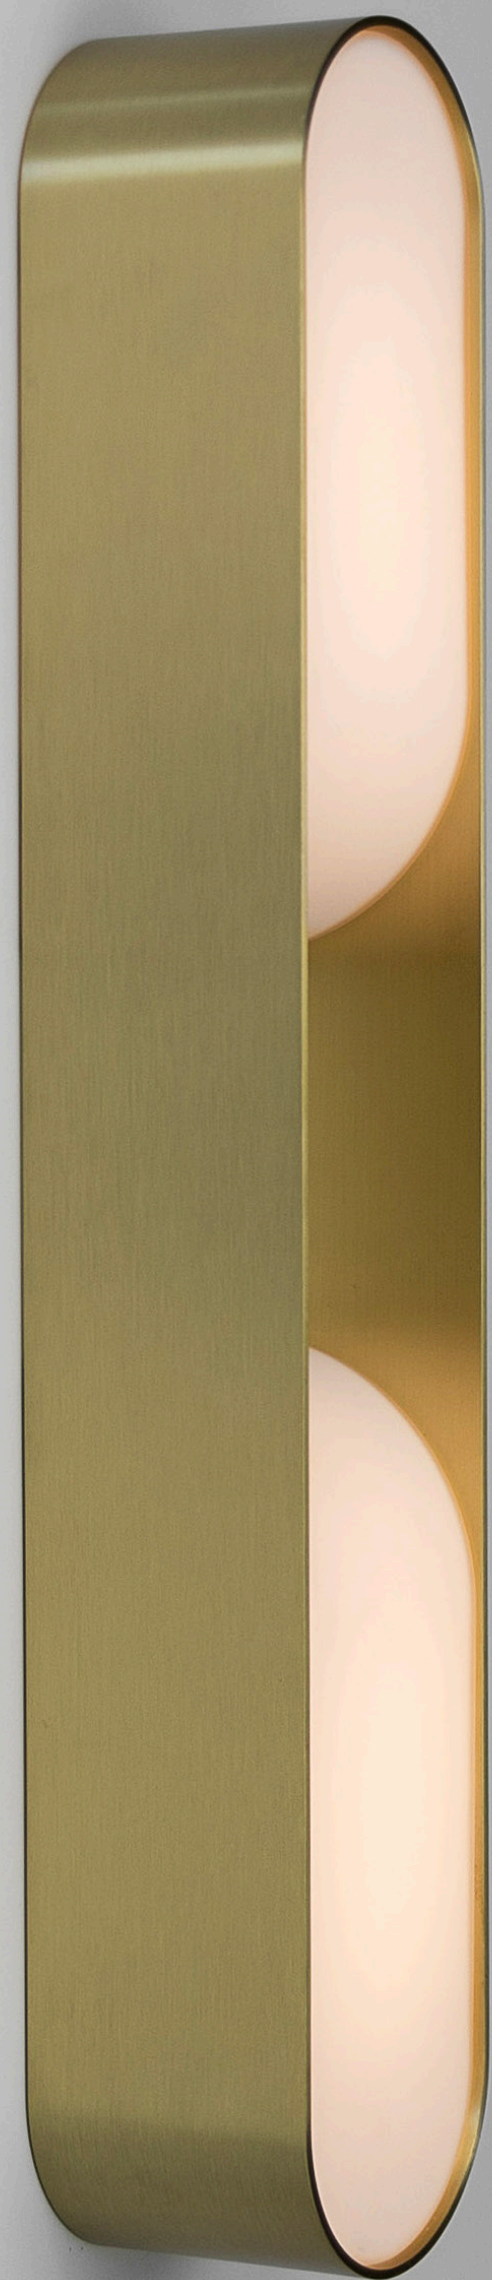

10726 Loop Double Sconce

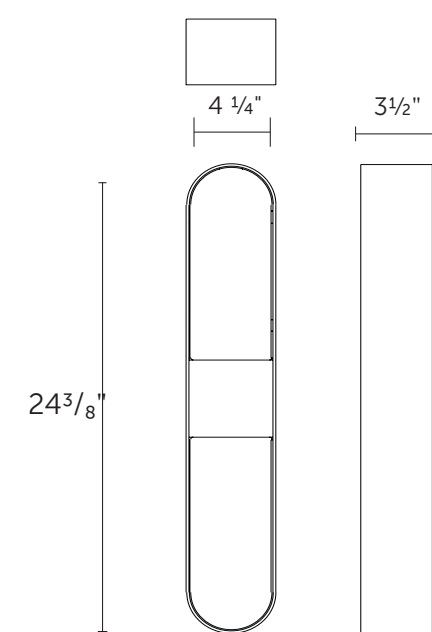

LAMPING

LED

- 18 watts max
- 2700 K 90+ CRI
- Voltage 120 V - 277 V
- ~1000 fixture lumens
- Lamp included with fixture

3000°k and 3500°k color temperatures, and Warm Dim LEDs are available.

Standard fixture with integral driver is dimmable with 0-10v, ELV or Triac dimming systems. Contact your local rep for additional information.

UL listed (or equivalent) for damp locations

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES


- Satin Nickel

[FOR MORE INFO](#)

[RETURN TO INDEX](#)



10728 Loop Pendant 36"
10729 Loop Pendant 48"
10730 Loop Pendant 60"

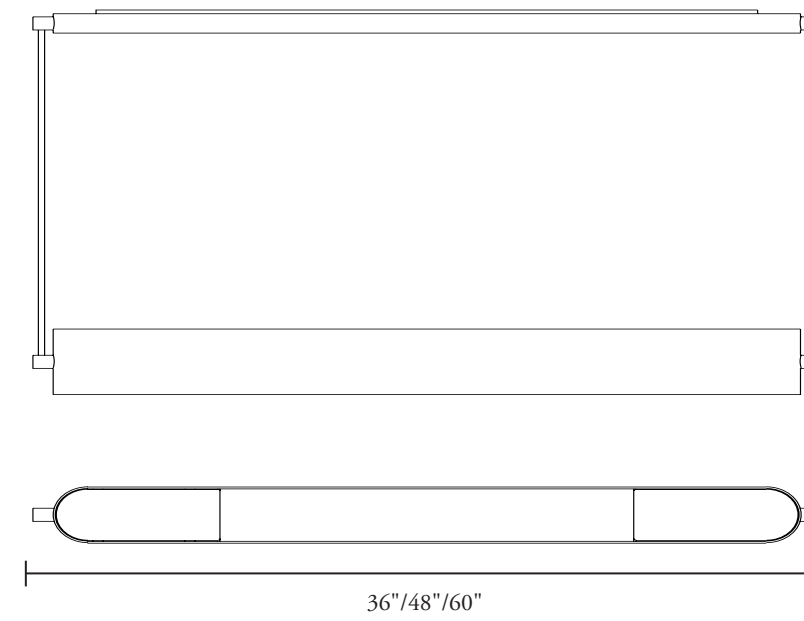

LAMPING

LED

- 36 watts
- 2700 K 90+ CRI
- Universal 120-277 V
- ~3000 Fixture Lumens
- Lamps included with fixture

Standard fixture with integral driver is dimmable with 0-10v, ELV, or Triac dimming systems. Contact your local rep for additional information

UL listed (or equivalent) for damp locations

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES


- Satin Nickel

[FOR MORE INFO](#)

[RETURN TO INDEX](#)



- 10739 Axis Sconce 24"
- 10736 Axis Sconce 30"
- 10737 Axis Sconce 36"
- 10749 Axis Sconce 42"
- 10738 Axis Sconce 48"

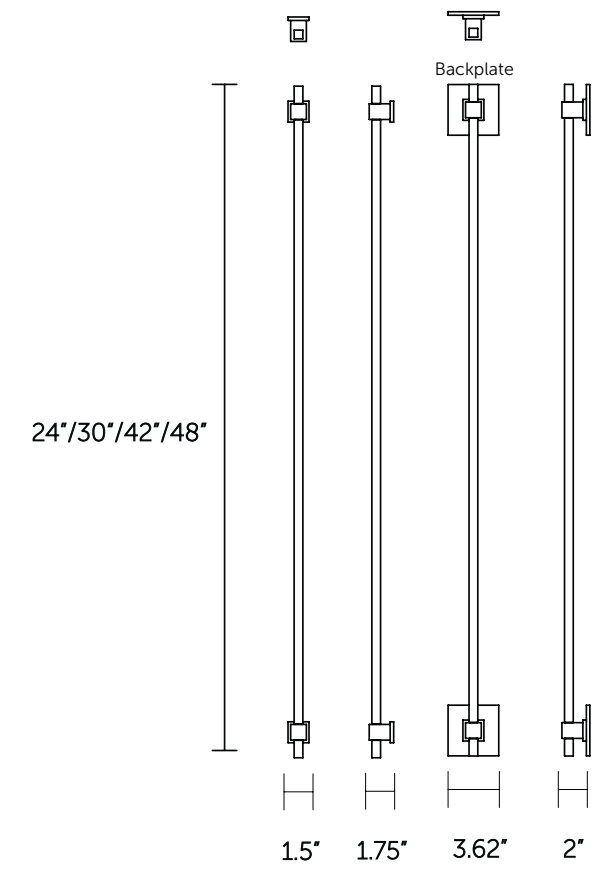

10739 (24")

LED

8 watts ~700 lumens Universal 120v-277v.

Color Temperature: 3000° K 90+ CRI

10736 (30")

LED

11 watts ~850 lumens Universal 120v-277v.

Color Temperature: 3000° K 90+ CRI

10737 (36")

LED

13 watts ~1000 lumens Universal 120v-277v.

Color Temperature: 3000° K 90+ CRI

10749 (42")

LED

15 watts ~1000 lumens Universal 120v-277v.

Color Temperature: 3000° K 90+ CRI

10738 (48")

LED

17 watts ~1000 lumens Universal 120v-277v.

Color Temperature: 3000° K 90+ CRI

2700°k color temperature is available.

Driver must be mounted remotely

Optional Backplates: 3.63" & 2.5" for drywall

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES


- Satin Nickel

FOR MORE INFO

RETURN TO INDEX



10681 Scorpio Sconce 24"
10683 Scorpio Sconce 36"

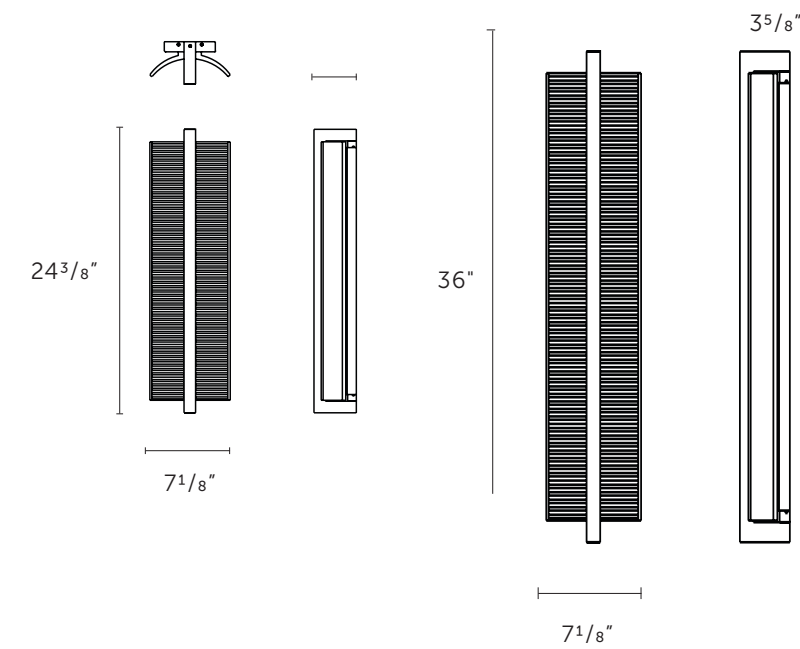

LAMPING

10681 24"

LED

- 17 watts max
- 2700 K
- Universal 120v-277v
- ~1100 lumens
- Lamps included with fixture

10683 36"

LED

- 26 watts max
- 2700 K
- Universal 120v-277v
- ~1500 lumens
- Lamps included with fixture

3000°k and 3500°k color temperatures, and Warm Dim LEDs are available.

Standard fixture with integral driver is dimmable with 0-10v, ELV or Triac dimming systems. Contact your local rep for additional information.

ADA compliant at any mounting height

UL listed (or equivalent) for damp locations

Backplate is cast and may exhibit slight imperfections, consistent with sand castings

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES


- Satin Nickel

FOR MORE INFO

RETURN TO INDEX



10720 Branch Sconce

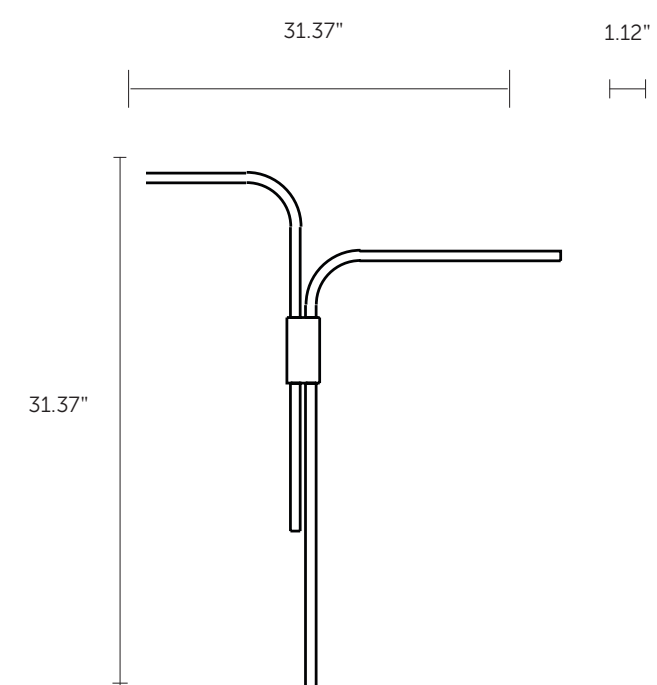

LAMPING

LED

- 14 watts max
 - 2700 K, 90+ CRI
 - Universal 120-277 V
 - ~850 fixture lumens
- Lamp included with fixture

3000°k color temperatures is available.

Standard fixture with integral driver is dimmable with 0-10v, ELV or Triac dimming systems. Contact your local rep for additional information.

Driver must be mounted remotely.

Left and Right orientation versions are available

STANDARD FINISHES

- Satin Brass
- Antiqued Boyd Brass
- Blackened Brass

SPECIALTY FINISHES

- Satin Nickel


FOR MORE INFO

RETURN TO INDEX





10190-Globe Pendant 20"
10191-Globe Pendant 26"
10192-Globe Pendant 35"

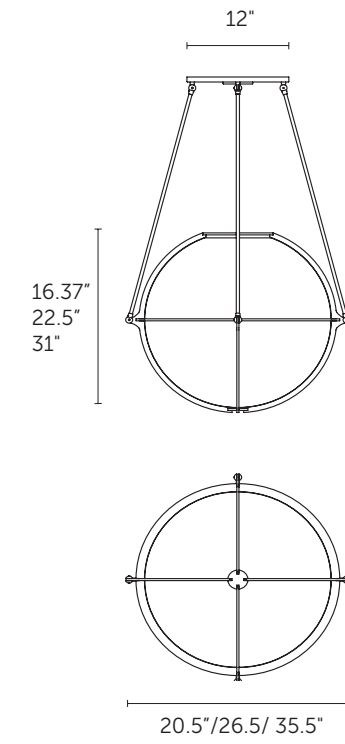

LAMPING

#10190-10191 Incandescent

- One, Medium base, A-21, 200w max
- Compatible with LED Screw-in lamps

#10192 Incandescent

- Two, Medium base A-21, 200w max each
- Compatible with LED Screw-in lamps

Lamps not included with fixture.

LED: GU-24 Base lamping may be able to meet current energy legislation; available upon request.

Canopy: 12" dia x 5/8" H (305 x 16 mm)

UL listed (or equivalent) for damp locations
Pendant has four stems and center cord

Diffuser: gloss white acrylic
Top Diffuser: white perforated metal

STANDARD FINISHES

- Satin Aluminum
- Black Granite
- Cinnamon Bronze
- Matte White
- Coffee Bean

SPECIALTY FINISHES

- Silver Fog


FOR MORE INFO

[RETURN TO INDEX](#)





10178-Parisian Pendant 32"
10179-Parisian Pendant 36"

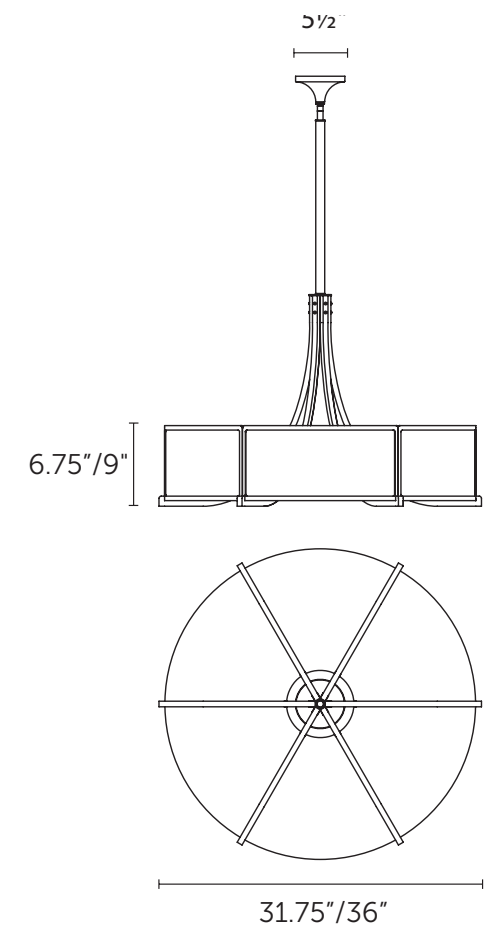

LAMPING

Incandescent

- Six, Medium Base, A-19, 40w max each
- Compatible with LED Screw-in lamps

Lamps not included with fixture.

LED: GU-24 Base lamping may be able to meet current energy legislation; available upon request

Canopy: 5½" dia x 27/8" (140 x 73 mm)

UL listed (or equivalent) for damp locations

Side Panels: white rayon/acetate blend fabric\
Bottom Diffuser: satin white acrylic
Top Diffuser: white perforated metal
Patent Design: D558,912

Height Overall: 30" - 54" (762 - 1372 mm)

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass

STANDARD FINISHES

- Satin Nickel


FOR MORE INFO

RETURN TO INDEX





46001 Emanation (3') Mirrored Sconce
46002 Emanation (4') Mirrored Sconce

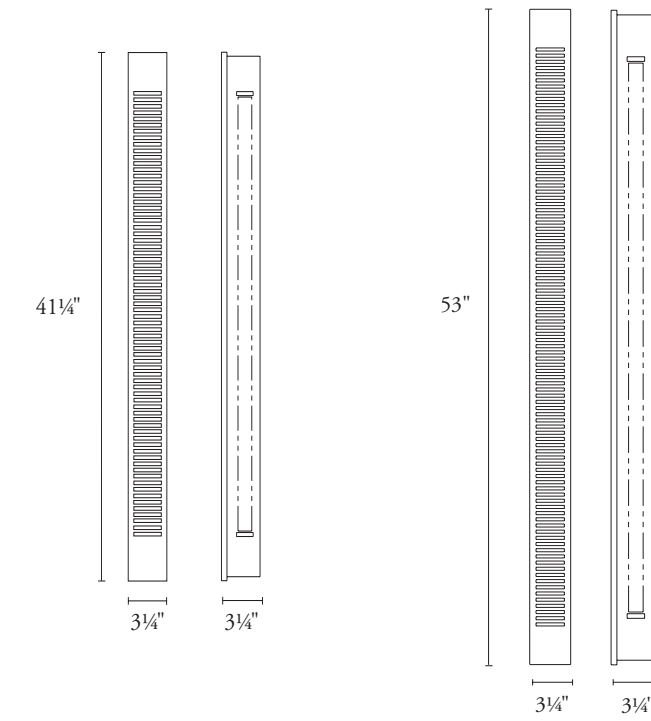

LAMPING

#46001 Emanation (3')

- LED**
- 31 total watts, Standard
 - 3000 K, 90+ CRI
 - Universal 120-277 V
 - ~1600 Fixture Lumens
- Lamp included with fixture

#46002 Emanation (4')

- LED**
- 38 total watts, Standard
 - 3000 K / 90+ CRI
 - Universal 120-277 V
 - ~2000 Fixture Lumens
- Lamp included with fixture

2700°k color temperature is available.

DIMMIING

STANDARD
0-10v.

NON-STANDARD
2 wire MLV/Foward phase/Triac or
2 wire ELV/Reverse phase

Can be either recessed or surface mounted
 Surface mount: must mount to a mud-ring or switch-box
 Recessed mount: see full installation instructions for details


UL listed (or equivalent) for damp locations

STANDARD DIFFUSER

Diffuser: 1/4" soda lime glass mirror

SPECIALTY DIFFUSER

Starphire glass mirror

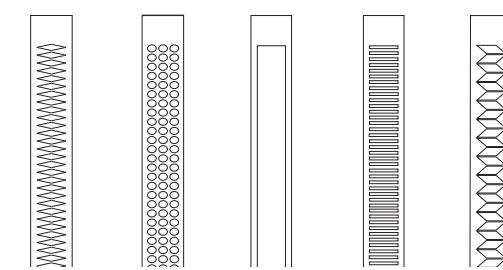

Etched Diffuser Design;
Diamond, Dots, Rectangle, Slots or Zig-zag.

FOR MORE INFO

RETURN TO INDEX



boyd