

CLICK ON THE FIXTURE NAME TO GO THE PAGE

Wall Fixtures Alex Sconce (DA2026) 98 Axis Sconce (10736-10738, 10739, 10749) 36 Branch Sconce (10720) 82 Duet Sconce (10796) 48 Isa Sconce (10821) 102 Lily Sconce (10821) 24 Loop Double (10726) 72 Loop Single (10725) 70 Lucia Artlight 8 Lucia Sconce 4 Obi (10694) 94 Plateau Round (10710, 10711, 10712) 90 Plateau Square (10714, 10715, 10716) 92 Quadrant Sconce (10886) 12 Santa Fe (10698) 84 Scorpio (10681) 96 Spire Sconce (10751) 22 Taos (10700) 88
Ceiling Fixtures Callisto Linear (10854, 10856, 10858) 32 Callisto Pendant (10845,10848,10849,10851) .34 Lily Pendant 1 (10819) 26 Lily Pendant 5 (10818) .28 Lily Pendant 9 (10820) 30
Pendant Fixtures Blade Pendant (10831, 10832, 10833, 10834, 10835) .16 Branch Pendant (10746, 10747,10748) .76 Duet Pendant (10796) .46 Ghost Parabolica (10705, 10706, 10707, 10708) .50 Ghost Rectangle (10701) .54 Ghost Round (10702, 10703) .52 Isa Pendant (DA2016-36,48, 60) .100 Loop Pendant (10728, 10729, 10730) .74 Lucia Pendant (10920, 10927) .6 Nebula Pendant (10780, 10781) .56 Nebula Pendant 3 .58 Nebula Pendant 9 .60 Numi Linear Pendant (10813, 10814) .42 Ovalo Pendant Single (10740, 10472) .66 Ovalo Chain Single Pendant (10744, 10745) .62 Ovalo Chain Cluster Pendant (10770, 10771) .64 Spire Leaf Pendant 3 (10753) .18 Spire Leaf Pendant 9 (10755) .20 Stealth Pendant .10
Table FixturesBranch Table (10721)
Floor Fixtures Branch Floor (10722)
Accessories Eclipse Mirror (10766, 10767)


boyd

BOYD'S DESIGN
VISION OF THE LAST
FIVE YEARS UNDER
THE GUIDANCE OF
CREATIVE DIRECTOR
SCHUYLER SWEET





10886-10879 Lucia Sconce

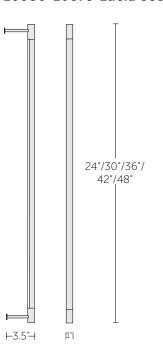

LAMPING

10876 LED

11 total watts, Standard 3000K/98+ CRI ~825 Fixture Lumens Universal 120-277V. W 1" x L 24" x Projection 3.5" 7 lbs (25mm x 610mm x 90mm) 3.2 kg 10876 LED 14 total watts, Standard 3000K/98+ CRI ~1100 Fixture Lumens Universal 120-277V. W 1" x L 30" x Projection 3.5" 8 lbs (25mm x 762mm x 90mm) 3.6 kg 10877 LED 16 total watts, Standard 3000K/98+ CRI ~1250 Fixture Lumens Universal 120-277V. W 1" x L 36" x Projection 3.5" 9 lbs (25mm x 914mm x 90mm) 4 kg 10878 LED 20 total watts, Standard 3000K/98+ CRI ~1500 Fixture Lumens Universal 120-277V. W 1" x L 42" x Projection 3.5" 10 bs (25mm x 1067mm x 90mm) 4.5 kg 10879 LED 27 total watts, Standard 3000K/98+ CRI ~2100 Fixture Lumens Universal 120-277V. W 1" x L 48" x Projection 3.5" 11 lbs (25mm x 1067mm x 90mm) 4.5 kg


NOTES

- UL listed (or equivalent) for damp locations.
- Backplates: $2\text{"}\text{Ø} \times 3/8\text{"}$ (51 x 10mm) or a 7/8 'Ø trim plate on premium mud style.
- 270 degree rotation
- $\bullet~$ The lamps standard in this fixture can be dimmed with 0-10V or forward-phase style dimmers.
- Driver must be mounted remotely.
- End Cap Style: Knurled or Smooth.

STANDARD FINISHES


- Earthen Bronze
- Blackened Bronze
- Satin Bronze


SPECIALTY FINISHES

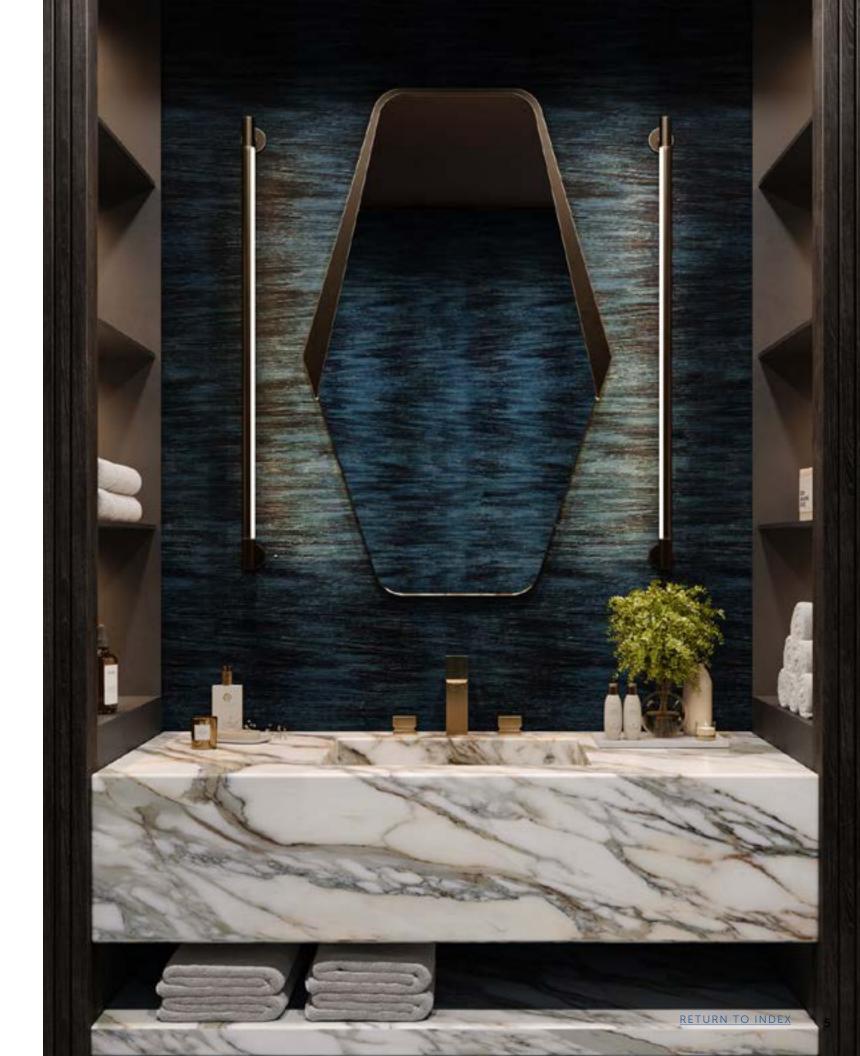



10920 -10927 Lucia Pendant





LAMPING/ DIMENSIONS

← 4, 5, 6 foot lengths ← ←

#C-10920

Standard 2700K/90+ CRI 18 total watts with ~1650 Fixture Lumens L 48" x W 1" x H 1" 11 lbs 1219mm x 25mm x 25mm 5 kg

-8, 10 or 12 foot lengths -

#C-10921

Standard 2700K/90+ CRI 22 total watts with ~2000 Fixture Lumens L 60" x W 1" x H 1" 13 lbs

1524mm x 25mm x 25mm 5.9 kg

#C-10922

Standard 2700K/90+ CRI 25 total watts with ~2300 Fixture Lumens L 72" x W 1" x H 1" 15 lbs 1829mm x 25mm x 25mm

6.8 kg

#C-10925

Standard 2700K/90+ CRI 36 total watts with ~3300 Fixture Lumens L 94" x W 1" x H 1" 22 lbs 2388mm x 25mm x 25mm

10 kg

#C-10926

Standard 2700K/90+ CRI 43 total watts with ~4000 Fixture Lumens L 118" x W 1" x H 1"

26 lbs 2997mm x 25mm x 25mm 11.8 kg

#C-10926

Standard 2700K/90+ CRI 50 total watts with ~4600 Fixture Lumens L 142" x W 1" x H 1" 30 lbs 3607mm x 25mm x 25mm 13.6 kg

NOTES


- All Fixtures are Universal 120-277V
- 3000K color temperature is available
- UL listed (or equivalent) for damp locations
- Uplight or downlight orientation
- Specify Height: 12" 72" (304-1828mm)
- Custom ϑ longer lengths can be designed upon request.
- The lamps standard in this fixture can be dimmed with ELV or MLV style dimmers. 0-10V optional.
- Both stem and coax versions can be rotated 270 degrees, but the coax version will have a set screw to maintain the placement of the orientation.
- Drivers must be mounted remotely.

MATERIAL

Architectural Bronze

FINISHES

Antiqued Bronze, Blackened Bronze, Earthen Bronze, Satin Bronze, Satin Nickel.

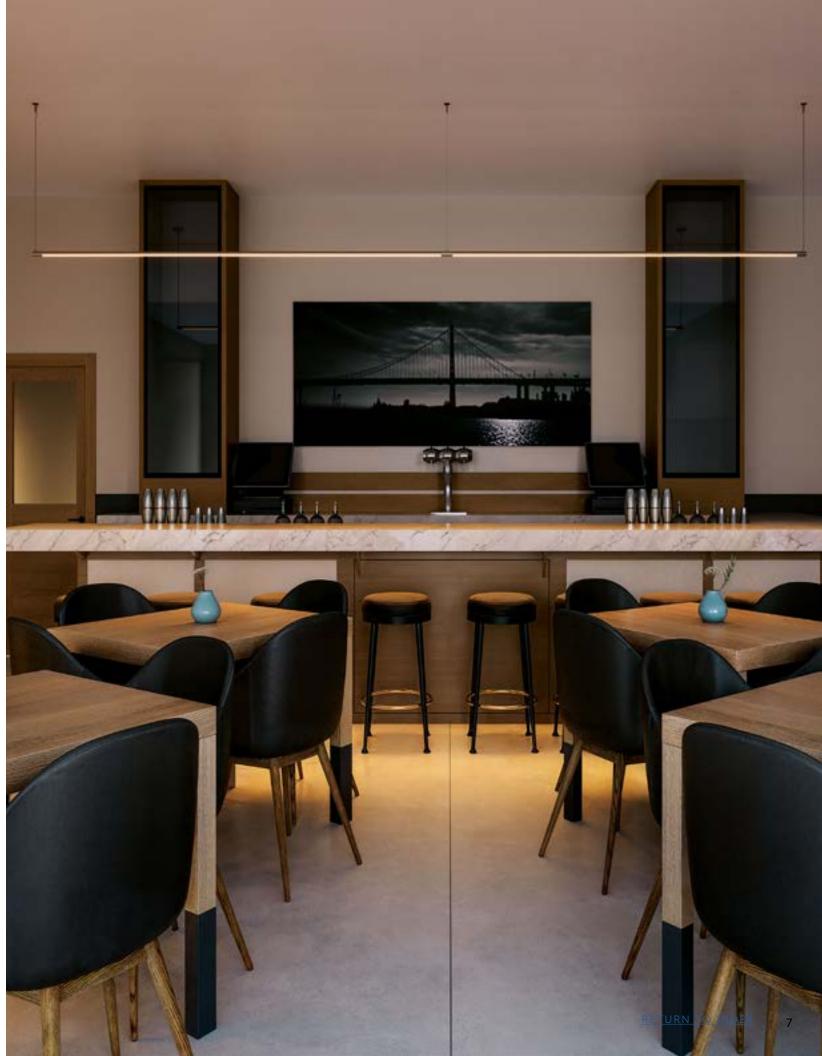

10824-10830 Lucia Art Light




24"/30"/36"/42"/48"/54"/6	0" ———
Ī	
24"/30"/36"/42"/48"/54"/6	0" —
LAMPING/ DIMENSIONS	
10824 LED 12 total watts, Standard 3000K/98+ CRI	
~1300 Fixture Lumens Universal 120-277V. H 1" x L 24" x Projection 9"	7 lbs
(25mm x 610mm x 229mm)	3.2 kg
10825 LED 15 total watts, Standard 3000K/98+ CRI	
~1600 Fixture Lumens Universal 120-277V. H 1" x L 30" x Projection 9"	8 lbs
(25mm x 762mm x 229mm)	3.6 kg
10826 LED 19 total watts, Standard 3000K/98+ CRI	
~2000 Fixture Lumens Universal 120-277V. H 1" x L 36" x Projection 9"	9 lbs
(25mm x 914mm x 229mm)	4 kg
10827 LED 24 total watts, Standard 3000K/98+ CRI	
~2550 Fixture Lumens Universal 120-277V. H 2" x L 42" x Projection 9"	10 lbs
(25mm x 1067mm x 229mm)	4.5 kg
10828 LED 27 total watts, Standard 3000K/98+ CRI	
~2900 Fixture Lumens Universal 120-277V. H 1" x L 48" x Projection 9"	11 lbs
(25mm x 1219mm x 229mm)	5kg
10829 LED 32 total watts, Standard 3000K/98+ CRI	
~3400 Fixture Lumens Universal 120-277V. H 1" x L 54" x Projection 9"	12lbs
(25mm x 1371mm x 229mm)	5.5kg
10830 LED 36 total watts, Standard 3000K/98+ CRI	
~3800 Fixture Lumens Universal 120-277V. H 1" x L 54" x Projection 9"	12lbs
(25mm x 1371mm x 229mm)	5.5kg
Notes	

- UL listed (or equivalent) for damp locations.
- Backplates: 2"ø x 3/8" (51 x 10mm) or a 7/8"ø trim plate on premium mud style.
- Wire Exit Location: left end or right end.
- The lamps standard in this fixture can be dimmed with ELV or MLV style dimmers
- Driver must be mounted remotely.
- End Cap Style: Knurled or Smooth.

STANDARD FINISHES

- Earthen Bronze
- Blackened Bronze
- Satin Bronze


SPECIALTY FINISHES

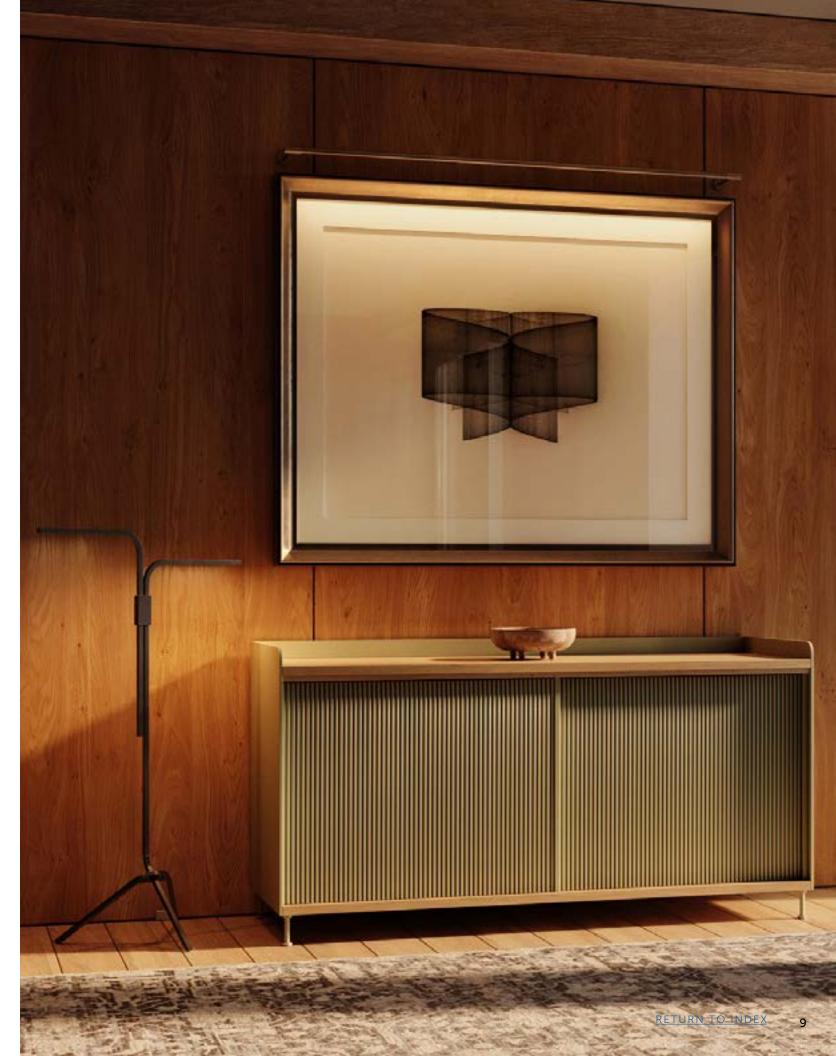






10869-10871 Stealth Pendant



WITH INTEGRAL DRIVER



WITH REMOTE DRIVER

LAMPING/ DIMENSIONS

#C-10869 Standard 3000K/90+ CRI

43 total watts ~3600 Fixture Lumens
L 59.75" x W 4" x Frame Ht 1.5" 25 lbs
1518mm x 102mm x 38mm 11.4 kg

#C-10870

Standard 3000K/90+ CRI
50 total watts ~3600 Fixture Lumens
L 71.25"" x W 4" x Frame Ht 1.5"
29 lbs
1822mm x 102mm x 38mm
13.2 kg

#C-108701

Standard 3000K/90+ CRI
56 total watts ~3600 Fixture Lumens
L 83.75"" x W 4" x Frame Ht 1.5" 33 lbs
2127mm x 102mm x 38mm 15 kg

CANOPY OPTIONS

Full size (integral drivers) or 2" Medallions (remote drivers)

NOTE

- UL listed (or equivalent) for damp locations
- All fixtures are Universal 120-277V.
- Up-light and down-light wired for use with either one or two circuits
- Specify Height: 12" 72" (304-1829mm)
- The lamps standard in this fixture can be dimmed with 0-10v, ELV or MLV style dimmers.

MATERIAL

Aluminum

FINISHES


Black Granite, Dark Bronze, Gossamer Aluminum, Light Bronze.

© 2025 Boyd Lighting Company | Rev 01/29/25





10886 Quadrant Sconce



LAMPING

LED

- 11 watts 2700 K, 90+ CRI
- Universal 120-277 V
- ~ 600 Fixture Lumens
- Lamps included with fixture

3000°k color temperature is available.

The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10V low- voltage dimming controls and wiring.


UL listed (or equivalent) for damp locations

Backplate is cast and may exhibit slight imperfections, consistent with the casting process.

STANDARD FINISHES


- Antiqued Bronzes
- Blackened Bronze


SPECIALTY FINISHES

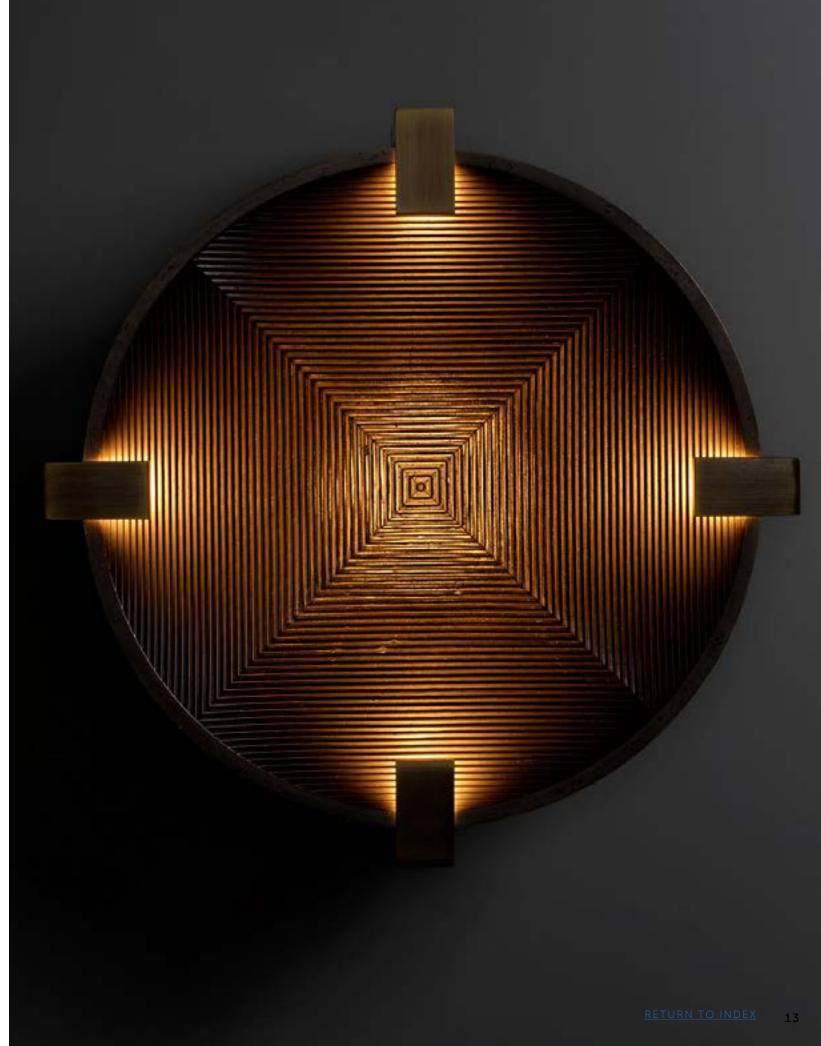



10754 Spire Leaf Pendant





LAMPING

LED

- 25 watts
- 2700 K, 90+ CRI Universal 120-277 V
- ~ 1900 Fixture LumensLamps included with fixture

3000°k color temperature is available.

The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10V low-voltage dimming controls and wiring.

UL listed (or equivalent) for damp locations Shade: porcelain

Height Overall: 36"-66" (914-1776 mm)

STANDARD FINISHES

- Antiqued Boyd BrassBlackened Brass
- Satin Brass

SPECIALTY FINISHES

Satin Nickel


OPTIONS White Shade with Gold Leaf


Black Shade with Gold Leaf





10831 Blade Pendant 4' 10832 Blade Pendant 5' 10833 Blade Pendant 6' 10834 Blade Pendant 7' 10835 Blade Pendant 8'





LAMPING/ DIMENSIONS

10831 LED

62 total watts, Standard 3000K/90+ CRI ~3600 Fixture Lumens Universal 120-277V. Frame H 3" x W 1" x L 47.75" 17 lbs (76mm x 25mm x 1213mm) 7.7 kg

10832 LED

78 total watts, Standard 3000K/90+ CRI ~4500 Fixture Lumens Universal 120-277V. Frame H 3" x W 1" x L 59.75" 19 lbs (76mm x 25mm x 1518mm) 8.6 kg

10833 LED

94 total watts, Standard 3000K/90+ CRI ~5400 Fixture Lumens Universal 120-277V. Frame H 3" x W 1" x L 71.75" 21 lbs (76mm x 25mm x 1816mm) 9.5 kg

10834 LED

102 total watts, Standard 3000K/90+ CRI ~6000 Fixture Lumens Universal 120-277V. Frame H 3" x W 1" x L 83.75" 23 lbs (76mm x 25mm x 2127mm) 10.5 kg

10835 LEC

113 total watts, Standard 3000K/90+ CRI ~6500 Fixture Lumens Universal 120-277V. Frame H 3" x W 1" x L 95.75" 25 lbs (76mm x 25mm x 2432mm) 11.4 kg

Canopy for Integral Driver: 17.75" x 4.75" (451 x 121mm) Canopy for Remote Driver: 4.50" x .62" (121mm x 16mm)

Up-light and down-light wired for use with either one or two circuits. The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10V low-voltage dimming controls and wiring.

Height Overall: 12" - 72" (304 - 1829 mm)


STANDARD FINISHES

Black Granite, Dark Bronze, Gossamer Aluminum, Light Bronze, Gloss White.





10753 Spire Pendant 3



LAMPING

LED

- 25 watts
- 2700 K, 90+ CRI
- Universal 120-277 V
- ~ 1900 Fixture Lumens
- Lamps included with fixture

3000°k color temperature is available.

The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10V low-voltage dimming controls and wiring.

UL listed (or equivalent) for damp locations Shade: porcelain

Height Overall: 36"-66" (914-1776 mm)

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass Satin Brass

SPECIALTY FINISHES

Satin Nickel

OPTIONS White Shade with Gold Leaf


Black Shade with Gold Leaf



© 2025 Boyd Lighting Company | Rev 01/29/25



10755 Spire Leaf Pendant 9



LAMPING

LED

- 70 watts
- 2700 k, 90+ CRI
- Universal 120-277 V
- ~2750 fixture lumens up, ~2500 fixture lumens down.
- · Lamps included with fixture

3000°k and 3500°k color temperature is available.

The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10v low-voltage dimming controls and wiring.

Drivers must be mounted remotely.

Shade: Porcelain

Crown brass banding: finished to match stems unless otherwise specified

Crown Aluminum Support Plates: Dark Bronze, Prismatic Gold, Silver Fog, Gossamer Aluminum

Height Overall: 48" - 84 (1219 - 2134 mm)

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES

• Satin Nickel


OPTIONS

White Shade with Gold Leaf

Black Shade with Gold Leaf



10751 Spire Sconce



LAMPING

LED

- 25 watts
- 2700 K, 90+ CRI Universal 120-277 V
- ~ 1900 Fixture Lumens
- Lamps included with fixture

3000°k color temperature is available.

The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10V low-voltage dimming controls and wiring.

UL listed (or equivalent) for damp locations Shade: porcelain

Height Overall: 36"-66" (914-1776 mm)

STANDARD FINISHES Antiqued Boyd BrassBlackened Brass

- Satin Brass

SPECIALTY FINISHES

• Satin Nickel

OPTIONS White Shade with Gold Leaf

Black Shade with Gold Leaf










10821 Lily Sconce



LAMPING

LED

- 3.33 watts 2700 K, 90+ CRI Universal 120-277 V ~300 Fixture Lumens Lamps included with fixture

Driver must be mounted remotely

The LED lamps standard in this fixture can be dimmed with basic forward-phase dimming controls and wiring.

UL listed (or equivalent) for damp locations

Shade: gloss white opal glass

STANDARD FINISHES

- Antiqued Boyd BrassBlackened Brass
- Satin Brass


SPECIALTY FINISHES

Satin Nickel

- Charcoal
- Dark olive • Red
- Silver
- Warm Tan
 Navy Blue
- Black



10819 Lily Pendant 1



LAMPING

LED

- 5 watts
- 2700 k, 90+ CRI
- Universal 120-277 V
- ~450 Fixture Lumens
- Lamps included with fixture

Driver must be mounted remotely. The LED lamps standard in this fixture can be dimmed with basic forward-phase dimming controls and wiring.

UL listed (or equivalent) for damp locations

Height Overall: 36" - 72" (914 - 1829 mm)

Shade: gloss white opal glass

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES


Satin Nickel

- Charcoal
- Dark olive
- Red
- Silver
- Warm Tan
- Navy BlueBlack





10818 Lily Pendant 5





LAMPING

LED

- 20 watts 2700 K, 90+ CRI
- Universal 120-277 V • ~1150 Fixture Lumens
- Lamps included with fixture

The LED lamps standard in this fixture can be dimmed with basic forward-phase dimming controls and wiring.

UL listed (or equivalent) for damp locations

Height Overall: 48" - 84" (1219 - 2134 mm)

Shade: gloss white opal glass

- STANDARD FINISHES

 Antiqued Boyd Brass
- Blackened Brass
- Satin Brass


SPECIALTY FINISHES • Satin Nickel

- Charcoal
- Dark olive
- Red Silver
- Warm Tan
- Navy Blue
- Black





10820 Lily Pendant 9



LAMPING

LED

- 34 watts
- 2700 K 90+ CRI
- Universal 120-277 V
- ~2500 Fixture Lumens
- Lamps included with fixture

The LED lamps standard in this fixture can be dimmed with basic forward-phase dimming controls and wiring.

UL listed (or equivalent) for damp locations


Height Overall: 72" - 108" (1829 - 2743 mm)

Shade: gloss white opal glass STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass


SPECIALTY FINISHES

- CORD COLOR
- Charcoal
- Dark olive
- Red • Silver
- Warm Tan
- Navy Blue
- Black

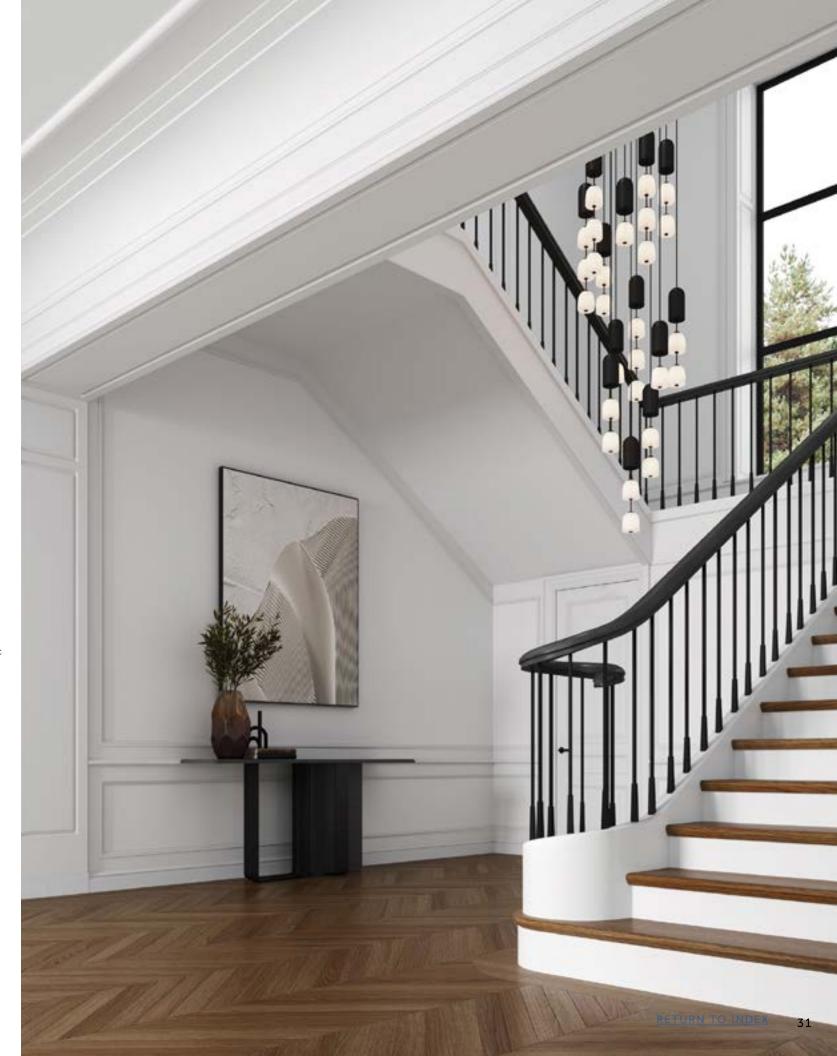



10854 Callisto Linear 36 10856 Callisto Linear 48 10858 Callisto Linear 60





LAMPING

10854 Linear 36

LED

34 watts, ~2700 lumens, Universal 120-277V Color Temperature: 2700K, 90+ CRI

10856 Linear 48

LED

48 watts, ~3600 lumens, Universal 120-277V Color Temperature: 2700K, 90+ CRI

10858 Linear 60

LED

60 watts, ~4500 lumens, Universal 120-277V Color Temperature: 2700K, 90+ CRI

The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10V low-voltage dimming controls and wiring.

UL listed (or equivalent) for damp locations

Height Overall: 36" - 78" (914 - 1981 mm)

Hanging element: Alabaster

There will be variations in color and veining of alabaster spheres

STANDARD FINISHES


- Antiqued Boyd BrassEarthen Brass
- Blackened Brass
- Satin Brass


SPECIALTY FINISHES





10849 Callisto Pendant 9 10849 Callisto Pendant 12 10851 Callisto Pendant 18





LAMPING

Callisto Pendant 9

LED

- 12 watts
- 2700 k, 90+ CRI
- Universal 120-277 V
- ~750 Fixture Lumens
- Lamps included with fixture

Callisto Pendant 12

LED

- 22 watts 2700 K 90+ CRI
- Universal 120-277 V
- ~ 1800 Fixture Lumens Lamps included with fixture

Callisto Pendant 18

LED


- 22 watts
- 2700 K 90+ CRI • Universal 120-277 V
- ~ 1800 Fixture Lumens
- Lamps included with fixture


Hanging element: Alabaster There will be variations in color and veining of alabaster spheres

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Earthen Brass
- Satin Brass


SPECIALTY FINISHES

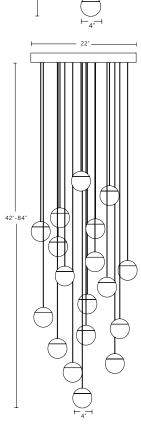

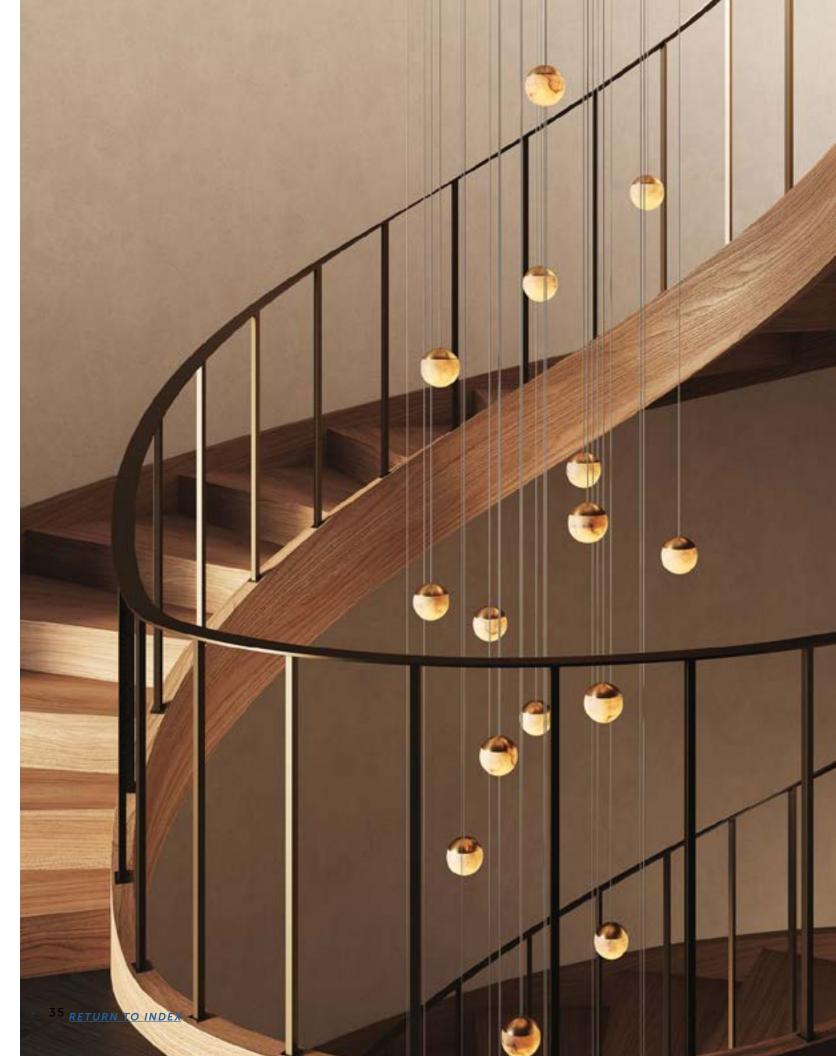



10739 Axis Sconce 24" 10736 Axis Sconce 30" 10737 Axis Sconce 36" 10749 Axis Sconce 42" 10738 Axis Sconce 48"

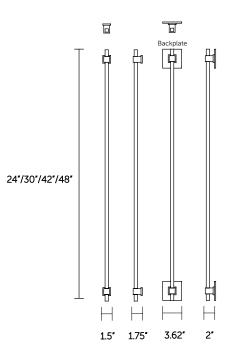

10739 (24")

LED

8 watts ~700 lumens Universal 120v-277v. Color Temperature: 3000° K 90+ CRI

10736 (30")

LED

11 watts ~850 lumens Universal 120v-277v. Color Temperature: 3000° K 90+ CRI

10737 (36")

LED

13 watts ~1000 lumens Universal 120v-277v. Color Temperature: 3000° K 90+ CRI

10749 (42")

LED

15 watts ~1000 lumens Universal 120v-277v. Color Temperature: 3000° K 90+ CRI 10738 (48")

LED

17 watts ~1000 lumens Universal 120v-277v. Color Temperature: 3000° K 90+ CRI


2700°k color temperature is available.

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES





LAMPING

LED

- 36 watts
 2700 K, 90+ CRI
 Universal 120-277 V
 ~2000 Fixture Lumens
 Lamps included with fixture

The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10v low voltage dimming controls and wiring.

Available in soda-lime and water white glass.

UL listed (or equivalent) for damp locations

STANDARD FINISHES • Black Granite

Cloud
 Dark Bronze
 Light Bronze
 Golden Gate Orange






38 RETURN TO INDEX



10808 Volterra Mirror Small 10809 Volterra Mirror Large



LAMPING

SMALL

- 32 watts
- 2700 K, 90+ CRI
- Universal 120-277 V
- ~1200 Fixture Lumens Lamps included with fixture

- LARGE • 40 watts
- 2700 K, 90+ CRI
- Universal 120-277 V
- ~1500 Fixture Lumens

Lamps included with fixture

3000°k color temperatures are available.

The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10v low voltage dimming controls and wiring.

Decorative Illuminated border: Alabaster

*There will be some variation veining and color of Alabaster.

UL listed (or equivalent) for damp locations

STANDARD FINISHES


- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES





10813 Numi Linear Pendant 6' 10814 Numi Linear Pendant 8'



72.25"/96.25"

LAMPING

LED

- 70 watts
- 2700 k, 90+ CRI
- Universal 120-277 V
- ~2750 fixture lumens up, ~2500 fixture lumens down. Lamps included with fixture

3000°k and 3500°k color temperature is available.

The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10v low-voltage dimming controls and wiring. Drivers must be mounted remotely.

Height Overall: 12" - 72" (300 - 1830 mm)


Specify Wood options: Butternut, Roasted Brown, and Squall\

Up-light and down-light wired for use with either one or two circuits


UL listed (or equivalent) for damp locations

- STANDARD FINISHES

 Antiqued Boyd Brass
- Blackened BrassDark Bronze
- Satin Brass

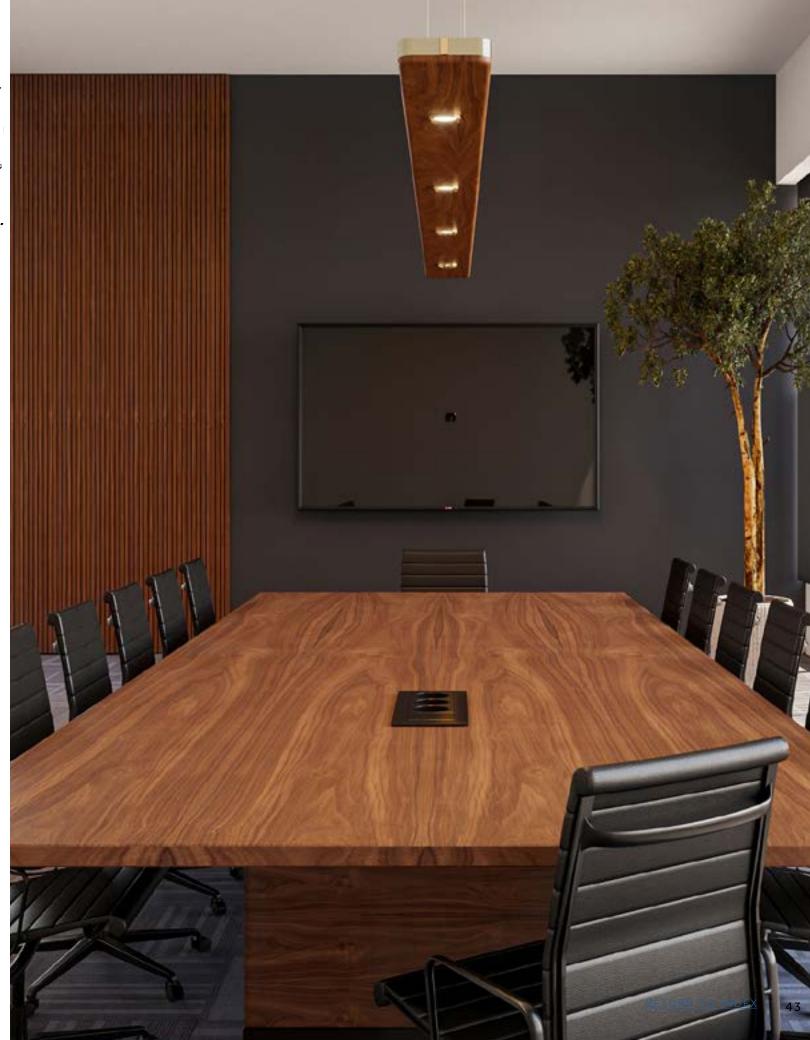

DA3040 NUMI 36/48/60



LAMPING

DA3040-36

LED

40 watts ~2400 Lumens Universal 120v-277v. Color Temperature: 2700K 90+ Cri

DA3040-48

LED

47 watts ~2800 Lumens Universal 120v-277v. Color Temperature: 2700K 90+ Cri

DA3040-60

LED

60 watts ~4300 Lumens Universal 120v-277v. Color Temperature: 2700K 90+ Cri

Drivers must be mounted remotely.

Height Overall: 12" - 72" (300 - 1830 mm)

Up-light and down-light wired for use with either one or two circuits


UL listed (or equivalent) for damp locations

Specify Wood options: Butternut, Roasted Brown, and Squall

STANDARD FINISHES


- Antiqued Boyd BrassBlackened Brass

- Dark BronzeSatin Brass

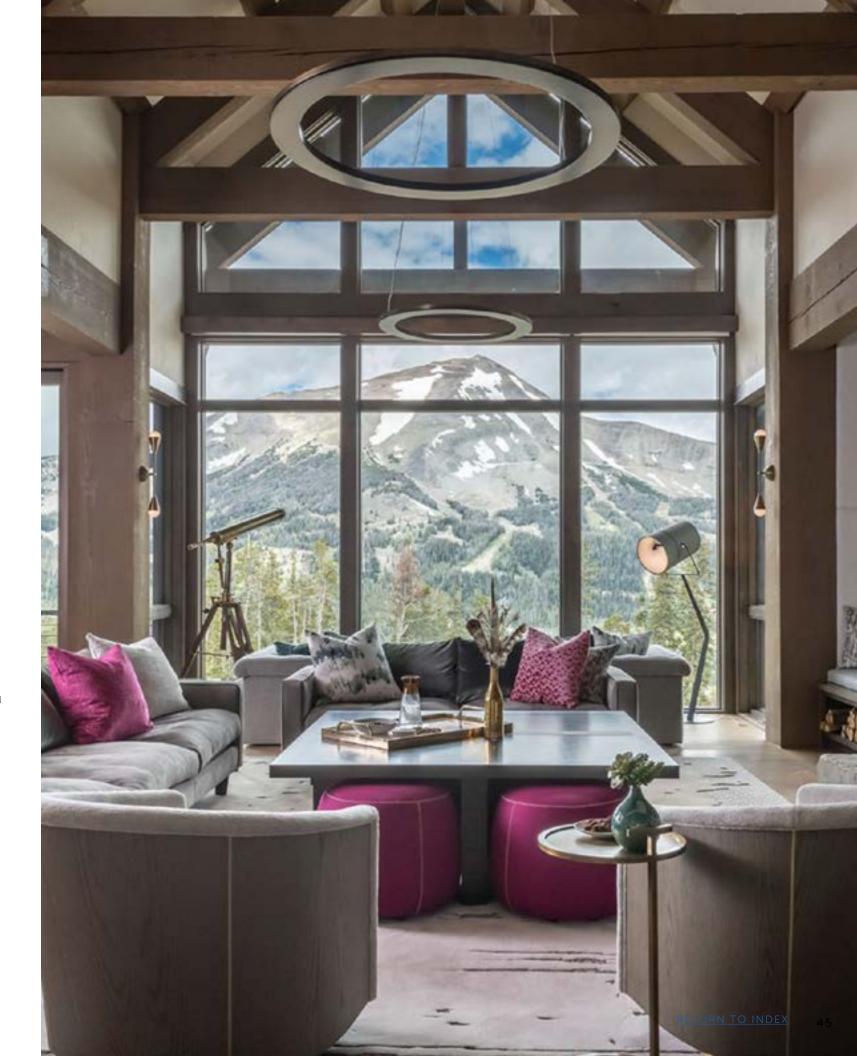



10796 Duet Pendant





LAMPING

- 18 watts max 2700 k,, 90+ CRI Universal 120-277 V
- ~1300 fixture lumens
- Lamp included with fixture

3000°k color temperature is available.

The LED lamps standard in this fixture can be dimmed with 0-10V ELV, or Triac style dimmers


Height Overall: 30"-60" (762-1524 mm)

UL listed (or equivalent) for damp locations

Shade: clear rippled glass or white opal rippled glass


STANDARD FINISHES • Antiqued Boyd Brass • Blackened Brass • Satin Brass

SPECIALTY FINISHES

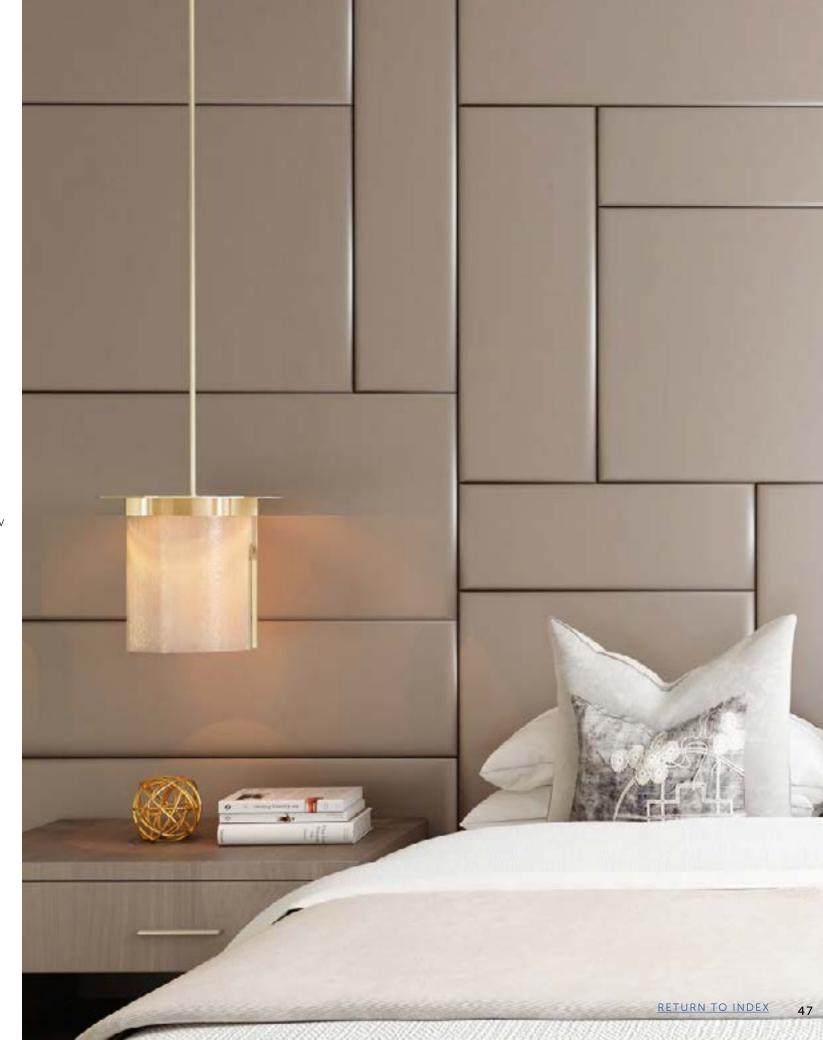



10796 Duet Sconce



LAMPING

LED

- 6 watts 2700 K, 90+ CRI Universal 120-277 V
- ~ 500 Fixture Lumens
- Lamps included with fixture

3000°k color temperature is available.

The driver must be mounted remotely.

The LED lamps standard in this fixture can be dimmed with 0-10V ELV, or Triac style dimmers $\frac{1}{2}$

Center of outlet box to top of fixture: 2.62" (67 mm)

For ADA compliance, height of outlet box above finished floor: 92" (2337 mm)

UL listed (or equivalent) for damp locations

Shade: clear rippled glass or white opal rippled glass

STANDARD FINISHES


- Antiqued Boyd BrassBlackened BrassSatin Brass

SPECIALTY FINISHES





10705 Ghost Parabolica 60" x 30" 10706 Ghost Parabolica 72" x 30" 10707 Ghost Parabolica 72" x 36" 10708 Ghost Parabolica 84" x 36"



LAMPING

LED

- 90 watts
- 2700 K, 90+ CRI
- Universal 120-277 V
- ~ 4100 Fixture Lumens
- Lamps included with fixture

3500 K color temperature is available

The LED lamps standard in this fixture can be dimmed with ELV; or MLV; or 0-10V low-voltage dimming controls and wiring.

Micro-etched: 56% uplight/44% downlight

Stainless steel aircraft cables can be minimally adjustedon-site via spring-loaded cable grips.

Height Overall: 30" - 84" (762 - 2134 mm)

UL listed (or equivalent) for damp locations


STANDARD FINISHES

- Dark BronzeLight BronzeBlack Granite
- Cloud





10702 Ghost Round 36 10703 Ghost Round 48



36"/48"

LAMPING

LED

- 81 watts 2700 K, 90+ CRI
- Universal 120-277 V
 ~ 3600 Fixture Lumens
- Lamps included with fixture

Standard fixture with integral driver is dimmable with 0-10v, ELV, or Triac dimming systems. Contact your local rep for additional information.

Micro-etched: 56% uplight/44% downlight

Stainless steel aircraft cables can be minimally adjustedon-site via spring-loaded cable grips.

UL listed (or equivalent) for damp locations

Height Overall: 24" - 48" (610 - 1219 mm)


STANDARD FINISHES

- Dark BronzeLight BronzeBlack GraniteCloud





10701 Ghost Rectangle Pendant



LAMPING

LED

- 81 watts 2700 K, 90+ CRI Universal 120-277 V
- ~ 3600 Fixture Lumens
- Lamps included with fixture

Standard fixture with integral driver is dimmable with 0-10v, ELV, or Triac dimming systems. Contact your local rep for additional information.

Micro-etched: 56% uplight/44% downlight

Stainless steel aircraft cables can be minimally adjusted on-site via spring-loaded cable grips

UL listed (or equivalent) for damp locations

Height Overall: 30" - 54" (762 - 1372 mm)

STANDARD FINISHES • Dark Bronze


- Light BronzeBlack Granite
- Cloud



© 2025 Boyd Lighting Company | Rev 01/29/25



10780 Nebula Pendant Small 10781 Nebula Pendant Large



LAMPING

10780

LED

- 6 watts
- 2700 K 90+ CRI
- Universal 120-277 V~400 Fixture Lumens
- Lamps included with fixture

10781

LED

- 6 watts
- 2700 K 90+ CRI Universal 120-277 V
- ~400 Fixture Lumens • Lamps included with fixture

3000°k color temperature is available.

The LED lamps standard in this fixture can be dimmed with 0-10V ELV, or Triac style dimmers

Height Overall: 18"/24" - 72" (457/610 - 1829 mm)

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES


• Satin Nickel

- Charcoal
- Dark olive Red
- Silver
- Warm Tan
- Navy Blue
- Black





10782 Nebula Pendant 3



LAMPING

LED

- 18 watts 2700 K 90+ CRI Universal 120-277 V ~1200 Fixture Lumens
- Lamps included with fixture

The LED lamps standard in this fixture can be dimmed with $0-10\mathrm{V}$ ELV, or Triac style dimmers

Height Overall: 30" - 72" (762 - 1829 mm)

3000°k color temperature is available.

STANDARD FINISHES

- Antiqued Boyd BrassBlackened Brass
- Satin Brass

SPECIALTY FINISHES


Satin Nickel

- Charcoal Dark olive
- Red
- Silver
- Warm Tan • Navy Blue
- Black





10783 Nebula Pendant 9

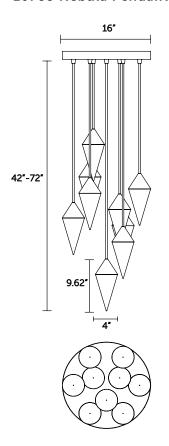

LAMPING

LED

- 18 watts 2700 K 90+ CRI
- Universal 120-277 V
- ~1200 Fixture Lumens
- Lamps included with fixture

3000°k color temperature is available.

The LED lamps standard in this fixture can be dimmed with 0-10V ELV, or Triac style dimmers

Pendant: Alabaster and Brass

There will be some variation in color and veining of Alabaster.

Custom configurations and sizes available upon request

Height Overall: 30" - 72" (762 - 1829 mm)

STANDARD FINISHES

- Antiqued Boyd BrassBlackened Brass
- Satin Brass

SPECIALTY FINISHES


• Satin Nickel

CORD COLOR Charcoal

- Dark olive
- Red
- Silver
- Warm Tan
- Navy Blue
- Black



10744 Ovalo Chain Single Pentant 24" 10745 Ovalo Chain Singe Pendant 36"



LAMPING

LED

- 50 watts
- 2700 K 90+ CRI Universal 120-277 V
- ~ 3800 Fixture LumensLamps included with fixture

3000°k color temperature is available.


Standard fixture with integral driver is dimmable with 0-10v, ELV, or Triac dimming systems. Contact your local rep for additional information.

Height Overall: 78"-120" (1981-3048 mm)


STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES

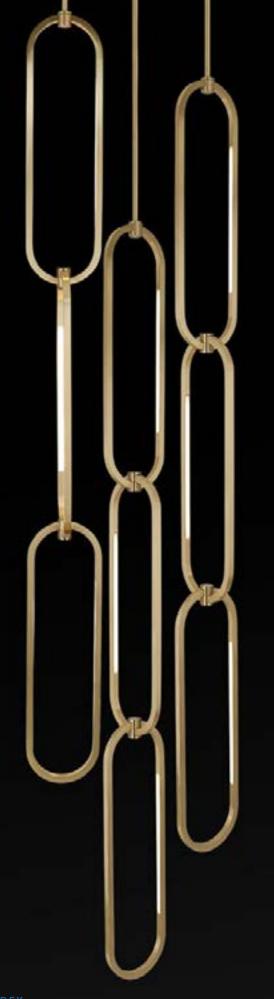

10770 Ovalo Chain Cluster 24" 10771 Ovalo Chain Cluster 36"

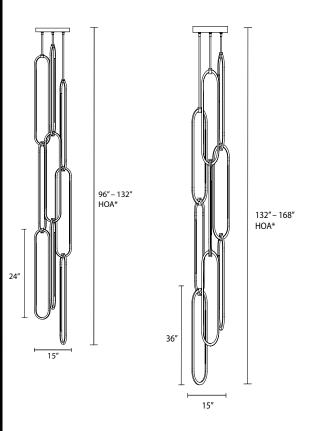

LAMPING

LED

- 150 watts 2700 k 90+ CRI Universal 120-277 V ~ 11000 Fixture Lumens
- Lamps included with fixture

3000°k color temperature is available.

Standard fixture with integral driver is dimmable with 0-10v, ELV, or Triac dimming systems. Contact your local rep for additional information.UL listed (or equivalent) for damp locations

Height Overall:

#10770

96"-132" (2438-3353 mm)


#10771

132"-168" (3353-4267 mm)

STANDARD FINISHES


- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES • Satin Nickel

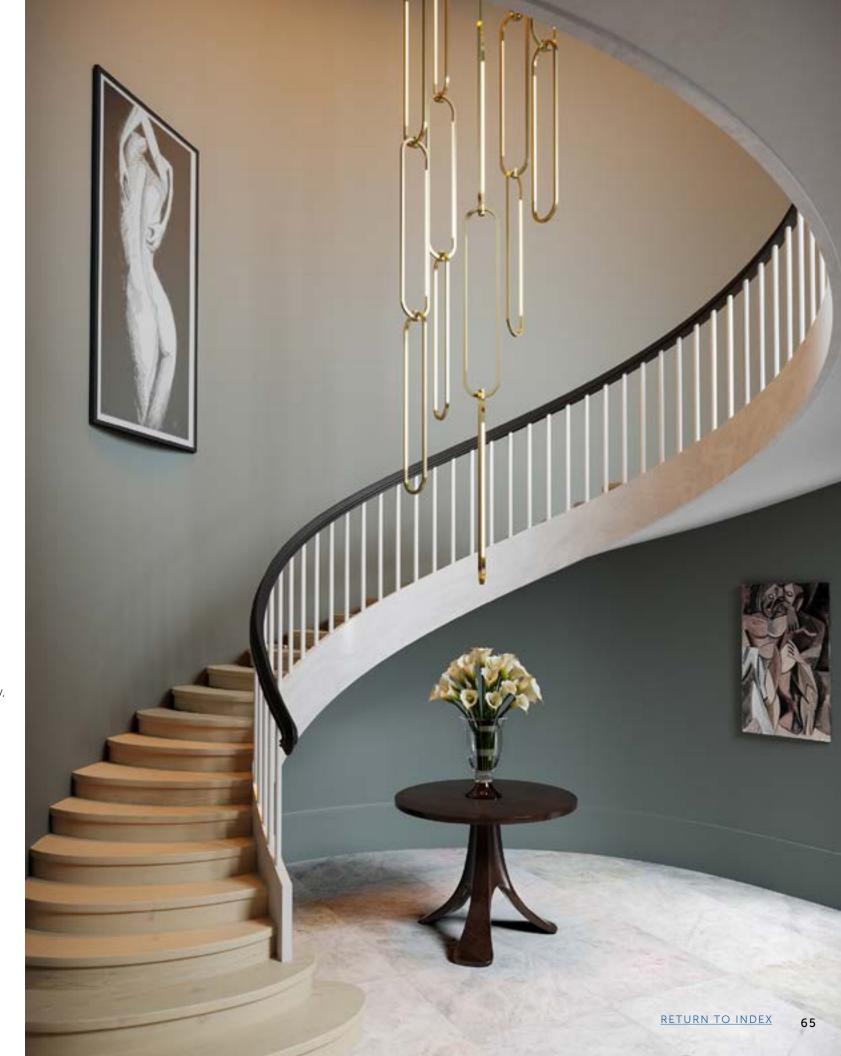

RETURN TO INDEX

10740 Ovalo Single 24" 10742 Ovalo Single 36"



LAMPING

LED

- 25 watts
- 2700 k 90+ CRI
- Universal 120-277 V
- ~ 1900 Fixture Lumens
- Lamps included with fixture

3000°k color temperature is available.

Standard fixture with integral driver is dimmable with 0-10v, ELV, or Triac dimming systems. Contact your local rep for additional information.

Height Overall:

#10740 30"-54" (914-1372 mm)

#10742 42"-66" (1070-1680 mm)

STANDARD FINISHES


- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES





10741 Ovalo Double 24" 10743 Ovalo Double 36"



LAMPING

LED

- 25 watts
- 2700 k 90+ CRI • Universal 120-277 V
- ~ 1900 Fixture Lumens
- Lamps included with fixture

3000°k color temperature is available.

Standard fixture with integral driver is dimmable with 0-10v, ELV, or Triac dimming systems. Contact your local rep for additional information.

Height Overall:

#10741

30"-54" (914-1372 mm)

#10743

42"-66" (1070-1680 mm)

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass


SPECIALTY FINISHES







10725 Loop Single Sconce



LAMPING

LED

- 7 watts max 2700 K 90+ CRI Universal 120-277 V
- ~500 fixture lumens
- Lamp included with fixture

3000°k and 3500°k color temperatures, and Warm Dim LEDs are available.

Standard fixture with integral driver is dimmable with 0-10v, ELV, or Triac dimming systems. Upcharges will apply for custom remote dimming. Remote dimmable drivers will offer up to 50% greater lumen output. Contact your local rep for additional information.

UL listed (or equivalent) for damp locations

STANDARD FINISHES


- Antiqued Boyd BrassBlackened Brass
- Satin Brass

SPECIALTY FINISHES





10726 Loop Double Sconce



LAMPING

LED

- 18 watts max 2700 K 90+ CRI Voltage 120 V 277 V ~1000 fixture lumens Lamp included with fixture

3000°k and 3500°k color temperatures, and Warm Dim LEDs are available.

Driver must be mounted remotely.

Standard fixture with integral driver is dimmable with 0-10v, ELV or Triac dimming systems. Contact your local rep for additional information.

UL listed (or equivalent) for damp locations

- STANDARD FINISHES

 Antiqued Boyd Brass

 Blackened Brass

 Satin Brass

SPECIALTY FINISHES - Satin Nickel





10728 Loop Pendant 36" 10729 Loop Pendant 48" 10730 Loop Pendant 60"





LAMPING

- LED

 36 watts

 2700 K 90+ CRI

 Universal 120-277 V

 ~3000 Fixture Lumens

 Lamps included with fixture

Standard fixture with integral driver is dimmable with 0-10v, ELV, or Triac dimming systems. Contact your local rep for additional information

UL listed (or equivalent) for damp locations

STANDARD FINISHES


- Antiqued Boyd Brass
 Blackened Brass
 Satin Brass

SPECIALTY FINISHES • Satin Nickel





10746 Branch Pendant 5' 10747 Branch Pendant 6" 10748 Branch Pendant 7"



LAMPING

10746 (60")

LED

43 watt ~3300 lumens Universal 120v-277v. Color Temperature: 2700 K 90+ CRI

10747 (72")

LED

50 watt ~3850 lumens Universal 120v-277v. Color Temperature: 2700 K 90+ CRI

10748 (84")

LED

50 watt ~3850 lumens Universal 120v-277v. Color Temperature: 2700 K 90+ CRI

3000°k color temperature is available.

The LED lamps standard in this fixture can be dimmed with 0-10VELV, or Triac style dimmers

Custom configurations and sizes available upon request

Height Overall: 24" - 54" (610 - 1370 mm)

STANDARD FINISHES


- Antiqued Boyd BrassBlackened Brass
- Satin Brass

SPECIALTY FINISHES





10722 Branch Floor



LAMPING

LED

- 14 watts max 2700 K 90+ CRI
- Universal 120-277 V
- ~850 fixture lumens
- Lamp included with fixture

3000°k color temperatures is available.


STANDARD FINISHES - Satin Brass

- Antiqued Boyd Brass
- Blackened Brass

SPECIALTY FINISHES



10721 Branch Table



LAMPING

LED

- 14 watts max 2700 K 90+ CRI Universal 120-277 V ~850 fixture lumens
- Lamp included with fixture

3000°k color temperatures is available.

STANDARD FINISHES


- Satin Brass
 Antiqued Boyd Brass
 Blackened Brass

SPECIALTY FINISHES • Satin Nickel





10720 Branch Sconce



LAMPING

LED

- 14 watts max 2700 K, 90+ CRI Universal 120-277 V
- ~850 fixture lumens
- Lamp included with fixture

Driver must be mounted remotely.

3000°k color temperatures is available.

Standard fixture with integral driver is dimmable with 0-10v, ELV or Triac dimming systems. Contact your local rep for additional information.

STANDARD FINISHES - Satin Brass


- Antiqued Boyd BrassBlackened Brass

SPECIALTY FINISHES





10698 Santa Fe Sconce



LAMPING

- LED

 6.3 watts max

 2700 K, 90+ CRI

 Universal 120-277 V

 ~400 fixture lumens

 Lamp included with fixture

"Upcharges will apply for LED dimming Driver must be mounted remotely.

UL listed (or equivalent) for damp locations

STANDARD FINISHES


SPECIALTY FINISHES

• Burnished Bronze





10699 Pueblo Sconce



LAMPING

- 4.6 watts max 2700 K, 90+ CRI Universal 120-277 V ~300 fixture lumens Lamp included with fixture

Driver must be mounted remotely.

UL listed (or equivalent) for damp locations

STANDARD FINISHES


Cloud

SPECIALTY FINISHES - Burnished Bronze





10700 Taos Sconce



LAMPING

- LED

 4.6 watts max

 2700 K, 90+ CRI

 Universal 120-277 V

 ~300 fixture lumens

 Lamp included with fixture

Driver must be mounted remotely.

UL listed (or equivalent) for damp locations

STANDARD FINISHES


Cloud

SPECIALTY FINISHES
- Burnished Bronze





10712 Plateau Round 14" 10711 Plateau Round 10" 10710 Plateau Round 6"



LAMPING

Plateau Round 14"/ 10"

LED

- 6.3 watts max 2700 K, 90+ CRI Universal 120-277 V

- ~400 fixture lumens Lamp included with fixture

Plateau Round 6"

LED

- 2.4 watts max 2700 K, 90+ CRI
- Universal 120-277 V
- ~200 fixture lumens
- Lamp included with fixture

Driver must be mounted remotely.

Upcharges will apply for LED dimming.


STANDARD FINISHES • Satin Brass • Antiqued Boyd Brass

SPECIALTY FINISHES





10716 Plateau Square 14" 10715 Plateau Square 10" 10714 Plateau Square 6"



LAMPING

Plateau Square 14"/ 10"

LED

- 6.3 watts max
- 2700 K, 90+ CRI Universal 120-277 V
- ~400 fixture lumens Lamp included with fixture

Plateau Square 6"

- LED
 2.4 watts max
- 2700 K, 90+ CRI
- Universal 120-277 V
- ~200 fixture lumens • Lamp included with fixture

Driver must be mounted remotely. Upcharges will apply for LED dimming.

STANDARD FINISHES


- Satin BrassAntiqued Boyd Brass

SPECIALTY FINISHES





10694 Obi Sconce



LAMPING

LED

- 18 watts max 2700 K, 90+ CRI Universal 120-277 V
- ~700 fixture lumens
- Lamp included with fixture

Standard fixture with integral driver is dimmable with 0-10v, ELV, or Triac dimming systems. Contact your local rep for additional information.


STANDARD FINISHES • Blackened Aluminum

- Satin Aluminum
- Cloud
- Gloss White
 Dark Bronze





10681 Scorpio Sconce 24" 10683 Scorpio Sconce 36"



LAMPING

LED

- 17 watts max
- 2700 K
- ~1100 lumens

#10683

LED


- 2700 K
- Universal 120v-277v
- ~1500 lumens
- Lamps included with fixture

or Triac dimming systems. Contact your local rep for additional information.

Backplate is cast and may exhibit slight imperfections, consistent with sand castings


- Antiqued Boyd Brass
- Satin Brass

- Satin Nickel
- Polish Nickel

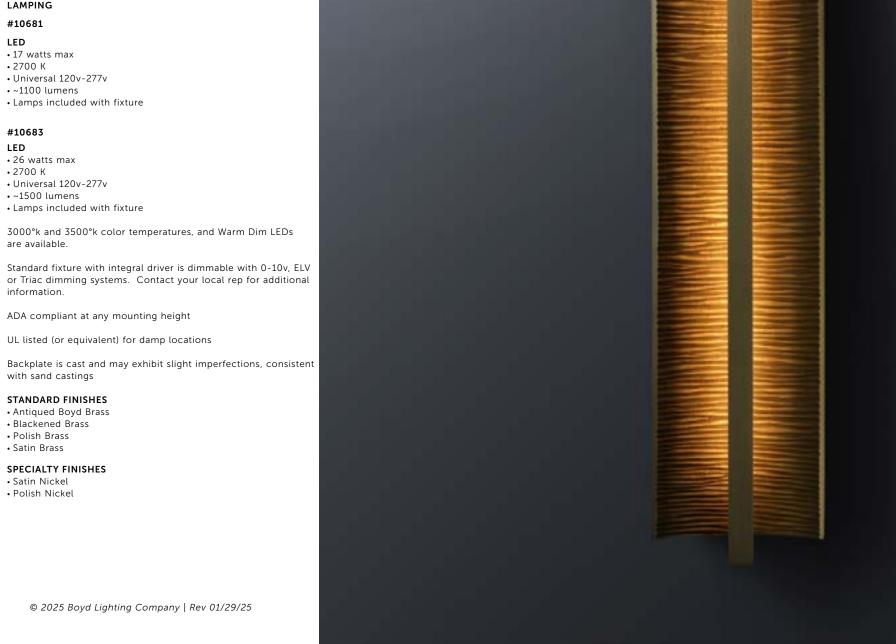



DA2026 Alex Sconce



LAMPING

LED

- 5 watts max
- Universal 120v-277v
- 2700 K, 90+ CRI
- ~725 lumens

Lamps included with fixture

3500°k color temperatures, and Warm Dim LEDs are available.

LED Driver in unit

Standard fixture with integral driver is dimmable with 0-10v, ELV or Triac dimming systems. Contact your local rep for additional information.

UL listed (or equivalent) for damp locations

Glass is hand made by an artist and each piece will exhibit slight variations

STANDARD FINISHES

- Antiqued Boyd BrassBlackened Brass
- Polish Brass
- Satin Brass


SPECIALTY FINISHES

- Satin Nickel
- Polish Nickel





DA2016-36/48/61 Isa Pendant 48"



36" | 48" | 60"

LAMPING

DA2016-36

Lightsource: LED

18 watts ~2000 lumens Universal 120v-277v. Performance:

Color Temperature: 2700 K 90 + CRI

DA2016-48

Lightsource:

Performance: 34 watts ~2600 lumens Universal 120v-277v.

Color Temperature: 2700 K 90 + CRI

DA2016-60

Lightsource: LED

36 watts ~2750 lumens Universal 120v-277v. Performance:

Color Temperature: 2700 K 90 + CRI

3000°k and 3500°k color temperatures are available. DRIVER

Standard fixture with integral driver is dimmable with 0-10v, ELV or Triac dimming systems. Contact your local rep for additional information.

UL listed (or equivalent) for damp locations

Height Overall: 24" - 48" (610 mm - 1219mm)

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES

• Satin Nickel

OPTIONS

• Cast Crystal or Cast Rock





DA2027-16 Isa Sconce 16" DA2027-30 Isa Sconce 30"

LAMPING

#DA2027-16

LED

- 20 watts max Universal 120v-277v
- 2700 K, 90+CRI
- ~975 lumens

Lamps included with fixture

UL listed (or equivalent) for damp locations

#DA2027-30

LED

- 20 watts max
- Universal 120v-277v
- 2700 K, 90+CRI
- ~1500 lumens
- Lamps included with fixture

3000°k and 3500°k color temperatures are available.

Driver must be mounted remotely

Standard fixture with integral driver is dimmable with 0-10v, ELV or Triac dimming systems. Contact your local rep for additional

For ADA compliance height of center of outlet box above floor: 95" (241 cm)

Due to the narrow profile, this fixture requires mud work. A 3.5" mudding plate is provided.

If mudding is not an option, a larger backplate can be offered as a custom order.

Glass is hand made by an artist and each piece will exhibit slight variations

UL listed (or equivalent) for damp locations

STANDARD FINISHES

- Antiqued Boyd Brass
- Blackened Brass
- Satin Brass

SPECIALTY FINISHES

Satin Nickel

OPTIONS

• Cast Crystal or Cast Rock



