

Instructions for Installation:
C-10419_22 Venice Ceiling/Pendant

Lamping Specifications:
Incandescent:
Medium Base, Three A-19, 100w max

Fluorescent: 120v-277v
Four, CFTR26W/Gx24q or Four, CFTR32W/
Gx24q or Four, CFTR42W/Gx24q

IMPORTANT! AT ALL TIMES WIRING TO BE DONE PER NATIONAL ELECTRIC CODES (NEC) OR APPLICABLE LOCAL CODES

**IMPORTANT | CAUTION
READ ALL INSTRUCTIONS THOROUGHLY.
TURN OFF POWER AT CIRCUIT BREAKER OR
FUSE BOX BEFORE PROCEEDING.**

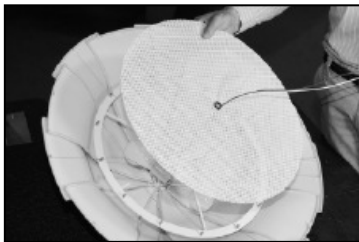


Figure 1

Step 1: Turn off power to circuit at fuse box/circuit breaker.

Step 2: Install lamps per relamp label, and install diffuser. (Fig 1)

Step 3: (Step 3 applies to HOAs of 28" and longer) Install decorative stem cluster and top stem. (Fig's 2 & 3)

Step 4: Install aligner, canopy, and mounting hardware; slide aligner nut and canopy down the stem. (Fig 4)

Step 5: Check inner shade petals and adjust if necessary so they are centered between outer shade petals.

Step 6: Attach mounting hardware to J-box and make wire connections between the fixture and power supply wires. Connect the white fixture wire to the neutral supply wire; typically white, connect the black fixture wire to the hot supply wire; typically black, connect the copper fixture wire to the ground wire and/or the ground terminal in the outlet box. Push all connections inside of junction box. (Fig 5)

Step 7: Slide canopy against ceiling and secure in place with aligner nut. (Fig 6)

Step 8: Restore power to circuit.



Figure 4



Figure 2



Figure 5

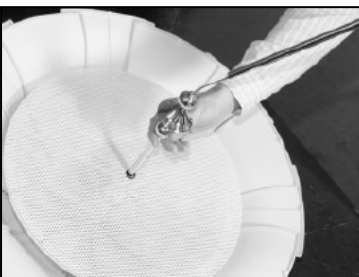


Figure 3



Figure 6