

K-0061 Cascade divide  
24" ceiling module

Lamping Specifications

Halogen

- 120 volt, two, MRC-11\*, 35w each, 12 volt integral transformers
- 277 volt, two, MRC-11\*, 35w each, 12 volt integral transformers
- 220 volt, two, MRC-11\*, 35w each, 12 volt integral transformers  
(For Euro/Hong Kong market)

\* Two 36 flood or 13 spot lamps with opaque silver reflectors recommended.

**IMPORTANT | CAUTION**

Read all instructions thoroughly, and turn off power at circuit breaker or fuse box before proceeding.

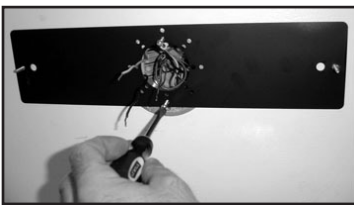


Figure 1

Step 1 Temporarily attach the black mounting bracket onto the junction box in the exact position that your Cascade Divide will be hanging. (See Figure 1)

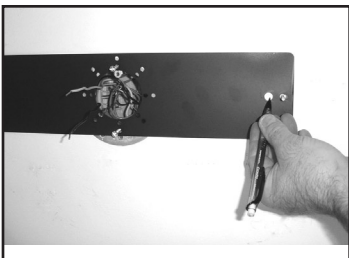


Figure 2

Step 2 Using the mounting bracket as a template, mark the position of the holes closest to the ends of the bracket. This is where you will be installing the plastic anchors for additional support. (See Figure 2)



Figure 3

Step 3 Remove the mounting bracket from the junction box, and drill a 1/4" hole in both locations where the plastic anchors will be located, then install the plastic anchors. (See Figure 3)

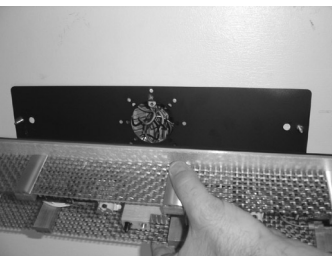


Figure 4

Step 4 Reattach the mounting bracket onto the junction box, and secure both ends to the plastic anchors using the wood screws.

Step 5 Make wire connections using twist-on connectors: connect the black fixture wire to the hot supply wire (typically black); connect the white fixture wire to the neutral supply wire (typically white); connect the copper fixture wire to the ground wire or ground terminal at the outlet box. Push all connections inside of junction box, then secure fixture to the mounting bracket using the 2 battery nuts. (See Figures 4 & 5)

Step 6 Install the crystal plates by carefully pushing them onto the black guide pins and firmly tightening the pre-fastened screws. (See Figures 6 & 7)

Step 7 Install the halogen lamps by pushing them into the lamp holders, then restore power to the circuit.

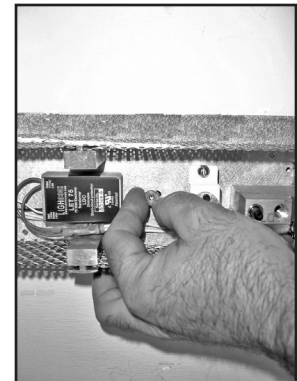


Figure 5

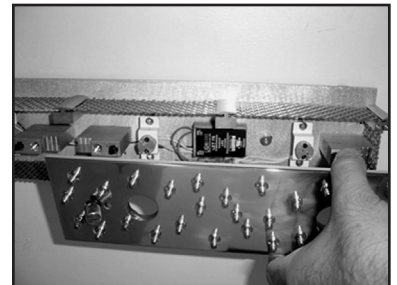


Figure 6

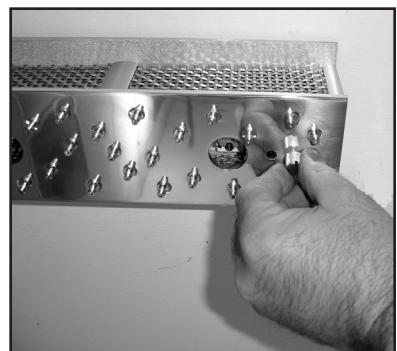


Figure 7

Thank you for your purchase and enjoy your Kentfield Collection fixture.