



## Installation Instructions

Revised 02/08/05



K-0035 Cascade  
Wall Bracket I

K-0036 Cascade  
Wall Bracket II

### Lamping Specifications

#### Halogen

- 120 volt, MRC-16\*, 50w each, 12 volt integral transformers
- 277 volt, MRC-16\*, 50w each, 12 volt integral transformers

\* Two 36 flood or 13 spot lamps with opaque silver reflectors recommended.

### IMPORTANT | CAUTION

Read all instructions thoroughly, and turn off power at circuit breaker or fuse box before proceeding.

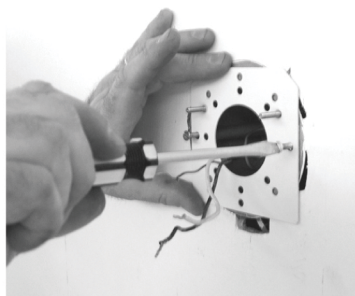


Figure 1

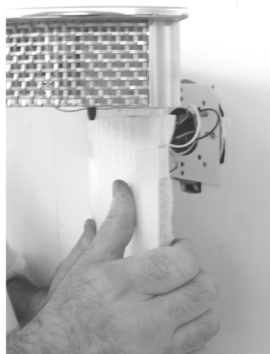


Figure 2

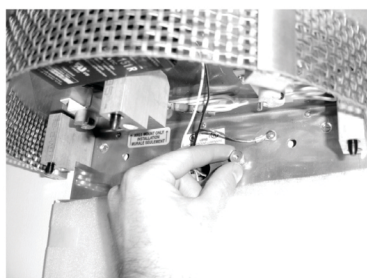


Figure 3

Step 1 Carefully remove fixture from packaging. Avoid using sharp blade on packaging as it may damage the finish.

Step 2 Attach mounting bracket to the outlet box. (See Figure 1)

Step 3 Before making wire connections, place fixture over the studs in the mounting plate so as to properly align fixture and mark the positions of the additional mounting holes. Install drywall anchors or other similar type hardware that will allow for fastening of back plate to the wall at location points other than junction box.

#### IMPORTANT!

BE SURE ALL POWER IS OFF PRIOR TO INSTALLING FIXTURE. READ ALL INSTRUCTIONS BEFORE PERFORMING ANY WORK.

IMPORTANT! AT ALL TIMES WIRING TO BE DONE PER NATIONAL ELECTRIC CODES (NEC) OR APPLICABLE LOCAL CODES.

Step 4 Make wire connections using the twist-on connectors: connect black fixture wire to black supply wire; white fixture wire to white supply wire, fixture ground wire to ground wire or terminal. Push all connections inside outlet box. (See Figure 2)

Step 5 Attach the fixture back plate to the mounting bracket. Fasten thumb knob screws to tighten fixture to mounting bracket. (See Figure 3)

Step 6 Anchor fixture to the wall using drywall anchors (supplied) at key locations. (See Figure 4)

Step 7 Assemble the decorative suspension plate to the light housing. Align using guide pins. (See Figure 5)

Step 8 Tighten decorative crystal plate with pre-fastened screws. Note: Illustration is shown without crystal strands for clarity of installation. (See Figure 6)

Step 9 Install MR-lamps/bulbs (included) Restore power to circuit and illuminate lamps.

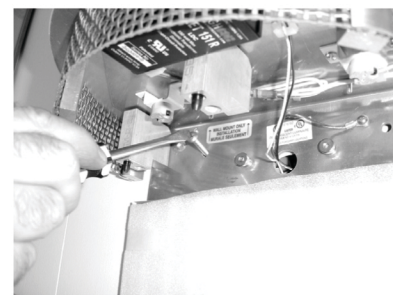


Figure 4

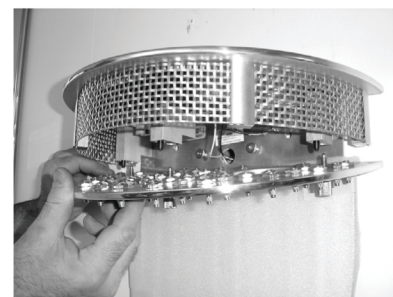


Figure 5

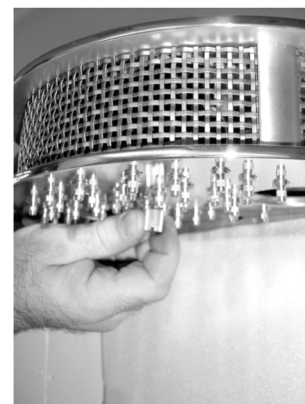


Figure 6

Thank you for your purchase and enjoy your Kentfield Collection fixture.